



# 8 ports full Gigabit PoE Switch

## BC208PG

### Overview

To satisfy the increasing demand of PoE for Gigabit Ethernet (GE) networking, it has developed this series of PoE GE switches. The BC208PG is an 8-port GE switch, which provides 8x 10/100/1000M 802.3af PoE ports.

The BC208PG supports 120-watt PoE budget to drive up to 8x IEEE 802.3af compliant powered devices simultaneously. The PoE feature enables the BC208PG an efficient and cost-effective solution for SMB, SOHO and other similar fields to deploy the PoE network for the wireless access points, IP-based surveillance cameras or IP phones anywhere easily and efficiently.

### Features

- ✧ Built-in efficient switching core to implement flow control and reduce broadcast packets
- ✧ Standard Compliance: IEEE802.3 Ethernet, IEEE802.3u Fast Ethernet, IEEE802.3ab Gigabit Ethernet, IEEE802.3x Flow Control, IEEE802.3af PoE
- ✧ 10/100/1000M copper ports automatically identify the direct line and cross-line, compatible with various cards, switches, HUB and other Ethernet devices
- ✧ Store-and-forward mechanism is employed to avoid packet loss and error frames
- ✧ Support full-duplex flow control / half-duplex back pressure mode
- ✧ Maximum of 9216 bytes Jumbo frame supported
- ✧ 52V DC power input
- ✧ -10 To 50 °C operating temperature to meet a variety of complex environments
- ✧ Copper ports support ESD protection
- ✧ Support PoE power supply up to maximum of 15W per port



# 8 ports full Gigabit PoE Switch

## BC208PG

### ❖ Specifications

Parameter	Specifications
Access mode	10/100/1000Mbps
Standard	IEEE802.3 Ethernet, IEEE802.3u Fast Ethernet, IEEE802.3ab Gigabit Ethernet, IEEE802.3x Flow Control, IEEE802.3af PoE
Transmission distance	Category-5 twisted pairs: 100m
Port	Eight RJ45 ports: Connecting STP/UTP category-5 twisted pairs, EIA568A/B
Operation mode	Store and Forward
Flow control	Full duplex: flow control; Half duplex: back pressure
Address table	8K-entry look-up table with auto-learning function
Buffer space	Built in 1Mb SRAM for data buffer
BER	<10 <sup>-9</sup>
MTBF	30,000 hours
LED indicator	Power Supply : PWR (1~8)UTP Port: POE, SPD, L/A
Power supply	Power Input Range: 52VDC, Power Interface: DC Power Jack
Power Requirement	52VDC@2.5A
Power consumption	<5W
PoE Power Pins	RJ45: Mode A -- pins 1 and 2 for PoE(+); 3 and 6 for PoE(-)(Default) Mode B -- pins 4 and 5 for PoE(+); 7 and 8 for PoE(-)(Optional)
Operating temperature	-0~50°C
Operating humidity	5%~90% non-condensing




# 8 ports full Gigabit PoE Switch

## BC208PG

Storage Temperature	-40~75°C
Storage humidity	5%~90% non-condensing
Dimensions	170.50mm (W)×80.50mm (D)×30.00mm (H)
Weight	1.2kg


### ❖ Application

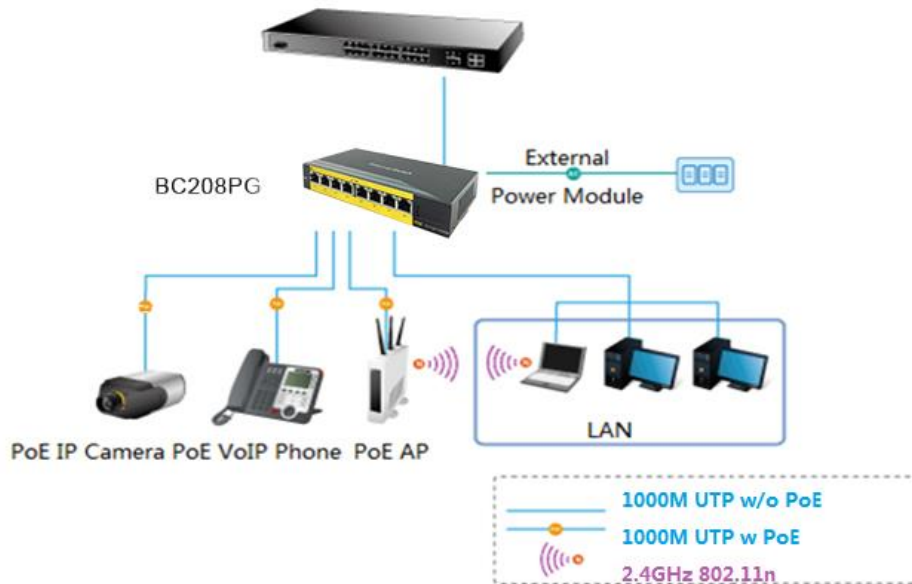



# 8 ports full Gigabit PoE Switch BC208PG

## Dimensions

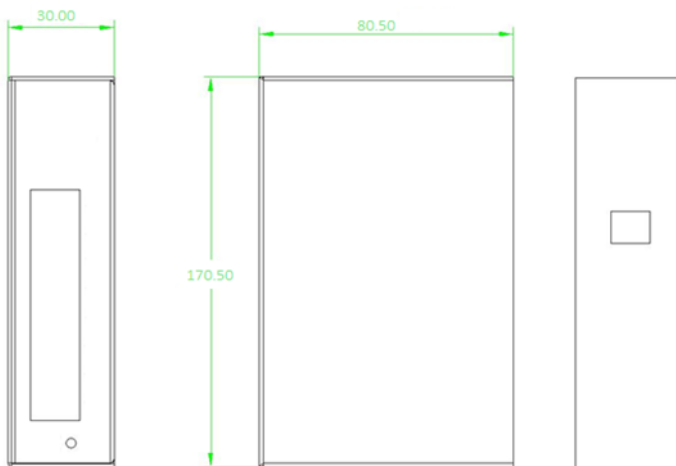

### **BORN ELECTRONICS LIMITED**

#### **ADDRESS:**

#94A  
Goldsmith Avenue  
London  
United Kingdom

Phone: +4479 1989 8604

Email: [info@bornelectronics.com](mailto:info@bornelectronics.com)

#### **WARRANTY:**

2 YEARS (EXPANDABLE UPTO 4 YEARS)