

1250Mbps 1550nm Single-Mode 120km SFP Transceiver

BT-SFP-G120-1.25G

Ideal for:



Telecom



Hotels & Resorts



Universities



Healthcare



Public Places



Airport



Transport



Industries

OVERVIEW

BT-SFP-G120-1.25G is a high performance, cost effective modules, which is supporting up to 1.25Gbps, and transmission distance up to 120km on SM fiber. The transceiver consists of two sections: The transmitter section incorporates a laser driver and a 1550nm DFB laser. The receiver section consists of a APD photodiode integrated with a transimpedance preamplifier (TIA) and a Limiting Amplifier. The module is hot pluggable into the 20- pin connector. The high-speed electrical interface is base on low voltage logic, with nominal 100Ohms differential impedance and AC coupled in the module.

The optical output can be disabled by LVTTTL logic high-level input of TX_DIS. Transmit Fault (Tx_Fault) is provided to indicate that the module transmitter has detected a fault condition related to laser operation or safety. Loss of signal (RX_LOS) output is provided to indicate the loss of an input optical signal of receiver. A serial EEPROM in the transceiver allows the user to access transceiver monitoring and configuration data via the 2-wire SFP Management Interface. This interface uses a single address, A0h, with a memory map divided into a lower and upper area. Basic digital diagnostic (DD) data is held in the lower area while specific data is held in a series of tables in the high memory area.

FEATURES

- Up to 120km transmission on SMF
- Up to 1.25 Gbps
- 1550nm DFB laser and APD receiver
- 2-wire interface for integrated Digital Diagnostic monitoring
- Hot pluggable
- Very low EMI and excellent ESD protection
- +3.3V power supply
- Power consumption less than 1.0W
- Operating case temperature: 0~+70°C

APPLICATIONS

- High-speed storage area networks
- Computer cluster cross-connect
- Custom high-speed data pipes

COMPLIANCE

- Compliant with IEEE 802.3Z
- Compliant with MSA SFF-8472
- Compliant with SFP MSA

1250Mbps 1550nm Single-Mode 120km SFP Transceiver

BT-SFP-G120-1.25G

SPECIFICATION

Absolute Maximum Ratings

Parameter	Symbol	Min	Max	Unit	Notes
Storage Temperature	Ts	-40	+85	°C	
Supply Voltage	Vcc3	0	3.6	V	
Relative Humidity	RH	5	+85	%	Note1
Rx Input Average Power	Pmax	-	+1	dBm	

Notes: [1] Non-condensing state.

Recommended Operating Conditions

Parameter	Symbol	Min	Max	Unit	Notes
Operating Case Temperature	Tc	0	25	+70	°C
Power Supply Voltage	Vcc3	3.13	3.3	3.47	V
	Icc3	-	-	300	mA
Power Dissipation	Pd	-	-	1.0	W
Data Rate			1.25		Gbps

Transmitter Operating Characteristic-Optical, Electrical

Parameter	Symbol	Min	Typical	Max.	Unit	Note
Centre Wavelength	λ_C	1500	1550	1580	nm	
Spectral Width	$\Delta\lambda$			1	nm	DFB
Average Optical Power	Pavg	0	-	5	dBm	
Laser Off Power	Poff	-	-	-40	dBm	
Extinction Ratio	ER	8.2	-	-	dB	
Operating Data Rate		-	1.25	-	Gbps	
Optical Eye Mask	Complies with IEEE802.3z eye masks when filtered					
Tx Input Diff. Voltage	VI	500	-	2400	mV	
Tx Fault Output Voltage -- Low	VoL	-0.3	-	0.4	V	
Tx Fault Output Voltage -- High	VoH	2.4	-	Vcc+0.3	V	

1250Mbps 1550nm Single-Mode 120km SFP Transceiver

BT-SFP-G120-1.25G

Receiver Operating Characteristic-Optical, Electrical

Parameter	Symbol	Min	Max	Typ.	Unit	Notes
Centre Wavelength	λ_r	1260		1620	nm	
Receive Sensitivity In Average Power	Psen	-	-	-30	dBm	
Los Assert	LosA	-42	-		dBm	
Los Dessert	LosD	-	-	-30.5	dBm	
Los Hysteresis	LosH	0.5	-	-6	dB	
Overload	Pin	-	-	-10	dBm	
Rx Output Diff Voltage	Vo	370	-	2000	mV	
Operating Data Rate	-	-	1.25	-	Gbps	

Digital Diagnostic Functions

Parameter	Symbol	Min	Max	Unit	Notes
Temperature monitor absolute error	DMI_Temp	-3	3	°C	Over operating temp
Laser power monitor absolute error	DMI_TX	-3	3	dB	
RX power monitor absolute error	DMI_RX	-3	3	dB	
Supply voltage monitor absolute error	DMI_VCC	-3%	+3%	V	
Bias current monitor absolute error	DMI_Ibias	-10%	10%	mA	

Control and Status I/O Timing Characteristics

Parameter	Symbol	Min	Max	Unit	Notes
TX Disable Assert Time	t_off	-	100	μs	Note1
TX Disable Negate Time	t_on	-	2	ms	Note2
Time to initialize including reset of TX_Fault	t_init	-	300	ms	Note3
TX Fault Assert Tim	t_fault_on	-	1	ms	Note4
TX Fault Reset Time	t_reset	10	-	μs	Note5
LOS Assert Time	t_loss_on	-	100	μs	Note6
LOS Deassert Time	t_loss_off	-	100	μs	Note7

Notes:

- [1] Time from rising edge of TX Disable to when the optical output falls below 10% of nominal
- [2] Time from falling edge of TX Disable to when the modulated optical output rises above 90% of nominal
- [3] From power on or negation of TX Fault using TX Disable
- [4] Time from fault to TX fault on
- [5] Time from TX fault to TX nominal
- [6] Time from LOS state to RX LOS assert
- [7] Time from non-LOS state to RX LOS deassert.

1250Mbps 1550nm Single-Mode 120km SFP Transceiver

BT-SFP-G120-1.25G

PIN ASSIGNMENT

Control and Status I/O Timing Characteristics				
Pin	Logic	Symbol	Name/Description	Note
1		VeeT	Module Transmitter Ground	
2	LVTTL-O	TX_Fault	Module Transmitter Fault	
3	LVTTL-I	TX_Disable	Transmitter Disable; Turns off transmitter laser output	
4	LVTTL-I/O	SDA	2-wire Serial Interface Data Line (Same as MOD-DEF2 as defined in the INF-8074i)	
5	LVTTL-I/O	SCL	2-wire Serial Interface Clock (Same as MOD-DEF1 as defined in the INF-8074i)	
6		MOD_ABS	Module Absent, connected to VeeT or VeeR in the module	
7	LVTTL-I	RS0	Not used	
8	LVTTL-O	RX_LOS	Receiver Loss of Signal Indication (In FC designated as RX_LOS, in SONET designated as LOS, and in Ethernet designated at Signal Detect)	
9	LVTTL-I	RS1	Not used	
10		VeeR	Module Receiver Ground	
11		VeeR	Module Receiver Ground	
12	CML-O	RD-	Receiver Inverted Data Output	
13	CML-O	RD+	Receiver Non-Inverted Data Output	
14		VeeR	Module Receiver Ground	
15		VccR	Module Receiver 3.3 V Supply	
16		VccT	Module Transmitter 3.3 V Supply	
17		VeeT	Module Transmitter Ground	
18	CML-I	TD+	Transmitter Non-Inverted Data Input	
19	CML-I	TD-	Transmitter Inverted Data Input	
20		VeeT	Module Transmitter Ground	

PIN-OUT DEFINITION

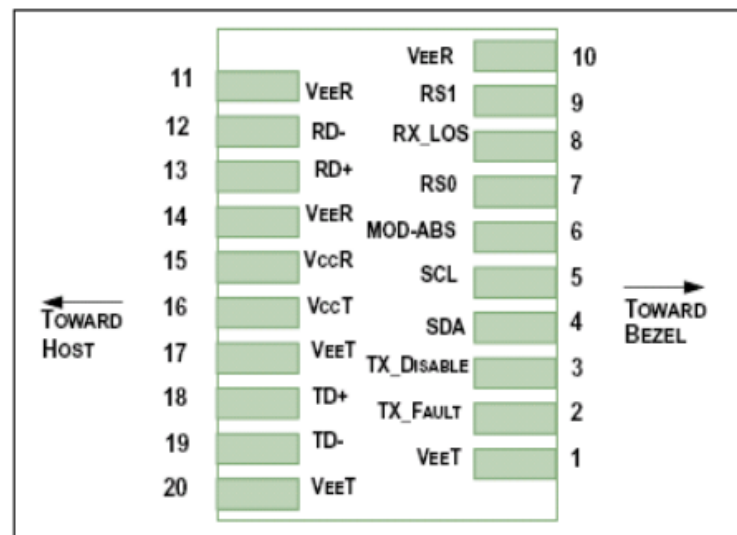


Figure1

DIMENSIONS

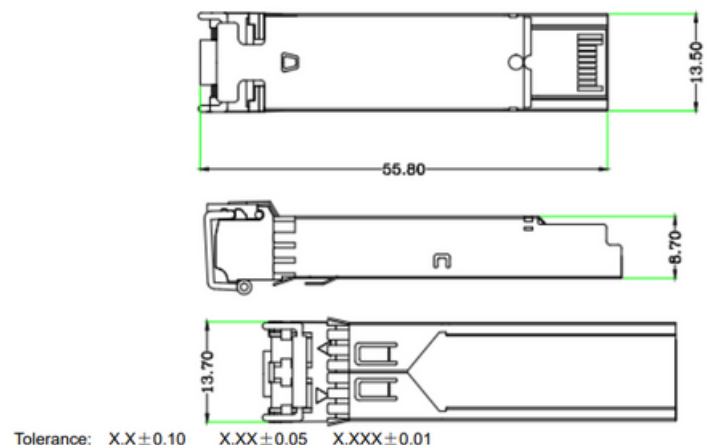


Figure4

unit:mm

1250Mbps 1550nm Single-Mode 120km SFP Transceiver

BT-SFP-G120-1.25G

BLOCK DIAGRAM OF TRANSCEIVER

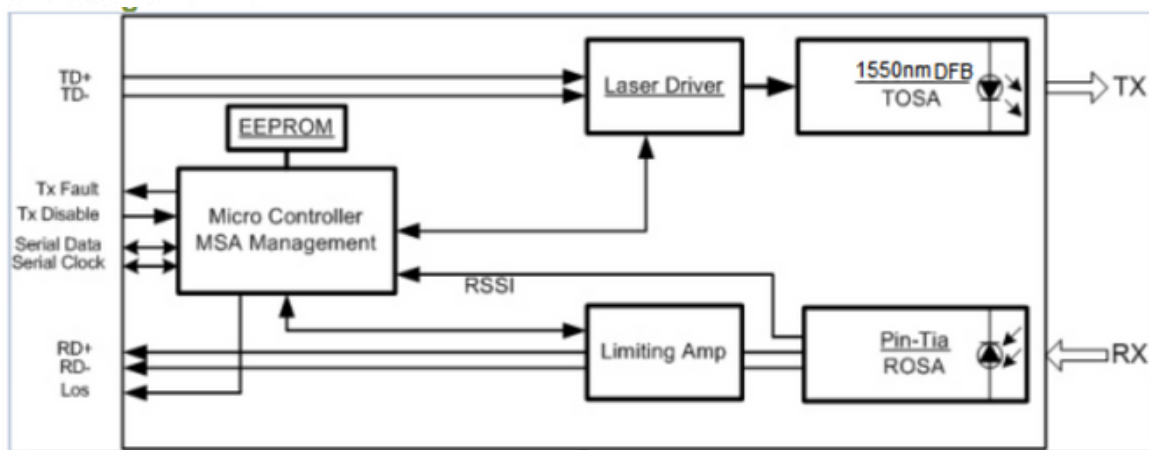


Figure2

TRANSMITTER SECTION

The transmitter converts 1.25Gbit/s serial PECL or CML electrical data into serial optical data compliant with the 1000BASE-ZX standard. An open collector compatible Transmit Disable (Tx_Dis) is provided. A logic "1," or no connection on this pin will disable the laser from transmitting. A logic "0" on this pin provides normal operation. The transmitter has an internal automatic power control loop (APC) to ensure constant optical power output across supply voltage and temperature variations. An open collector compatible Transmit Fault (Tx_Fault) is provided. TX_Fault is a module output contact that when high, indicates that the module transmitter has detected a fault condition related to laser operation or safety. The TX_Fault output contact is an open drain/collector and shall be pulled up to the Vcc_Host in the host with a resistor in the range 4.7-10 kΩ. TX_Disable is a module input contact. When TX_Disable is asserted high or left open, the SFP module transmitter output shall be turned off. This contact shall be pulled up to VccT with a 4.7 kΩ to 10 kΩ resistor

RECEIVER SECTION

The receiver converts 1.25Gbit/s serial optical data into serial PECL/CML electrical data. An open collector compatible Loss of Signal is provided. Rx_LOS when high indicates an optical signal level below that specified in the relevant standard. The Rx_LOS contact is an open drain/collector output and shall be pulled up to Vcc_Host in the host with a resistor in the range 4.7-10 kΩ, or with an active termination. Power supply filtering is recommended for both the transmitter and receiver. The Rx_LOS signal is intended as a preliminary indication to the system in which the SFP is installed that the received signal strength is below the specified range. Such an indication typically points to non-installed cables, broken cables, or a disabled, failing or a powered off transmitter at the far end of the cable.

1250Mbps 1550nm Single-Mode 120km SFP Transceiver

BT-SFP-G120-1.25G

RECOMMENDED INTERFACE CIRCUIT

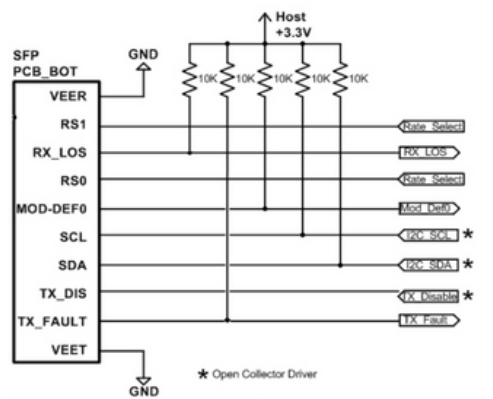
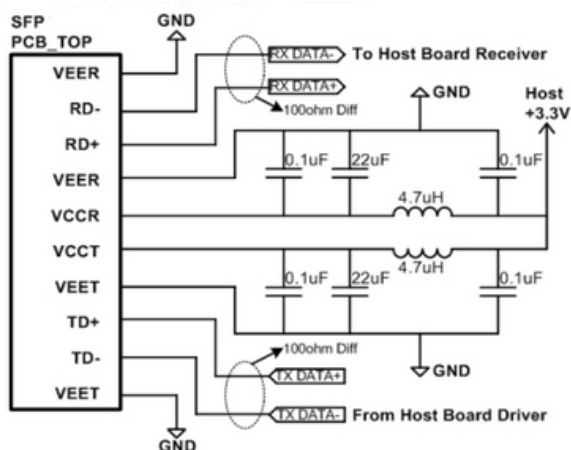


Figure3

DIGITAL DIAGNOSTIC MEMORY MAP

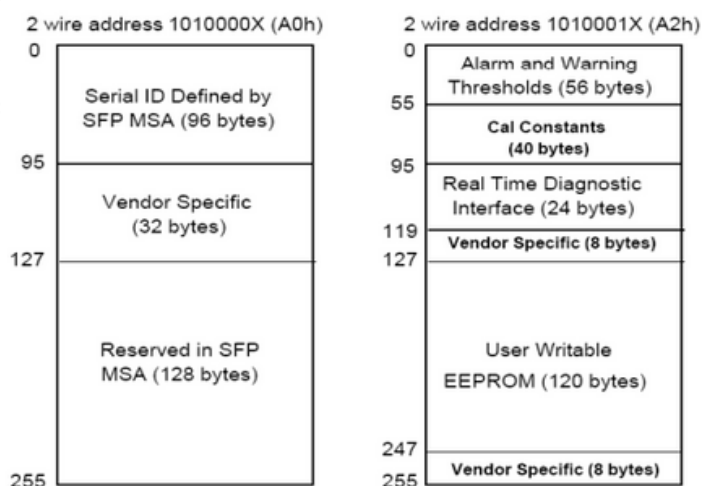


Figure5

NOTE

Performance figures, data and any illustrative material provided in this data sheet are typical and must be specifically confirmed in writing by BORN before they become applicable to any particular order or contract. In accordance with the BORN policy of continuous improvement specifications may change without notice. The publication of information in this data sheet does not imply freedom from patent or other protective rights of BORN or others. Further details are available from any BORN sales representative.



337 Forest Road,
London, United Kingdom

+44 7859 571344



info@bornelectronics.com



https://bornelectronics.com/