

# BT-321G1F-MM-2K

## 1Port Gigabit Media Converter



### Key Features:

- Complies with IEEE 802.3 10BASE-T, IEEE 802.3u 100BASE-TX, IEEE 802.3ab/z 1000BASE-T,
- TP port supports 10/100/1000BASE-T auto-negotiation and auto-MDI/MDI-X
- 1000BASE-T: 5e/6 UTP cable, up to 100 meters
- Wall Mountable design
- LED indicators for easy network diagnostics
- Compact in size, easy installation

### Introduction

This BT-321G1F-MM-2K gigabit media converter extends network distance with highly Gigabit performance via fiber optic cable. It provides media conversion between 10/100/1000BASE-T and 1000BASE-SX/LX interfaces. There are SC/SFP/WDM connectors with single-mode or multi-mode media for different distance solution as required. The Ethernet signal allows three types of segments to connect easily, efficiently and inexpensively. As this Gigabit Media Converter fully complies with IEEE 802.3 10BASE-T, IEEE 802.3u 100BASE-TX, IEEE 802.3ab 1000BASE-T and IEEE 802.3z 1000BASE-LX/SX, the Gigabit media conversion installation is quite quick and easy with its plug and play feature. The BT-321G1F-MM-2K also supports flow control and back pressure in half-duplex to eliminate packet loss.

The fiber port of the converter operates at 1310 /1550nm with SC connectors. Multi-mode models that support distances up to 550m and single-mode models that support distances up to 100km more are available which it can save more installation..

### Easy Installation

This BT-321G1F-MM-2K fiber converter allows two types of the segment to connect easily. It can be used as a standalone unit when powered by its DC adapter or used as a slide-in module to 14-slot media converter chassis. These media chassis can assist in producing the power for the converters to maintain the fiber-optic network at one location. As the Gigabit Media Converter fully complies with IEEE 802.3 10BASE-T, IEEE 802.3u 100BASE-TX, IEEE 802.3ab 1000BASE-T and IEEE 802.3z 1000BASE-LX/SX, the Gigabit media conversion installation is quite quick and easy with its plug and play feature. The fiber converter also supports flow control and back pressure in half-duplex mode to eliminate packet loss.

# BT-321G1F-MM-2K

## 1Port Gigabit Media Converter



### Technical Datasheet




<b>Model</b>	<b>BT-321G1F-MM-2K</b>	
<b>Hardware Specifications</b>		
Connector	1*10/100/1000BASE-T RJ45 auto MDI/MDIX ports 1*1000 Base-X SC	
Processing types	Store and forward	
LED Display	Power Indicator: PWR(green). Network Indicator: Link(green) Fiber: Green	
Thermal Fan	Fanless Design	
Network Standard	IEEE802.3i 10 BASE-T IEEE802.3u 100 BASE-TX IEEE802.3ab/z 1000 BASE-TX IEEE802.3x Flow Control IEEE802.3az EEE	
Jumbo Frame	9K	
Transmission model	IEEE802.3X full-duplex and Backpressure half-duplex	
Switch Performance	Backplane bandwidth	10Gbps
	Packet forwarding rate	2.98Mpps
	MAC address	4k

# BT-321G1F-MM-2K 1Port Gigabit Media Converter



Power requirement	DC 5V
ESD Protection	6KV ESD
Dimension (W x D x H)	70 x 90 x 26mm (2.76in*3.54in*1.02in)
Weight	<0.3kg
Environment	Operating temperature: -20°C~55°C, operating humidity: 5%~95% Storage temperature: -40°C~75°C, storage humidity: 5%~95%
Safety	FCC Part15 Class A,CE,RoHs


## Interfaces and Structure Diagrams

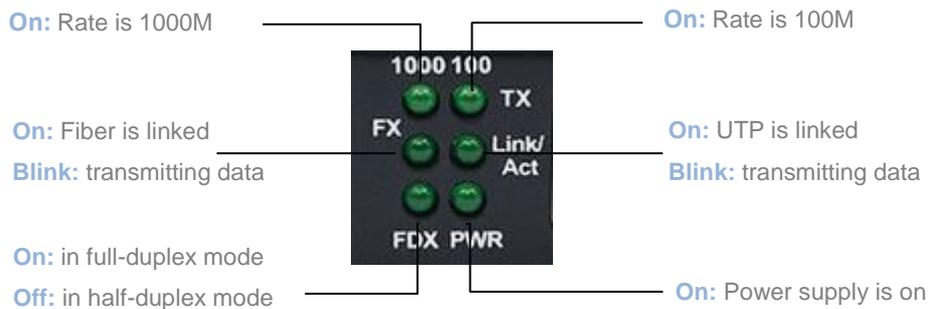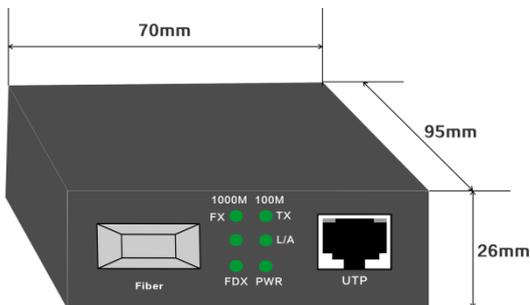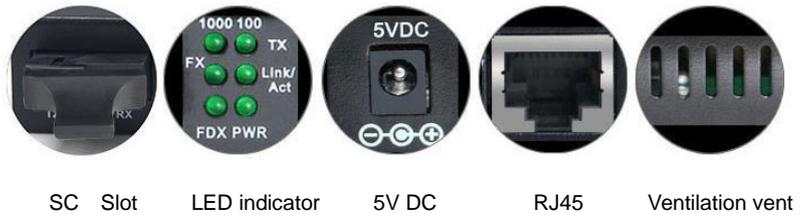

# BT-321G1F-MM-2K 1Port Gigabit Media Converter



## Applications

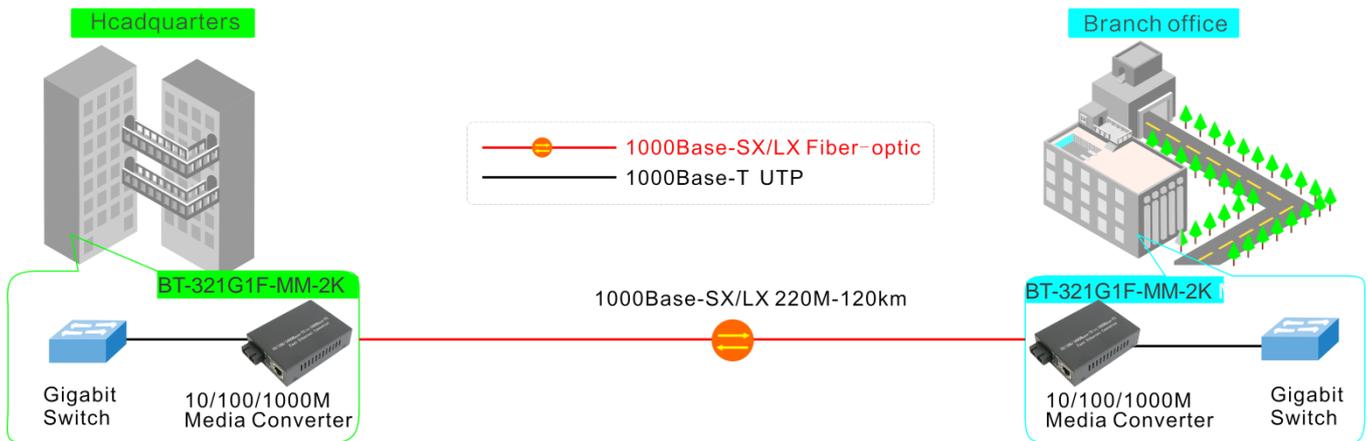

## Ordering Information

BT-321G1F-MM-2K	1ch 10/100/1000BASE-T to 1000BASE-X SC Fiber Converter, 20KM, Double fiber, 1310nm
-----------------	--



# 337 Forest Road,  
London, United Kingdom



+44 7859 571344



info@bornelectronics.com



https://bornelectronics.com/