

BI8216PGM2F

16Port PoE Gigabit Managed Industrial Switch




Key Features:

- Ports:** Provide 16*10/100/1000Mbps PoE ports with 2*1000Mbps SFP
- PoE Standard:** IEEE802.3af/at Power over Ethernet (PoE) Compliant
- Self-adaption:** RJ45 port supports 10/100/1000Mbps Auto MDI/MDIX
- Industrial Installation:** Din Rail mounting installation
- Wide Application:** Designed for Railway, traffic etc some Industrial environment
- Surge protection:** Protect the device from lightning surges and others electrical hazards
- Managed:** Support remote web managed,VLAN and storm control and IPV6 management etc.
- Working Temperature:** -40 to 85 degrees operating temperature
- Considerate Design:** IP40 Industrial design with dual power input

Environmentally Hardened Design

With the **IP40** metal industrial case which provides a high level of immunity against electromagnetic interference and heavy electrical surges,Being able to operate under the temperature range from **-40 to 85 degrees C**, the BI8216PGM2F can be placed in almost any difficult environment.

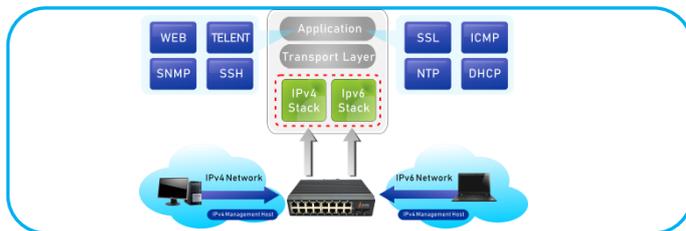


Cost-effective IPv6 Managed Gigabit PoE Switch Solution

With layer 2+ managed Gigabit PoE Switch, It provides IPv6/IPv4 management and built-in L2/L4 Gigabit Switching engine, and supports high-speed transmission of surveillance images and videos.

Surge Protection Design

provides contact discharge of $\pm 8KV$ DC and air discharge of $\pm 15KV$ DC for Ethernet ESD protection. It also supports $\pm 6KV$ surge immunity to improve product stability and protects users' networks from devastating ESD attacks, making sure the flow of operation does not fluctuate.

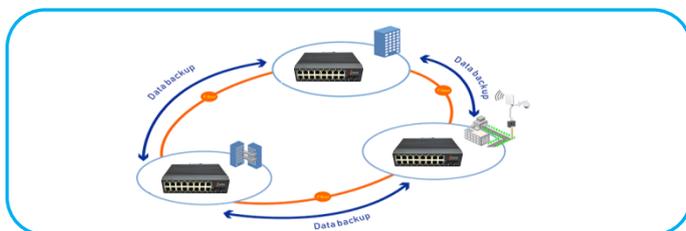

Comprehensive reliability mechanisms(ERPS)

Besides STP,RSTP, and MSTP, the BI8216PGM2F Managed PoE Switch supports enhanced Ethernet reliability technologies such as Ethernet Ring Protection Switching (ERPS), also referred to as G.8032. ERPS supports various services and allows flexible networking, helping customers build a network with lower OPEX and CAPEX.

BI8216PGM2F

16Port PoE Gigabit Managed Industrial Switch



Technical Datasheet

Model	BI8216PG2F	
Hardware Specifications		
Connector	16* 10/100/1000BASE-T RJ45 auto MDI/MDIX ports 2* 1000 Base-X SFP Slots 1 Console port	
PoE Port	16* 10/100/1000Mbps POE PSE port	
LED Display	Power Indicator: PWR(green).Network Indicator: Link(yellow) PoE Working Indicator: PoE(green)	
Thermal Fan	Fanless Design	
Installation	Din Rail	
Switch Architecture	Store and Forward	
Transmission model	IEEE802.3X full-duplex and Backpressure half-duplex	
Switch Performance	Backplane bandwidth	48Gbps
	Packet forwarding rate	27Mpps
	MAC address	8k
Power requirement	DC 44V~54V	
ESD Protection	6KV ESD	
Dimension(W×D×H)	50mm x110mm x 180mm(1.97in x 4.33in x 7.9in)	
Weight	<1.32kg	
Power over Ethernet (PoE) Specifications		
Network standard	IEEE802.3i 10 BASE-T	
	IEEE802.3u 100 BASE-TX	
	IEEE802.3ab 1000BASE-T	
	IEEE802.3x Flow Control	
	IEEE802.3af Power over Ethernet	
	IEEE802.3at Power over Ethernet	
	IEEE802.3az EEE	
PoE Standard	IEEE 802.3af Power over Ethernet/PSE	
	IEEE 802.3at Power over Ethernet Plus/PSE	
PoE Supply Type	1/2(+), 3/6(-) End-span	
PoE Power Output	Per Port 52V DC, 300mA. max. 15.4 watts (IEEE 802.3af)	
	Per Port 52V DC, 600mA. max. 30 watts (IEEE 802.3at)	
PoE Power budget	240W optional	

BI8216PGM2F

16Port PoE Gigabit Managed Industrial Switch



Layer 2 Functions	
Port Mirroring	TX / RX / both Many-to-1 monitor
Vlan	802.1Q tagged-based VLAN
	Up to 256 VLAN groups, out of 4094 VLAN IDs
	802.1ad Q-in-Q tunneling Voice VLAN;Protocol VLAN;Private VLAN (Protected port),GVRP
Link Aggregation	IEEE 802.3ad LACP and static trunk Supports 8 groups of 8-port trunk
Spanning Tree Protocol	STP, IEEE 802.1D Spanning Tree Protocol RSTP, IEEE 802.1w Rapid Spanning Tree Protocol MSTP, IEEE 802.1s Multiple Spanning Tree Protocol
Industrial Ring	G.8032 (ERPS),Recovery time less than 20ms 250 Ring at most, Max 1024 devices per ring
IGMP Snooping	IGMP (v2/v3) snooping
	IGMP querier Up to 256 multicast groups
MLD Snooping	MLD (v1/v2) snooping, up to 256 multicast groups
Access Control List	IPv4/IPv6 IP-based ACL / MAC-based ACL Open or close port
PoE Management	Standard POE scheduling management Power and current display Automatic restarting function of equipment dead machine Timing Support IP bindings restarting
QoS	8 mapping ID to 8 level priority queues
	--- Port number --- 802.1p priority --- 802.1Q VLAN tag --- DSCP field in IP packet
	Traffic classification based, strict priority and WRR
Security	IEEE 802.1X port-based authentication
	Built-in RADIUS client to co-operate with RADIUS server
	RADIUS / TACACS+ user access authentication
	IP-MAC port binding
	MAC filtering
	Static MAC address
	DHCP Snooping and DHCP Option82
	STP BPDU guard, BPDU filtering and BPDU forwarding
DoS attack prevention ARP inspection IP source guard	

BI8216PGM2F


16Port PoE Gigabit Managed Industrial Switch




Management Function	
Basic Management Interfaces	Web browser / Telnet / SNMP v1, v2c, V3 Firmware upgrade by HTTP / TFTP protocol through Ethernet network Remote / Local Syslog, System log, LLDP protocol, SNTF
Secure Management Interfaces	SSH, SSL, SNMP
SNMP MIBs	RFC 1213 MIB-II RFC 1215 Generic Traps RFC 1493 Bridge MIB RFC 2674 Bridge MIB Extensions RFC 2737 Entity MIB (Version 2) RFC 2819 RMON (1, 2, 3, 9) RFC 2863 Interface Group MIB RFC 3635 Ethernet-like MIB
Environment	
Safety	FCC Part15 Class A, CE, RoHs
Environment specification	Operating temperature: -40°C~85°C, operating humidity: 5%~95% Storage temperature: -40°C~85°C, storage humidity: 5%~95%

Installation Models

Power Terminal




- ◆ 4-pin 3.81mm-spacing plug-in terminal
- ◆ 48V-56VDC wide voltage input
- ◆ P1&P2 dual power input
- ◆ Reverse protection

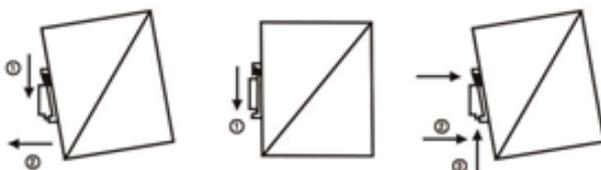

Din-Rail

Earth Protection

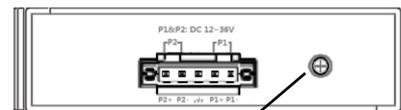


Ground terminal or screw

BI8216PGM2F


16Port PoE Gigabit Managed Industrial Switch



Mechanical Drawing

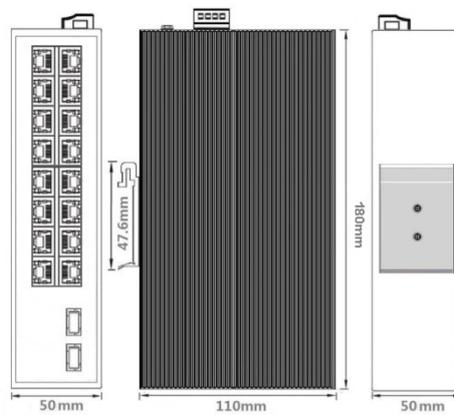

Applications

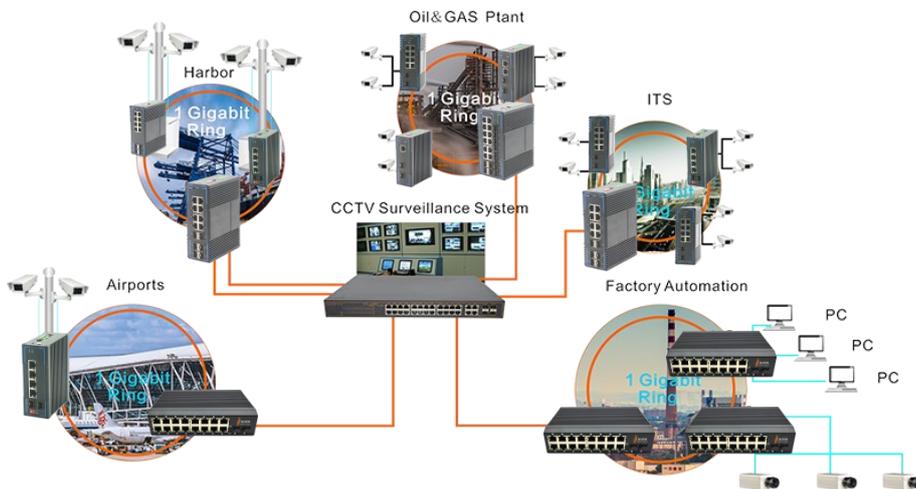

Ordering Information

BI8216PGM2F

16 Ports 10/100/1000Mbps Industrial Managed PoE switch With 2 SFP Uplink. Din rail, IEEE802.3af/at



337 Forest Road,
London, United Kingdom



+44 7859 571344



info@bornelectronics.com



https://bornelectronics.com/