



6-port Full Gigabit PoE Fiber Switch

BC2104PG2F-65W Series

Product Datasheet

6-port Full Gigabit PoE Fiber Switch

(BC2104PG2F-65W)



OVERVIEW

The BC2104PG2F-65W is a full gigabit PoE fiber switch. It has 4*10/100/1000M RJ45 ports and 2*1000M SFP slot ports. Port 1-4 can support IEEE 802.3af/at standard PoE power supply. Single port PoE power reaches 30W, and the maximum PoE output power is 65W. As a PoE power supply device, it can automatically detect and recognize the power receiving equipment that meets the standard and supply power through the network cable. It can supply power to POE terminal equipment such as wireless AP, webcam, VoIP, visual intelligent building intercom through network cable, and meet the network environment that needs high-density PoE power supply. It is suitable for hotel, campus, park, attraction, supermarket, factory quarter and small and medium-sized enterprises to form a cost-effective network.



6-port Full Gigabit PoE Fiber Switch

BC2104PG2F-65W Series

Unmanaged model, plug and play, no configuration, easy to use.

FEATURE

■ Full gigabit access, gigabit SFP port uplink

- ◇ All series supports "gigabit Ethernet port and gigabit SFP fiber port" combination, which enables users to flexibly build networking to meet the needs of various scenarios.
- ◇ Support non-blocking wire-speed forwarding.
- ◇ Support full-duplex based on IEEE802.3x and half-duplex based on backpressure.

■ Intelligent PoE power supply

- ◇ 4*10/100/1000Base-T RJ45 ports, meeting the needs of security monitoring, teleconferencing system, wireless coverage, and other scenarios.
- ◇ IEEE802.3af/at PoE standard, without damaging non-PoE devices.
- ◇ Priority system for PoE port, it will supply power to the high priority level port first when the power budget is insufficient and avoid overwork of the device.

■ Stable and reliable, easy to operate

- ◇ CCC, CE, FCC, RoHS.
- ◇ Plug and play, no configuration, simple and convenient.
- ◇ Low power consumption, no fan mute design, galvanized steel metal casing.
- ◇ Self-developed power supply, high redundancy design, providing a long term and stable PoE power output.
- ◇ The user-friendly panel, it can show the device status through the LED indicator of PWR, Link, PoE.



6-port Full Gigabit PoE Fiber Switch

BC2104PG2F-65W Series

TECHNICAL SPECIFICATION

Model	BC2104PG2F-65W
Interface Characteristics	
Fixed Port	4*10/100/1000Base-T PoE ports (Data /Power) 2*1000Base-X uplink SFP slot ports (Data)
Ethernet Port	Port 1-4 can support 10/100/1000Base-T,auto-sensing, full/half duplex MDI/MDI-X
Twisted Pair Transmission	10BASE-T: Cat3,4,5 UTP(≤100 meter) 100BASE-TX: Cat5 or later UTP(≤100 meter) 1000BASE-T: Cat5e or later UTP(≤100 meter)
SFP Slot Port	Gigabit SFP optical fiber port, default matching optical modules (optional order single-mode / multi-mode, single fiber / dual fiber optical module. LC)
Optical Cable	Multi-mode: 850nm 0 ~ 500M, Single mode: 1310nm 0 ~ 40KM, 1550nm 0 ~ 120KM.
Chip Parameter	
Network Protocol	IEEE802.3 10BASE-T, IEEE802.3i 10Base-T IEEE802.3u 100Base-TX, IEEE802.3ab 1000Base-T IEEE802.3z 1000Base-X, IEEE802.3x
Forwarding Mode	Store and Forward(Full Wire Speed)
Switching Capacity	12Gbps (Non-blocking)
Forwarding Rate@64byte	8.93Mpps
MAC	2K
Buffer Memory	2M



6-port Full Gigabit PoE Fiber Switch

BC2104PG2F-65W Series

Jumbo Frame	10K
LED Indicator	Power: PWR (green), network: Link(yellow), POE: PoE (green)
Reset Switch	Yes, One-button factory reset
PoE & Power	
PoE Port	Port 1 to 4 IEEE802.3af/at @ POE
Power Supply Pin	Default 1/2 (+), 3/6 (-), optional 4/5 (+), 7/8 (-)
Max Power Per Port	30W; IEEE802.3af/at
Total PWR / Input Voltage	65W/(DC52V)
Power Consumption	Standby<5W, Full load<65W
Power Supply	External power adapter, AC100~240V 50-60Hz 1.1A
Physical Parameter	
Operation TEMP / Humidity	-20~+55°C;5%~90% RH Non condensing
Storage TEMP / Humidity	-40~+75°C;5%~95% RH Non condensing
Dimension (L*W*H)	118*95*28mm
Net /Gross Weight	<0.35kg / <1.0kg
Installation	Desktop, wall-mounted
Certification & Warranty	
Lightning protection / protection level	Lightning protection: 4KV 8/20us; Protection level: IP30
Certification	CCC,CE mark, commercial, CE/LVD EN60950, FCC Part 15 Class B, RoHS



BORN
elegant creation


6-port Full Gigabit PoE Fiber Switch

BC2104PG2F-65W Series

Warranty

3 years, lifelong maintenance.

DIMENSION

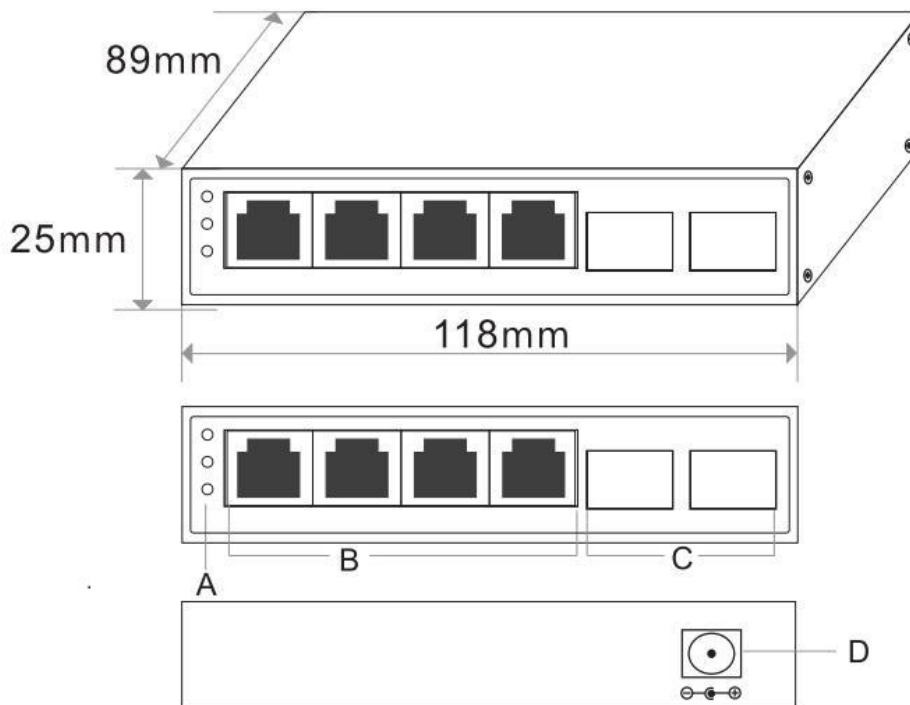

- A. Working indicator B. 4*10/100/1000M PoE ports
C. 2*1000M SFP ports D. DC power ports




BORN
elegant creation

6-port Full Gigabit PoE Fiber Switch

BC2104PG2F-65W Series

APPLICATION

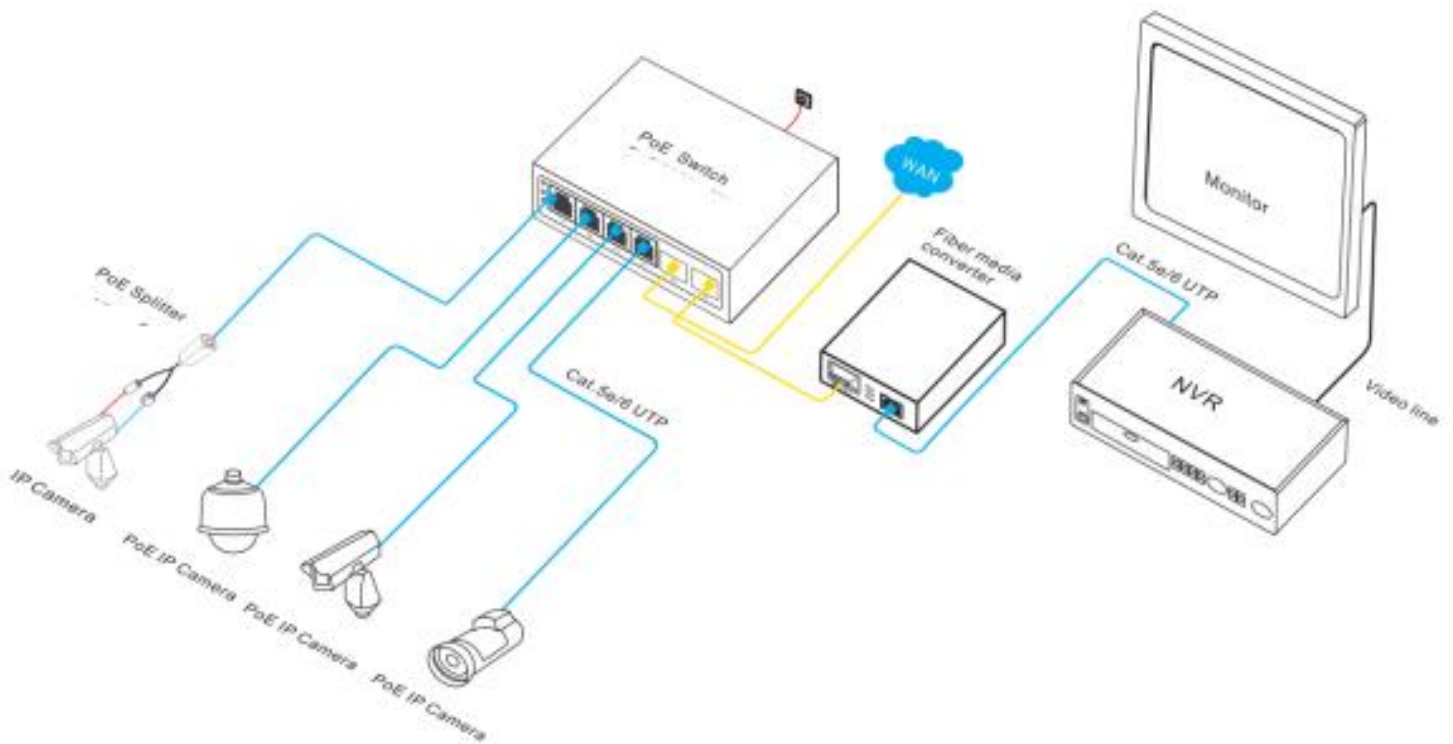



6-port Full Gigabit PoE Fiber Switch

BC2104PG2F-65W Series

PACKING LIST

PACKING LIST	CONTENT	QTY	UNIT
	6-port full gigabit PoE fiber switch	1	SET
	AC power cable+ power adapter	1	SET
	Mounting Kits (Hanging Ear)	1	SET
	User Guide	1	PC

BORN ELECTRONICS LIMITED

ADDRESS:

#337
Forest Road,
London
United Kingdom
Phone: +44 7859 571344
Email: info@bornelectronics.com

WARRANTY:

1 YEAR (EXPANDABLE UPTO 5 YEARS)

WEBSITE: <http://bornelectronics.com/>