

BC2116PG2F-250W Series 18-port Full Gigabit PoE Fiber Switch



Ideal for:



Telecom



Hotels & Resorts



Universities



Healthcare



Public Places



Airport



Transport



Industries

OVERVIEW

The BC2116PG2GF -250W is a full gigabit unmanaged PoE fiber switch. It has 16*10/100/1000M RJ45 ports and 2*1000M SFP slot ports. Port 1-16 can support IEEE802.3af/at standard PoE power supply. Single port PoE power reaches 30W, and the maximum PoE output power is 250W. As a PoE power supply device, it can automatically detect and recognize the power receiving equipment that meets the standard and supply power through the network cable.

It can supply power to POE terminal equipment such as wireless AP, webcam, VoIP, visual intelligent building intercom through network cable, and meet the network environment that needs high-density PoE power supply. It is suitable for hotel, campus, factory dormitory and small and medium-sized enterprises. Unmanaged model, plug and play, no configuration, easy to use.

FEATURES

1. Full gigabit access, gigabit SFP port uplink

- All series support "gigabit Ethernet port and gigabit SFP fiber port" combination, which enables users to flexibly build networking to meet the needs of various scenarios.
- Support non-blocking wire-speed forwarding.
- Support full-duplex based on IEEE802.3x and half-duplex based on backpressure.

2. Intelligent PoE power supply

- 16*10/100/1000Base-T RJ45 ports, meeting the needs of security monitoring, teleconferencing system, wireless coverage, and other scenarios.
- IEEE 802.3af/at PoE standard, without damaging non-PoE devices.
- Priority system for PoE port, it will supply power to the high priority level port first when the power budget is insufficient and avoid overwork of the device.

3. Stable and reliable

- CCC, CE, FCC, RoHS.
- Plug and play, no configuration, simple and convenient.
- Low power consumption, galvanized steel casing, The Fan active cooling.
- Self-developed power supply, high redundancy design, providing a long term and stable PoE power output.
- The user-friendly panel, it can show the device status through the LED indicator of PWR, Link, PoE.

BC2116PG2F-250W Series 18-port Full Gigabit PoE Fiber Switch



TECHNICAL SPECIFICATION

Model	BC2116G2F
Interface Characteristics	
Fixed Port	16*10/100/1000Base-T PoE ports (Data /Power) 2*1000Base-X uplink SFP ports (Data)
Ethernet Port	10/100/1000Base-T(X),Auto-sensing, Full/half duplex MDI/MDI-X self-adaption
Twisted Pair Transmission	10BASE-T: Cat3,4,5 UTP(≤100 meter) 100BASE-TX: Cat5 or later UTP(≤100 meter) 1000BASE-T: Cat5e or later UTP(≤100 meter)
SFP Slot Port	Gigabit SFP optical fiber interface, default matching optical modules (optional order single-mode / multi-mode, single fiber / dual fiber optical module. LC)
Optical Cable/ Distance	Multi-mode: 850nm /0 - 550M, single-mode: 1310nm/ 0 - 40KM, 1550nm /0- 120KM.
Chip Parameter	
Network Protocol	IEEE802.3 10BASE-T, IEEE802.3i 10Base-T IEEE802.3u 100Base-TX/FX, IEEE802.3ab 1000Base-TX IEEE802.3z 1000Base-X, IEEE802.3x
Forwarding Mode	Store and Forward (Full Wire Speed)
Switching Capacity	52Gbps
Forwarding Rate@64byte	26.78Mpps
MAC	8K
Buffer Memory	4M
Jumbo Frame	9.2K
LED Indicator	Power: PWR (green), network: link/Act (yellow), PoE: PoE (green), data: L/A (green)
Reset Switch	Yes, One-button factory reset
PoE & Power Supply	
PoE Port	Port 1 to 16 IEEE802.3af/at @ POE
Power Supply Pin	Default 1/2 (+), 3/6 (-)
Max Power Per Port	30W; IEEE802.3af/at
Total PWR / Input Voltage	250W (AC100-240V)
Power Consumption	Standby<15W;Full load<250W
Power Supply	Built-in power supply, AC 100~240V 50-60Hz 4.1A
Physical Parameter	
Operation TEMP / Humidity	-20~+55°C;5%~90% RH Non condensing
Storage TEMP / Humidity	-40~+75°C;5%~95% RH Non condensing
Dimension (L*W*H)	440*225*44mm
Net /Gross Weight	<3.0kg / <3.8kg
Installation	Desktop, 19 inch 1U cabinet


BC2116PG2F-250W Series 18-port Full Gigabit PoE Fiber Switch



Certification & Warranty

Lightning protection / Protection level	Lightning protection: 4KV 8/20us; Protection level: IP30
Certification	CCC;CE mark, commercial; CE/LVD EN60950;FCC Part 15 Class B; RoHS
Warranty	3 years, lifelong maintenance.

DIMENSION

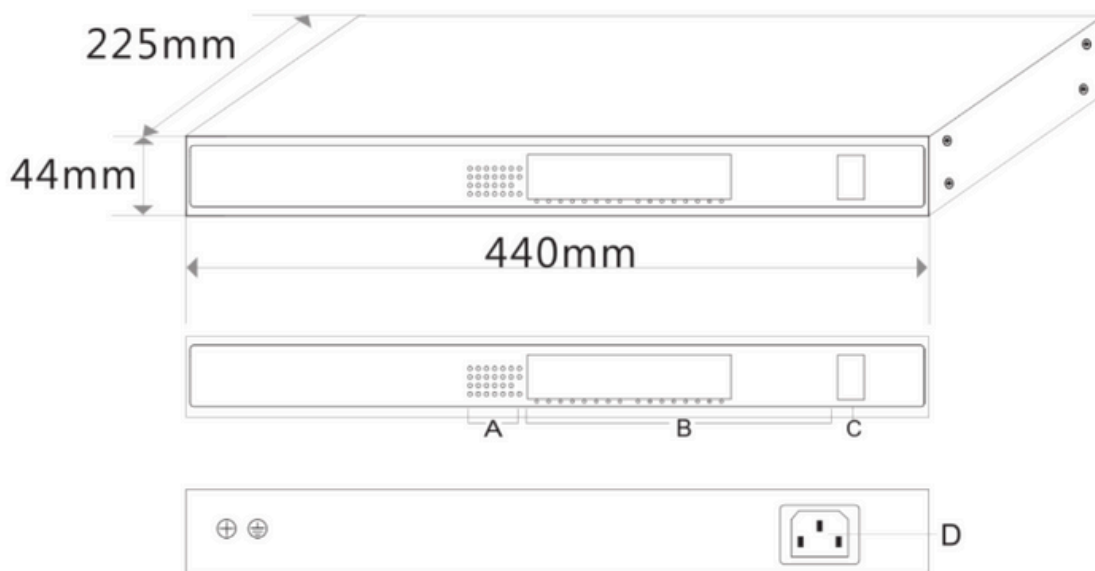


- A. Working Indicator
- B. 16*10/100/1000M PoE Ports
- C. 2*10/100/1000M SFP Ports
- D. Power Input Port AC100-240V,50/60Hz

BC2116PG2F-250W Series 18-port Full Gigabit PoE Fiber Switch



APPLICATION

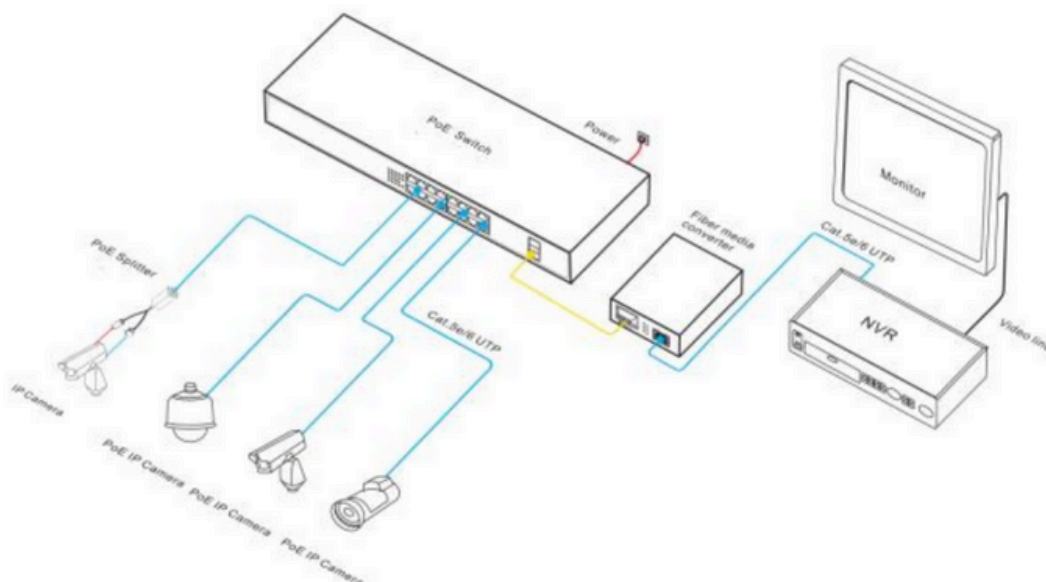

PACKING LIST

PACKING LIST	Content	Qty	Unit
	18-port full gigabit PoE fiber switch	1	SET
	AC Power Cable	1	PC
	Mounting Kits	1	SET
	User Guide	1	PC



337 Forest Road,
London, United Kingdom



+44 7859 571344



info@bornelectronics.com



<https://bornelectronics.com/>