

# BC2208PGM2F-150W

## 8Ports Gigabit Managed PoE Switch




### Key Features:

- Ports:** Provide 8\*10/100/1000Mbps PoE ports and 2\*1000Mbps SFP Uplink, 1 Console port
- PoE Standard:** IEEE802.3af/at Power over Ethernet (PoE) Compliant
- Total Power:** Total power budget of 150W and 30W for all single PoE ports
- Self-adaption:** RJ45 port supports 10/100/1000Mbps Auto MDI/MDIX
- Managed:** Support remote web managed, VLAN and storm control and IPV6 management etc.
- Wide Application:** Designed for Wifi AP and IP Security camera, VoIP etc
- Surge protection:** Protect the device from lightning surges and others electrical hazards
- Considerate Design:** Rack mount installation with fanless design
- Easy to use:** Plug and play, No configuration required

### Versatile PoE Port

Featuring 8\* 10/100/1000Mbps PoE ports which support IEEE802.3af/at standard and 2\* 1000Mbps SFP Uplink. This PoE switch provides Maximum power budget of 150W and 30W for single PoE ports sepectively, allowing users to have several different Networking products configured

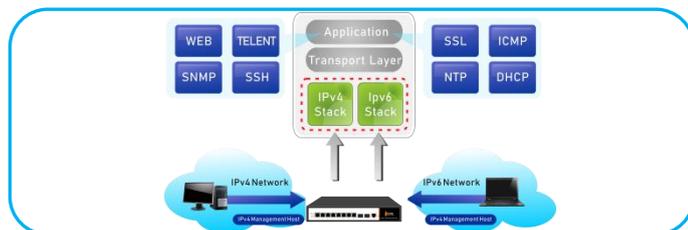

### Cost-effective IPv6 Managed Gigabit PoE Switch Solution

With layer 2+ managed Gigabit PoE Switch, It provides IPv6/IPv4 management and built-in L2/L4 Gigabit Switching engine, and supports high-speed transmission of surveillance images and videos.

### Surge Protection Design

Reaching 6KV surge protection, the PoE ports owns the capacity to keep the PoE Switch from lightning strikes and other electrical surges, offering more reliable performance even in some harsh environments.



### 2 Gigabit SFP Uplink Port

With 2 SFP module slot available, the SFP uplink port is ideal for connecting the switch to the network's backbone, providing more than enough bandwidth and stability for ultra high speed data transferring, Beside the SFP can transmittte the date with Max 100Km distance with more economic solution

# BC2208PGM2F-150W

## 8Ports Gigabit Managed PoE Switch



### Technical Datasheet

<b>Model</b>	<b>BC2208PGM2F-150W</b>
<b>Hardware Specifications</b>	
Connector	8*10/100/1000BASE-T RJ45 auto MDI/MDIX ports 2*1000 Base-X SFP Slots    1 Console port
CPU	500M Hz
DRAM	4Gb DDR3
Flash Memory	128Mbits
Buffer Memory	8Mbits
PoE Port	8*10/100/1000Mbps POE PSE port
SFP	Singe fiber/Dual fiber supported. Distance vary the module
Thermal Fan	Fanless Design
LED indicators	Power Indicator: PWR(green). Network Indicator: Link(yellow) PoE Working Indicator: PoE(green)
Switch Architecture	Store and Forward
Transmission model	IEEE802.3X full-duplex and Backpressure half-duplex
Switch Performance	Backplane bandwidth: 32Gbps Packet forwarding rate: 14.88Mpps MAC address: 8K
Power requirement	AC100-240V 50/60Hz
ESD Protection	6KV ESD
Dimension(WxDxH)	310mm x 180mm x 44.5mm(12.2in x 7.09in x 1.75in)
Weight	1.4kg
<b>Power over Ethernet (PoE) Specifications</b>	

Network standard	IEEE802.3i 10 BASE-T
	IEEE802.3u 100 BASE-TX
	IEEE802.3ab 1000BASE-T
	IEEE802.3x Flow Control
	IEEE802.3af Power over Ethernet
	IEEE802.3at Power over Ethernet
	IEEE802.3az EEE

# BC2208PGM2F-150W

## 8Ports Gigabit Managed PoE Switch



PoE Standard	IEEE 802.3af Power over Ethernet/PSE IEEE 802.3at Power over Ethernet Plus/PSE
PoE Supply Type	1/2(+), 3/6(-) End-span
PoE Power Output	Per Port 52V DC, 300mA. max. 15.4 watts (IEEE 802.3af) Per Port 52V DC, 600mA. max. 30 watts (IEEE 802.3at)
PoE Power budget	150W
<b>Layer 2 Functions</b>	
Port Mirroring	TX / RX / both Many-to-1 monitor
Vlan	802.1Q tagged-based VLAN Up to 256 VLAN groups, out of 4094 VLAN IDs 802.1ad Q-in-Q tunneling Voice VLAN;Protocol VLAN;Private VLAN (Protected port),GVRP
Link Aggregation	IEEE 802.3ad LACP and static trunk Supports 8 groups of 8-port trunk
Spanning Tree Protocol	STP, IEEE 802.1D Spanning Tree Protocol RSTP, IEEE 802.1w Rapid Spanning Tree Protocol MSTP, IEEE 802.1s Multiple Spanning Tree Protocol
IGMP Snooping	IGMP (v2/v3) snooping IGMP querier Up to 256 multicast groups
MLD Snooping	MLD (v1/v2) snooping, up to 256 multicast groups
Access Control List	IPv4/IPv6 IP-based ACL / MAC-based ACL
PoE Management	Open or close port Standard POE scheduling management Power and current display Automatic restarting function of equipment dead machine Timing Support IP bindings restarting 8 mapping ID to 8 level priority queues
QoS	--- Port number --- 802.1p priority --- 802.1Q VLAN tag --- DSCP field in IP packet Traffic classification based, strict priority and WRR

# BC2208PGM2F-150W

## 8Ports Gigabit Managed PoE Switch



Security	<ul style="list-style-type: none"> <li>IEEE 802.1X port-based authentication</li> <li>Built-in RADIUS client to co-operate with RADIUS server</li> <li>RADIUS / TACACS+ user access authentication</li> <li>IP-MAC port binding</li> <li>MAC filtering</li> <li>Static MAC address</li> <li>DHCP Snooping and DHCP Option82</li> <li>STP BPDU guard, BPDU filtering and BPDU forwarding</li> <li>DoS attack prevention</li> <li>ARP inspection</li> <li>IP source guard</li> </ul>
----------	--

### Management Function

Basic Management Interfaces	<ul style="list-style-type: none"> <li>Web browser / Telnet / SNMP v1, v2c, V3</li> <li>Firmware upgrade by HTTP / TFTP protocol through Ethernet network</li> <li>Remote / Local Syslog, System log, LLDP protocol, SNMP</li> </ul>
-----------------------------	--

Secure Management Interfaces	SSH, SSL, SNMP
------------------------------	----------------


SNMP MIBs	<ul style="list-style-type: none"> <li>RFC 1213 MIB-II; RFC 1215 Generic Traps</li> <li>RFC 1493 Bridge MIB; RFC 2674 Bridge MIB Extensions</li> <li>RFC 2737 Entity MIB (Version 2); RFC 2819 RMON (1, 2, 3, 9)</li> <li>RFC 2863 Interface Group MIB; RFC 3635 Ethernet-like MIB</li> </ul>
-----------	---

### Environment

Safety	FCC Part15 Class A, CE, RoHS
--------	------------------------------

Environment specification	<ul style="list-style-type: none"> <li>Operating temperature: -20°C~55°C, operating humidity: 5%~95%</li> <li>Storage temperature: -40°C~75°C, storage humidity: 5%~95%</li> </ul>
---------------------------	--

### Interfaces

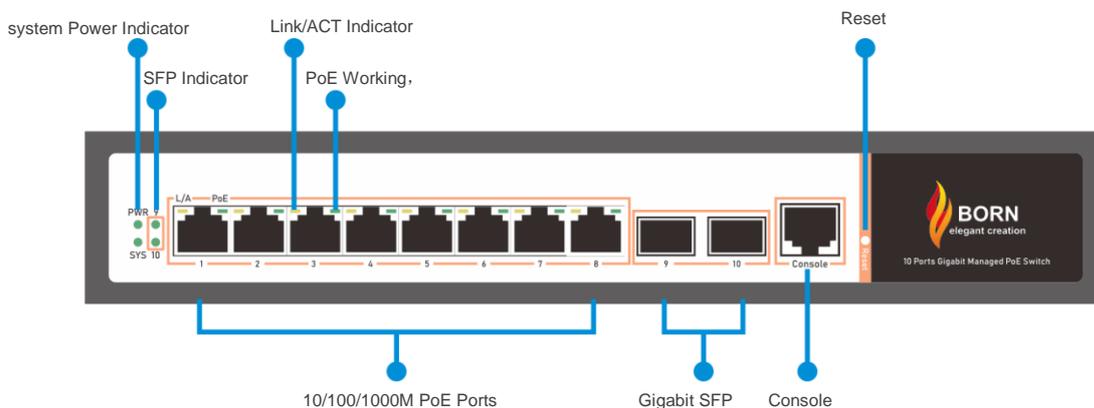


# BC2208PGM2F-150W


## 8Ports Gigabit Managed PoE Switch



### Structure Diagrams

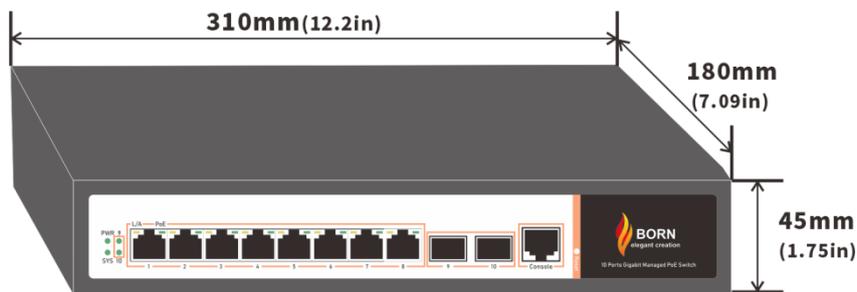

### Applications

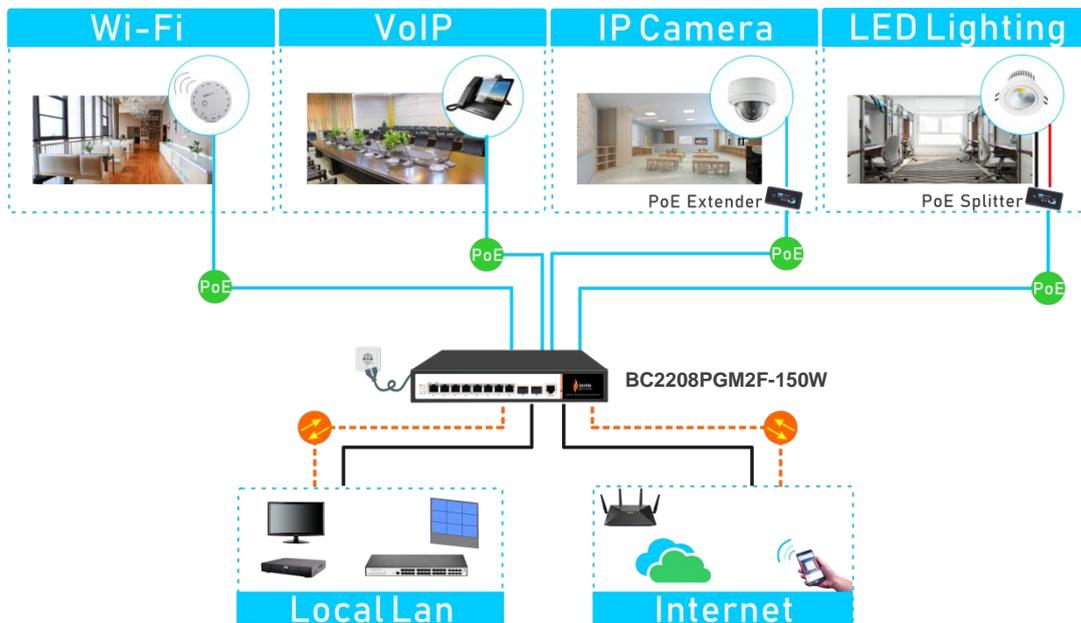

#### Ordering Information

BC2208PGM2F-150W

8 Ports 10/100/1000Mbps managed PoE switch with 2 Gigabit SFP Uplink and 1 Console port, 6KV surge protection, IEEE802.3af/at



# 337 Forest Road,  
London, United Kingdom



+44 7859 571344



info@bornelectronics.com



https://bornelectronics.com/