

BC3024PGM4F-370W Series 29 Ports L3 managed POE switch



Ideal for:



Telecom



Hotels & Resorts



Universities



Healthcare



Public Places



Airport



Transport



Industries

OVERVIEW

BC3024PGM4F-370W is managed PoE switch for security transmission and WIFI coverage, meet the WIFI AP, IP-camera, WIFI bridge, IP phones and other types of equipment PoE power supply needs. Products using a new generation of high-performance hardware and software platforms, providing flexible, cost-effective full Gigabit access and uplink ports, support for Layer 3 routing protocols, complete security mechanisms, improved ACL / QoS strategy and rich VLAN capabilities, it is easy to manage and maintain, meet the users' requirements for network equipment easy to manage, high security and low cost. It is suitable for network access, aggregation and core applications in campus, hotel and enterprise campus.

FEATURES

- 1-8 port support 250Meters long-distance power supply (recommended cat5e or 6 network cable)
- Support a key VLAN, the port 1-24 isolated from each other, which can effectively inhibit network storms, improve network performance
- Supports IEEE 802.3af / at standard, automatically detects and identifies devices that comply with the IEEE 802.3af / at standard and supply power to it
- Support Auto MDI/MDIX;
- Adopt store-and-forward exchange method
- Intelligent power supply, the lowest power consumption, ensure PD power needs
- With power circuit protection, protect the safety of PD
- No configuration characteristics of the power supply is automatically supplied to the adaptive equipment;
- Fanless design, energy saving and environmental protection; no noise, reduce the impact on the environment
- Small, exquisite design
- Support port without link power saving function
- All ports have wire-speed forwarding capability
- Plug and play, easy to use

BC3024PGM4F-370W

Series

29 Ports L3 managed POE switch



SPECIFICATIONS

HARDWARE

Parameter	Specifications
Network standard	IEEE 802.3: Ethernet Media Access Control (MAC) protocol IEEE 802.3i:10BASE-T Ethernet IEEE 802.3u:100BASE-TX fast Ethernet IEEE 802.3ab:1000BASE-T gigabit Ethernet IEEE 802.3z:1000BASE-X gigabit Ethernet(fiber) IEEE 802.3ae:10GBASE-SR/LR 10G Ethernet(fiber) IEEE 802.3ad: comply link aggregation standard IEEE 802.3x: flow control IEEE 802.1p: About the traffic priority of the second layer of Qos / Cos protocol (multicast filtering) IEEE 802.1q:VLAN Bridge operation IEEE 802.1d:STP spanning tree IEEE 802.1s:MSTP spanning tree IEEE 802.1w:RSTP spanning tree IEEE 802.3af IEEE 802.3at
Port	24 10/100/1000Mbps RJ45 port 4 gigabit SFP fiber port 1 Console port
PoE	24 10/100/1000Mbps RJ45 port support PoE Max 370W Single port max 30W
LEDs	28 Link/Act LEDs 24 POE LEDs 1 Power LEDs
Performance	Forwarding mode: store and forward Switch Volume (Full-duplex) :56Gbps Packet forwarding rate:41.664Mpps 8K MAC address table
Input	100-240V/50-60Hz
Dimension (L×W×H)	440mm×320mm×44mm

BC3024PGM4F-370W

Series

29 Ports L3 managed POE switch



SOFTWARE


Shortcut function	One key VLAN
	One key CCTV(1-8 port 250meters PoE distance)
	One key QoS (Video priority)
	One key AI power supply
Routing	Support RIP V1/V2 dynamic routing
	Support static routing
DHCP	Support DHCP server
	Support DHCP reply
	Support DHCP Snooping
VLAN	Support 4K VLAN
	Support 802.1Q VLAN、Port VLAN、Voice VLAN
PoE	Support setting the PoE port priority
	Support setting PoE power supply period
	Support setting port power
MAC address table	Support MAC address learning and aging automatically
	Support MAC address learning and aging automatically
	Support static, dynamic, filter address table
Safety	Based on user rating management and password protection
	Support based on the port number, IP address, MAC address restrictions on user access
	Icmp-echo、DoS protection
	Support DHCP Snooping、DHCP attack protection
	Support port security, port isolation
Access control (ACL)	Support L2(Layer 2)~L4(Layer 4) packet filtering function
	Support port mirroring, port redirection, flow rate limit, QoS re-marking
Multicast	Support IGMP v1/v2 Snooping
	Support static multicast
	Support multicast VLAN
QoS	Support 8 port queue
	Support port priority, 802.1p priority, DSCP priority
	Support SP、RR、WRR、WFQ Priority scheduling algorithm
Spanning Tree	Support STP(IEEE 802.1d),RSTP(IEEE 802.1w) and MSTP(IEEE 802.1s) protocol
	Support loop protection, BPDU protection

BC3024PGM4F-370W Series 29 Ports L3 managed POE switch



Management & Maintenance	Support WEB management(HTTP)
	Support CLI(Telnet、local serial port)
	Support SNMP V1/V2/V3,Compatible with public MIBS
	Support LLDP、RMON
	Support IP Source protection, DoS protection
	Support CPU monitor、memory monitoring
	Support system log
	Support cable testing

APPLICATION

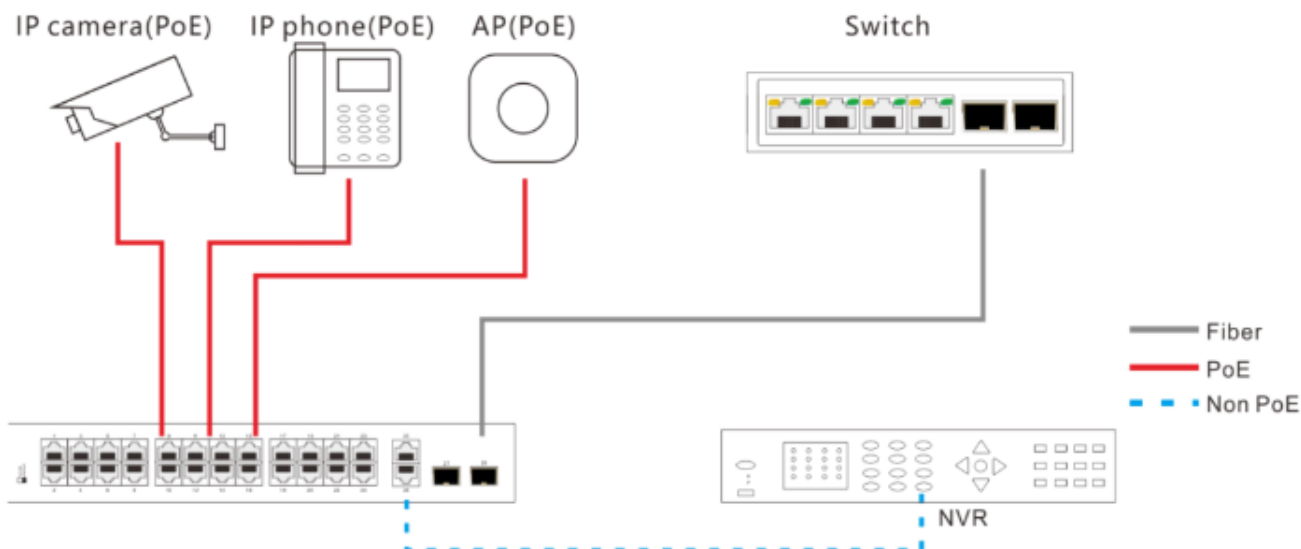


BC3024PGM4F-370W

Series

29 Ports L3 managed POE switch



DIMENSIONS

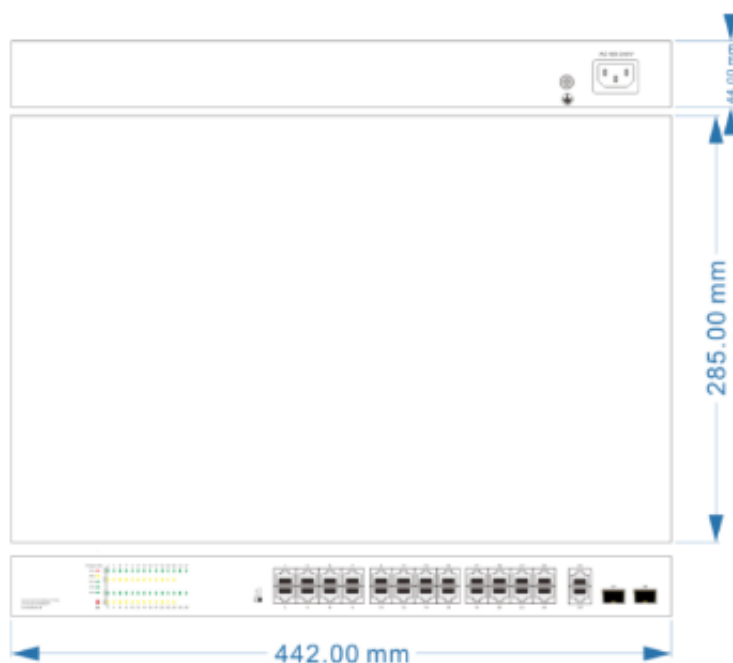

ORDER INFORMATION

Model	Description
BC3024PGM4F-370 W series	29-port L3 Managed Gigabit POE Switch, 24 Outputs 10/100/1000Mbps RJ45 poe port, 4x Gigabit SFP+ fiber port, 1Console port, 370 watts



337 Forest Road,
London, United Kingdom

+44 7859 571344



info@bornelectronics.com



<https://bornelectronics.com/>