

# BIQE0316-SPL(2) Outdoor Box



## Ideal for:



Telecom



Hotels & Resorts



Universities



Healthcare



Public Places



Airport



Transport



Industries

## OVERVIEW


It is an outdoor box, which integrates residual current device, AC socket, surge protector, PS module fiber tray, etc. It has IP66 protection level, can be for outdoor using.

It can be applied for surveillance monitoring, forest monitoring, etc

## FEATURES

- ❖ Provide 1 channel AC220V power input, 2 channels of AC power output
- ❖ Built in fiber tray(can support customer install 12 Duplex Single-mode LC Connector), residual current device(Brand TGBGLE-32 RCD 2P C10 30mA), Din-rail, grounding array,surge protector, triangle lock,etc
- ❖ The box adopts waterproof (protection level IP66), anti-rust treatment, suitable for long time outdoor use

## PICTURE

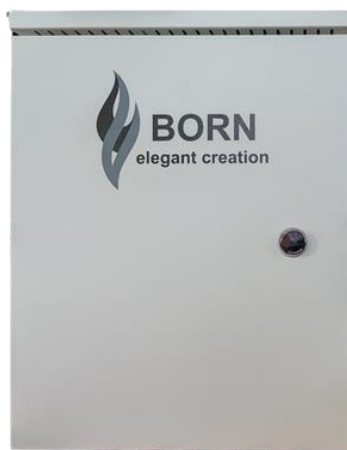

# BIQE0316-SPL(2) Outdoor Box




## FEATURES

ITEM	SPECIFICATION
Power input	AC 100~240V, 50/60Hz, 10A
AC output	AC output 2 channel
Fiber tray	can support customer install 12 Duplex Single-mode LC connector
Fan	ball-bearing fan AC220V 15KG
Working temperature	-20°C~70°C
Storage temperature	-40°C~85°C
Humidity	0~95%(No condensation)
Dimension(H×W×D)	500mm×500mm×500mm
Material	Metal
Color	RAL 9010
Net-weight	15KG


# BIQE0316-SPL(2) Outdoor Box



## SIZE

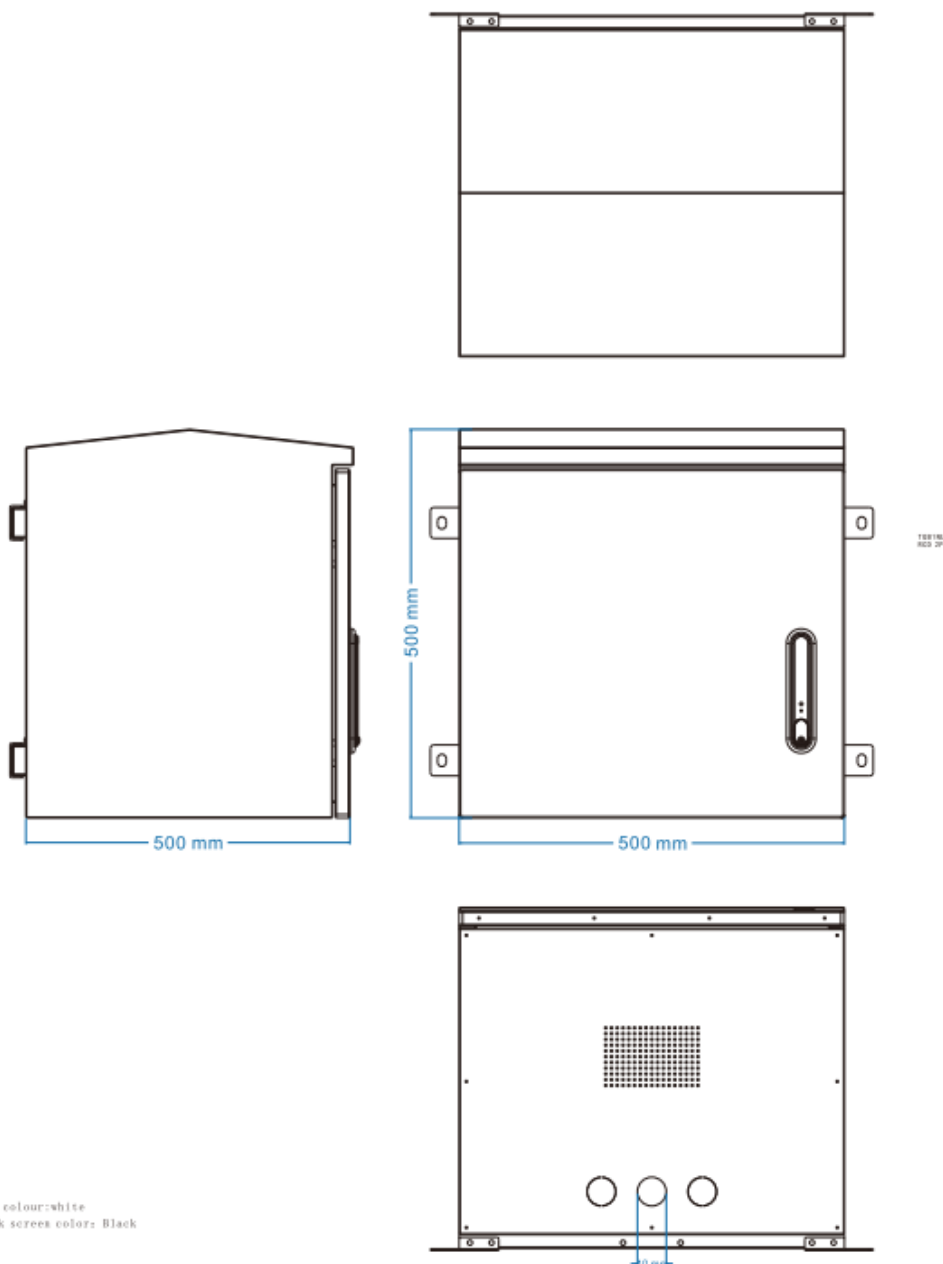

# BIQE0316-SPL(2) Outdoor Box

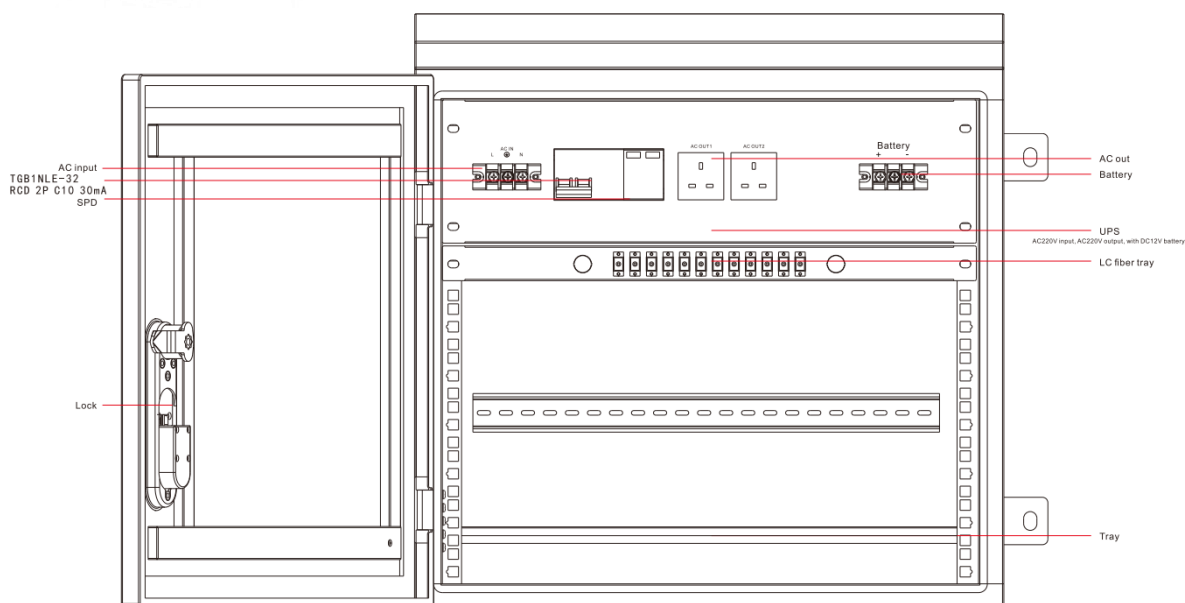

## ORDERING INFORMATION

Version	Describe
BIQE0316-SPL(2)	Outdoor box;  AC 100~240V, 50/60Hz, 10A IN;  Din-rail, AC socket, waterproof IP66 and grounding array,etc



# 337 Forest Road,  
London, United Kingdom



+44 7859 571344



info@bornelectronics.com



<https://bornelectronics.com/>