



6-port Full Gigabit Managed POE Switch

BC3104PGM2F-65W Series

Product Datasheet

6-port Full Gigabit Managed PoE Switch

BC3104PGM2F-65W



OVERVIEW

The BC3104PGM2F-65W is a full gigabit managed PoE fiber switch. It has 4*10/100/1000Base-T RJ45 ports and 2*100/1000Base-X SFP fiber slot ports. Port 1-4 can support IEEE802.3af/at standard PoE. Single port PoE power reaches 30W, and the maximum PoE output power is 65W. As a PoE power supply device, it can automatically detect and recognize the power receiving equipment that meets the standard and supply power through the network cable. It can supply power to POE terminal equipment such as wireless AP, webcam, VoIP phone, building visual access control intercom, etc. through a network cable to meet the network environment that needs high-density PoE power supply. It is suitable for hotels, campuses, parks, shopping malls, scenic spots, hospitals, factory dormitory and small and medium-sized enterprise.



6-port Full Gigabit Managed POE Switch

BC3104PGM2F-65W Series

The BC3104PGM2F-65W has L2+ full network management function, supports IPV4 management, static route full line rate forwarding, security protection mechanism, complete ACL/QoS policy and rich VLAN functions, and is easy to manage and maintain. Supports multiple network redundancy protocols STP/RSTP/MSTP (<50ms) to improve link backup and network reliability. When one-way network fails, communication can be quickly restored to ensure important uninterrupted communication for applications. According to the actual application requirements, you can configure multiple application services such as PoE power management, port traffic control, VLAN division, and SNMP through the Web network management mode.

FEATURE

■ Gigabit access, gigabit SFP port uplink

- ◇ Support 10/100/1000M RJ45 port and Gigabit SFP port combination, which enables users to flexibly build networking to meet the needs of various scenarios.
- ◇ Support non-blocking wire-speed forwarding.
- ◇ Support full-duplex based on IEEE802.3x and half-duplex based on backpressure.

■ Intelligent PoE power supply

- ◇ 4*10/100/1000Base-T RJ45 ports, meeting the needs of security monitoring, teleconferencing system, wireless coverage, and other scenarios.
- ◇ IEEE802.3af/at PoE standard, without damaging non-PoE devices.
- ◇ Priority system for PoE port, it will supply power to the high priority level port first when the power budget is insufficient and avoid overwork of the device.
- ◇ PoE network management, realize PoE port power allocation, priority setting, port power status viewing, time scheduling, etc.

■ Strong business processing capability

- ◇ IEEE802.1Q VLAN, flexible VLAN division and QinQ configuration.
- ◇ QoS, Priority mode based on 802.1P, Port & DSCP, queue scheduling algorithm including Equ, SP, WRR &



6-port Full Gigabit Managed POE Switch

BC3104PGM2F-65W Series

SP+WRR.

- ◇ ALC, filter data packet through configuring matching rules, processing operation & time permission, and provide flexible and safe access control.
- ◇ IGMP V1/V2 and IGMP Snooping.
- ◇ STP/RSTP/MSTP.
- ◇ Static and dynamic aggregation.

■ Security

- ◇ 802.1X authentication.
- ◇ Port isolation, Storm control.
- ◇ IP-MAC-VLAN-Port binding.

■ Stable and reliable

- ◇ Low power consumption, galvanized steel casing, No fan.
- ◇ Self-developed power supply, high redundancy design, providing a long term and stable PoE power output.
- ◇ CCC, CE, FCC, RoHS.
- ◇ The user-friendly panel, it can show the device status through the LED indicator of PWR, Link, PoE.

■ Easy operation and maintenance management

- ◇ Web management, CLI command line (Console, Telnet), SNMP (V1/V2/V3).
- ◇ HTTPS, SSLV3, and SSHV1/V2.
- ◇ RMON, system log, LLDP, and port traffic statistics.
- ◇ CPU monitoring, memory monitoring, Ping test, and cable diagnose.



6-port Full Gigabit Managed POE Switch

BC3104PGM2F-65W Series

TECHNICAL SPECIFICATION

Model	BC3104PGM2F-65W
Interface Characteristics	
Fixed Port	4*10/100/1000Base-T POE ports (Data /Power) 2*100/1000Base-X SFP ports (Data) 1*Console RS232 port
Ethernet Port	Port1-4 can support 10/100/1000Base-T(X) auto-sensing, Full/half duplex MDI/MDI-X self-adaption
Twisted Pair Transmission	10BASE-T: Cat3,4,5 UTP(≤100 meter) 100BASE-TX: Cat5 or later UTP(≤100 meter) 1000BASE-T: Cat5e or later UTP(≤100 meter)
SFP Slot Port	Gigabit SFP optical fiber interface, default matching optical modules (optional order single-mode / multi-mode, single fiber / dual fiber optical module. LC)
Optical Cable/ Distance	Multi-mode: 850nm 0 ~ 550M, Single mode: 1310nm 0 ~ 40KM, 1550nm 0 ~ 120KM.
Chip Parameter	
Network Management Type	L2+
Network Protocol	IEEE802.3 10BASE-T, IEEE802.3i 10Base-T, IEEE802.3u 100Base-TX IEEE802.3ab 1000Base-T, IEEE802.3z 1000Base-X, IEEE802.3x
Forwarding Mode	Store and Forward(Full Wire Speed)
Switching Capacity	64Gbps (Non-blocking)
Forwarding	8.93Mpps



6-port Full Gigabit Managed POE Switch

BC3104PGM2F-65W Series

Rate@64byte	
MAC	8K
Buffer Memory	4.1M
Jumbo Frame	10K
CPU(Hz)	500M
DRAM	1G
Flash	128M
LED Indicator	Power: PWR (green), network : Link (yellow), fiber port: L/A (green), PoE: PoE (green)
Reset Switch	Yes, One-button factory reset
PoE & Power Supply	
PoE Port	Port 1 to 4 IEEE802.3af/at @ POE
PoE Management	PoE working status Delay start of power supply PoE output priority configuration Scheduling of PoE operation and time Total power limit of PoE power supply PoE output power allocation, off& af &at
Power Supply Pin	Default 1/2 (+), 3/6 (-)
Max Power Per Port	30W; IEEE802.3af/at
Total PWR / Input Voltage	65W/ (AC100-240V)
Power Consumption	Standby<6W, Full load<60W
Power Supply	Built in power supply , AC100~240V 50-60Hz 1A



6-port Full Gigabit Managed POE Switch

BC3104PGM2F-65W Series

Physical Parameter

Operation TEMP / Humidity	-20~+55°C;5%~90% RH Non condensing
Storage TEMP / Humidity	-40~+75°C;5%~95% RH Non condensing
Dimension (L*W*H)	270*181*44.5mm
Net /Gross Weight	<1.5kg / <2.0kg
Installation	desktop type, wall-mounted, 19 inch 1U cabinet installation

Certification & Warranty

Lightning protection / protection level	Lightning protection: 4KV 8/20us; Protection level: IP30
Certification	CCC;CE mark, commercial; CE/LVD EN60950;FCC Part 15 Class B; RoHS
Warranty	3 years, lifelong maintenance.

Network Management Features

Interface	IEEE802.3X (Full-duplex) Port temperature protection setting Port green Ethernet Energy-saving setting Broadcast storm control based on port speed The speed limit of the message flow in the access port. The minimum particle size is 64Kbps.
Layer 3 Features	L2+ network management, IPV4 management Static route, Default route @ 128 pcs, APR @ 1024 pcs
VLAN	4K VLAN based on port, IEEE802.1q, VLAN based on the protocol VLAN based on MAC, QinQ configuration Port configuration of Access, Trunk, Hybrid



6-port Full Gigabit Managed POE Switch

BC3104PGM2F-65W Series

Port Aggregation	LACP, Static aggregation Max 3 aggregation groups and 8 ports per group.
Spanning Tree	STP (IEEE802.1d), RSTP (IEEE802.1w), MSTP (IEEE802.1s)
Multicast	MLD Snooping v1/v2, Multicast VLAN IGMP Snooping v1/v2, Max 250 multicast groups, Fast log out
Port Mirroring	Bidirectional data mirroring based on port
QoS	Flow-based Rate Limiting Flow-based Packet Filtering 8*Output queues of each port 802.1p/DSCP priority mapping Diff-Serv QoS, Priority Mark/Remark Queue Scheduling Algorithm (SP, WRR, SP+WRR)
ACL	Port-based Issuing ACL, ACL based on port and VLAN L2 to L4 packet filtering, matching first 80 bytes message. Provide ACL based on MAC, Destination MAC address, IP Source, Destination IP, IP Protocol Type, TCP/UDP Port, TCP/UDP Port Range, and VLAN, etc.
Security	IP-MAC-VLAN-Port binding ARP inspection, Anti-DoS attack AAA & RADIUS, MAC learning limit Mac black holes, IP source protection IEEE802.1X & MAC address authentication Broadcast storm control, Backup for host datum SSH 2.0, SSL, Port isolation, ARP message speed limit User hierarchical management and password protection
DHCP	DHCP Client, DHCP Snooping, DHCP Server, DHCP Relay
Management	One-key recovery, Cable Diagnose, LLDP




6-port Full Gigabit Managed POE Switch

BC3104PGM2F-65W Series

	<p>Web Management (HTTPS), NTP, System work log, Ping Test</p> <p>CPU instant utilization status view</p> <p>Console/AUX Modem/Telnet/SSH2.0 CLI</p> <p>Download & Management on FTP, TFTP, Xmodem, SFTP,SNMP</p> <p>V1/V2C/V3</p> <p>NMS - smart network management system platform (LLDP+SNMP)</p>
System	<p>Category 5 Ethernet network cable</p> <p>Web browser: Mozilla Firefox 2.5 or higher, Google browser chrome V42 or higher, Microsoft Internet Explorer10 or later;</p> <p>TCP/IP, network adapter, and network operating system (such as Microsoft Windows, Linux, or Mac OS X) installed on each computer in a network</p>

DIMENSION

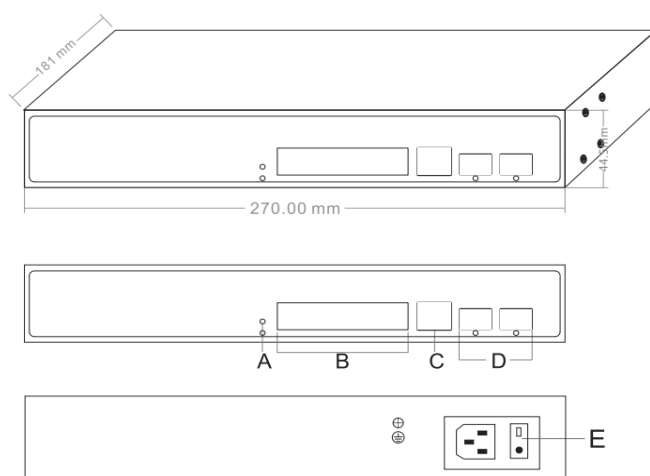


- A. Working Indicator
- B. 4*10/100/1000M PoE Ports
- C. Console Port
- D. 2*100/1000M SFP Ports
- E. Power Input Port 100-240V AC, 50/60Hz



6-port Full Gigabit Managed POE Switch BC3104PGM2F-65W Series

APPLICATION

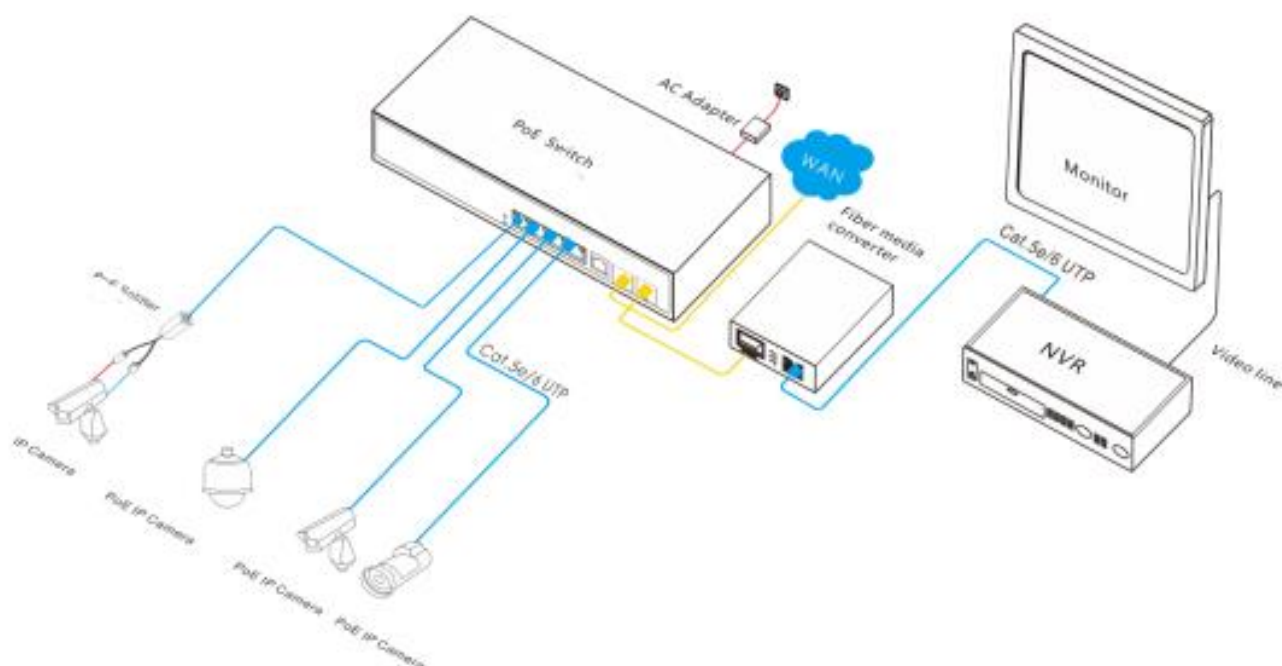



6-port Full Gigabit Managed POE Switch

BC3104PGM2F-65W Series

PACKING LIST

PACKING LIST	CONTENT	QTY	UNIT
	6-port full gigabit managed PoE switch	1	SET
	AC Power Cable	1	PC
	RJ45-DB9 Line	1	PC
	Mounting Kits(Hanging Ear)	1	SET
	User Guide	1	PC

BORN ELECTRONICS LIMITED

ADDRESS:

#337
Forest Road,
London
United Kingdom
Phone: +44 7859 571344
Email: info@bornelectronics.com

WARRANTY:

1 YEAR (EXPANDABLE UPTO 5 YEARS)

WEBSITE: <http://bornelectronics.com/>