



2 ports Industrial PoE switch BI601PE1F

❖ Overview

It is a 2-port industrial PoE switch that supports up to 1 *10/100M PoE port and 1*100M SFP/SC/ST slot/ Fixed fiber port. 1*10/100M RJ45 port support PoE+, conforming to IEEE 802.3af/at standard.

It supports relay alarm for power off, network broken and PoE off.

It has the characteristics of reliable work, strong and durable, high cost performance and so on. It can be used in security network video monitoring system, network engineering and other occasions.

❖ Pictures



Features

- ❖ With 1*10/100M PoE port and 1*100M SFP/SC/ST/Fix fiber port;
- ❖ Supports relay alarm for power off, network broken and PoE off;
- ❖ Supports 6KV surge protection, 6KV contact / 8KV air ESD protection;
- ❖ Supports working temperature -40°C~75°C



2 ports Industrial PoE switch BI601PE1F

❖ Specifications


Parameter	Specifications
Power supply	Powered by power adaptor
Range of voltage	DC 48~57V
Consumption	Self-consumption<5W
Downlink ports	Ports 1: 10/100Base-TX PoE 30W(IEEE802.3af/at standard) RJ45 port
Uplink ports	Ports 2: 100Base-TX SFP/SC/ST
Relay alarm	1 channel relay alarm output for power off, ports link down and PoE off
Cable and distance	Use cat5e/6,100m max
Standard	IEEE802.3, IEEE802.3u
Switch fabric	0.4 Gbps
Through put	0.2976 Mpps
Buffer	1M
MAC address table	8K
Indicator	Power: 2 *red ; Uplink2: Green LEDs indicate Link/Act Downlink 1: Yellow LED indicate PoE and green LEDs indicate Link/Act
Protection	Surge: 6KV, standard: IEC61000-4-5 ESD: 6KV: contact/8KV: air, standard:IEC61000-4-2
Working temperature	-40℃~75℃
Storage temperature	-40℃~85℃
Humidity	0~95%(No condensation)
Dimension(L×W×H)	101mm×65 mm×36mm
Material	Aluminum
Color	Black
Net-weight	300g




2 ports Industrial PoE switch BI601PE1F

❖ Panel diagram

● Front panel

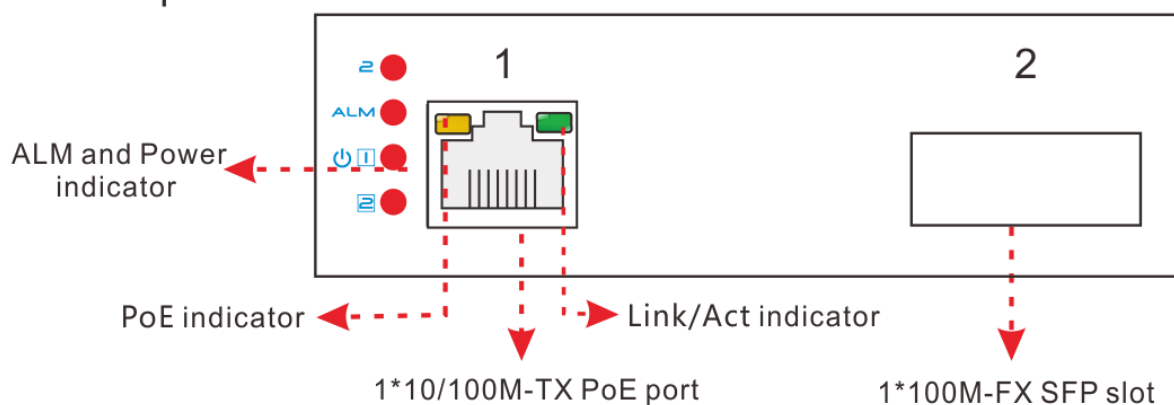

● Back panel

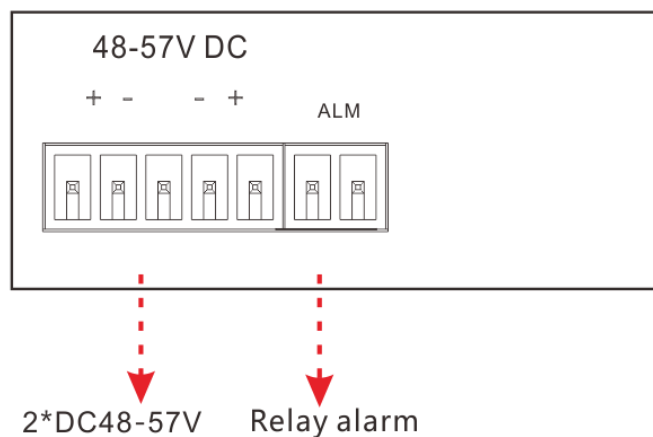


⚠ Attention 1: This product must be well grounded against lightning, please use better than 20# cable to connect the grounding terminal and ground.



2 ports Industrial PoE switch BI601PE1F

❖ Dimensions

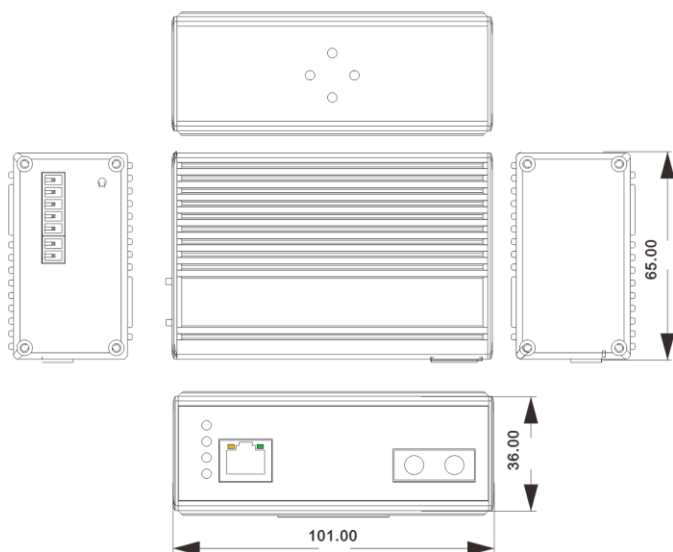

❖ Order information

Model	Description
BI601PE1F(Fixed)	With 1*10/100M PoE (IEEE802.3af/at standard) port and 1*100M SFP/SC/ST port/Fixed Fiber port; 2*DC48-57V power supply (Power adaptor buy extra); Supports relay alarm function for power off, network broken and PoE off.

BORN ELECTRONICS LIMITED

ADDRESS:

#337
Forest Road,
London
United Kingdom
Phone: +44 7859 571344
Email: info@bornelectronics.com

WARRANTY:

1 YEAR (EXPANDABLE UPTO 5 YEARS)

WEBSITE: <http://bornelectronics.com/>