

EMC TEST REPORT
For
BORN ELECTRONICS LIMITED
POE switch
Test Model: BI602PG2F
Additional Model No.: Refer to page 9

Prepared for : BORN ELECTRONICS LIMITED
Address : 157 SIXTH AVENUE LONDON E12 5PT

Prepared by : Shenzhen LCS Compliance Testing Laboratory Ltd.
Address : Room 101, 201, Building A and Room 301, Building C,
Juji Industrial Park, Yabianxueziwei, Shajing Street,
Bao' an District, Shenzhen, Guangdong, China

Tel : (+86)755-82591330
Fax : (+86)755-82591332
Web : www.LCS-cert.com
Mail : webmaster@LCS-cert.com

Date of receipt of test sample : May 21, 2020
Number of tested samples : 1
Serial number : Prototype
Date of Test : May 21, 2020 ~ May 28, 2020
Date of Report : April 08, 2021



EMC TEST REPORT

EN 55032: 2015

Electromagnetic compatibility of multimedia equipment - Emission Requirements

EN 55035: 2017

Electromagnetic compatibility of multimedia equipment – Immunity requirements

Report Reference No. : LCS200518066AE100

Date of Issue..... : April 08, 2021

Testing Laboratory Name..... : Shenzhen LCS Compliance Testing Laboratory Ltd.

Address..... : Room 101, 201, Building A and Room 301, Building C, Juji Industrial Park, Yabianxueziwei, Shajing Street, Bao’ an District, Shenzhen, Guangdong, China

**Testing Location/ Procedure.... : Full application of Harmonised standards ■
 Partial application of Harmonised standards □
 Other standard testing method □**

Applicant’s Name..... : BORN ELECTRONICS LIMITED

Address..... : 157 SIXTH AVENUE LONDON E12 5PT

Test Specification

**Standard..... : EN 55032: 2015
 EN 55035: 2017
 EN 61000-3-2: 2014
 EN 61000-3-3: 2013**

Test Report Form No..... : LCSEMC-1.0

TRF Originator..... : Shenzhen LCS Compliance Testing Laboratory Ltd.

Master TRF..... : Dated 2011-03

Shenzhen LCS Compliance Testing Laboratory Ltd. All rights reserved.

This publication may be reproduced in whole or in part for non-commercial purposes as long as the Shenzhen LCS Compliance Testing Laboratory Ltd. is acknowledged as copyright owner and source of the material. Shenzhen LCS Compliance Testing Laboratory Ltd. takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.

Test Item Description..... : POE switch

Trade Mark..... : N/A

Test Model..... : BI602PG2F

Ratings..... : Input: DC 48-57V

Result : PASS

Compiled by:

Lucky Xie

Supervised by:

Tom Wang



Approved by:

Gavin Liang/ Manager

Lucky Xie/ File administrators

Tom Wang/ Technique principal

EMC -- TEST REPORT

Test Report No. : LCS200518066AE100April 08, 2021
Date of issue

Test Model..... : BI602PG2F

EUT..... : POE switch

Applicant..... : BORN ELECTRONICS LIMITED

Address..... : 157 SIXTH AVENUE LONDON E12 5PT

Telephone..... : /

Fax..... : /

Manufacturer..... : BORN ELECTRONICS LIMITED

Address..... : 157 SIXTH AVENUE LONDON E12 5PT

Telephone..... : /

Fax..... : /

Factory..... : BORN ELECTRONICS LIMITED

Address..... : 157 SIXTH AVENUE LONDON E12 5PT

Telephone..... : /

Fax..... : /

Test Result**PASS**

The test report merely corresponds to the test sample.
It is not permitted to copy extracts of these test result without the written permission of the test laboratory.

Revision History

Revision	Issue Date	Revisions	Revised By
000	May 29, 2020	Initial Issue	Gavin Liang
100	April 08, 2021	Revised	Gavin Liang

lish“Remark : This report is based on the report No. LCS200518066AE. This report is invalid without the original report.

for changing the following information:

- 1.Changed applicant and Manufacturer and Factory to Born Electronics limited
- 2.Changed applicant address to 157 SIXTH AVENUE LONDON E12 5PT
- 3.Product model changed to BI602PG2F
- 4.Change trade Test Additional Model No to BI604E1E, BI602PDG1F, BI608G, BI601E1F, BI601PG1F
- 5.Changed External and internal photos of the EUT

Other contents still remain the same with the previous one.

TABLE OF CONTENTS

Test Report Description	Page
1. TEST STANDARDS	6
2.SUMMARY OF STANDARDS AND RESULTS	7
2.1. DESCRIPTION OF STANDARDS AND RESULTS.....	7
2.2. DESCRIPTION OF PERFORMANCE CRITERIA.....	8
3. GENERAL INFORMATION	9
3.1. DESCRIPTION OF DEVICE (EUT).....	9
3.2 SUPPORT EQUIPMENT LIST.....	9
3.3. DESCRIPTION OF TEST FACILITY.....	9
3.4. STATEMENT OF THE MEASUREMENT UNCERTAINTY.....	10
3.5. MEASUREMENT UNCERTAINTY.....	10
4. MEASURING DEVICES AND TEST EQUIPMENT	11
5. TEST RESULTS	14
5.1. POWER LINE CONDUCTED EMISSION MEASUREMENT.....	14
5.2. TELECOMMUNICATION LINE CONDUCTED EMISSION MEASUREMENT.....	20
5.3. RADIATED EMISSION MEASUREMENT.....	23
5.4. HARMONIC CURRENT EMISSION MEASUREMENT.....	26
5.5. VOLTAGE FLUCTUATION AND FLICKER MEASUREMENT.....	27
5.6. ELECTROSTATIC DISCHARGE IMMUNITY TEST.....	28
5.7. RF FIELD STRENGTH SUSCEPTIBILITY TEST.....	31
5.8. ELECTRICAL FAST TRANSIENT/BURST IMMUNITY TEST.....	34
5.9. SURGE IMMUNITY TEST.....	37
5.10. INJECTED CURRENTS SUSCEPTIBILITY TEST.....	40
5.11. MAGNETIC FIELD SUSCEPTIBILITY TEST.....	43
5.12. VOLTAGE DIPS AND INTERRUPTIONS TEST.....	45
6. PHOTOGRAPHS OF TEST SETUP	47
7. PHOTOGRAPHS OF THE EUT	52

1. TEST STANDARDS

The tests were performed according to following standards:

EN 55032: 2015 Electromagnetic compatibility of multimedia equipment - Emission Requirements

EN 55035: 2017 Electromagnetic compatibility of multimedia equipment – Immunity requirements

EN 61000-3-2: 2014 Electromagnetic compatibility (EMC) -- Part 3-2: Limits - Limits for harmonic current emissions (equipment input current up to and including 16 A per phase)

EN 61000-3-3: 2013 Electromagnetic compatibility (EMC) -- Part 3-3: Limits - Limitation of voltage changes, voltage fluctuations and flicker in public low-voltage supply systems, for equipment with rated current ≤ 16 A per phase and not subject to conditional connection

2.SUMMARY OF STANDARDS AND RESULTS

2.1. Description of Standards and Results

The EUT have been tested according to the applicable standards as referenced below.

Emission (EN 55032: 2015)			
Description of Test Item	Standard	Limits	Results
Conducted disturbance at mains terminals	EN 55032: 2015	Class A	PASS
Conducted disturbance at telecommunication port	EN 55032: 2015	Class A	PASS
Radiated disturbance	EN 55032: 2015	Class A	PASS
Harmonic current emissions	EN 61000-3-2: 2014	Class A	N/A
Voltage fluctuations & flicker	EN 61000-3-3: 2013	-----	PASS
Immunity (EN 55035: 2017)			
Description of Test Item	Basic Standard	Performance Criteria	Results
Electrostatic discharge (ESD)	EN 61000-4-2: 2009	B	PASS
Radio-frequency, Continuous radiated disturbance	EN 61000-4-3: 2006+A2: 2010	A	PASS
Electrical fast transient (EFT)	EN 61000-4-4: 2012	B	PASS
Surge (Input a.c. power ports)	EN 61000-4-5: 2014+A1: 2017	B	PASS
Surge (Telecommunication ports)		B	N/A
Radio-frequency, Continuous conducted disturbance	EN 61000-4-6: 2014	A	PASS
Power frequency magnetic field	EN 61000-4-8: 2010	A	PASS
Voltage dips, >95% reduction	EN 61000-4-11: 2004+A1: 2017	B	PASS
Voltage dips, 30% reduction		C	PASS
Voltage interruptions		C	PASS
***Note: N/A is an abbreviation for Not Applicable.			

Test mode:		
Mode 1	LAN Mode	Record

2.2. Description of Performance Criteria

General Performance Criteria

Examples of functions defined by the manufacturer to be evaluated during testing include, but are not limited to, the following:

- essential operational modes and states;
- tests of all peripheral access (hard disks, floppy disks, printers, keyboard, mouse, etc.);
- quality of software execution;
- quality of data display and transmission;
- quality of speech transmission.

2.2.1. Performance criterion A

The equipment shall continue to operate as intended without operator intervention. No degradation of performance or loss of function is allowed below a performance level specified by the manufacture when the equipment is used as intended. The performance level may be replaced by a permissible loss of performance. If the minimum performance level or the permissible performance loss is not specified by the manufacturer, then either of these may be derived from the product description and documentation, and by what the user may reasonably expect from the equipment if used as intended.

2.2.2. Performance criterion B

After the test, the equipment shall continue to operate as intended without operator intervention. No degradation of performance or loss of function is allowed, after the application of the phenomena below a performance level specified by the manufacture, when the equipment is used as intended. The performance level may be replaced by a permissible loss of performance.

During the test, degradation of performance is allowed. However, no change of operation state or stored data is allowed to persist after the test.

If the minimum performance level (or the permissible performance loss) is not specified by the manufacturer, then either of these may be derived from the product description and documentation, and by what the user may reasonably expect from the equipment if used as intended.

2.2.3. Performance criterion C

Loss of function is allowed, provided the function is self-recoverable, or can be restored by the operation of the controls by the user in accordance with the manufacture's instructions.

Functions, and/or information stored in non-volatile memory, or protected by a battery backup, shall not be lost.

3. GENERAL INFORMATION

3.1. Description of Device (EUT)

EUT	: POE switch
Trade Mark	: N/A
Test Model	: BI602PG2F
Additional Model	: BI604E1E, BI602PDG1F, BI608G, BI601E1F, BI601PG1F
Model Declaration	: only for the annex models, with same sockets in minor difference, as color and appearance, less than 20 models in total
Power Supply	: Input: DC 48-57V

Highest internal frequency (Fx)	Highest measured frequency
$F_x \leq 108 \text{ MHz}$ $108 \text{ MHz} < F_x \leq 500 \text{ MHz}$ $500 \text{ MHz} < F_x \leq 1 \text{ GHz}$ $F_x > 1 \text{ GHz}$	1 GHz 2 GHz 5 GHz $5 \times F_x$ up to a maximum of 6 GHz
NOTE 1 For FM and TV broadcast receivers, Fx is determined from the highest frequency generated or used excluding the local oscillator and tuned frequencies. NOTE 2 Fx is defined in EN 55032 Section 3.1.19. Where Fx is unknown, the radiated emission measurements shall be performed up to 6 GHz	

3.2 Support Equipment List

Description	Manufacturer	Model	Serial Number
PC	DELL	vostro15-7570	---

3.3. Description of Test Facility

FCC Registration Number is 254912.
 Industry Canada Registration Number is 9642A-1.
 ESMD Registration Number is ARCB0108.
 UL Registration Number is 100571-492.
 TUV SUD Registration Number is SCN1081.
 TUV RH Registration Number is UA 50296516-001
 NVLAP Registration Code is 600167-0.

3.4. Statement of The Measurement Uncertainty

The data and results referenced in this document are true and accurate. The reader is cautioned that there may be errors within the calibration limits of the equipment and facilities. The measurement uncertainty was calculated for all measurements listed in this test report acc. To CISPR 16 – 4 “Specification for radio disturbance and immunity measuring apparatus and methods – Part 4: Uncertainty in EMC Measurements” and is documented in the LCS quality system acc. To DIN EN ISO/IEC 17025. Furthermore, component and process variability of devices similar to that tested may result in additional deviation. The manufacturer has the sole responsibility of continued compliance of the device.

3.5. Measurement Uncertainty

Test	Parameters	Expanded uncertainty (U_{lab})	Expanded uncertainty (U_{cispr})
Conducted Emission	Level accuracy (9kHz to 150kHz) (150kHz to 30MHz)	± 2.63 dB ± 2.35 dB	± 3.8 dB ± 3.4 dB
Radiated Emission	Level accuracy (30MHz to 1000MHz)	± 3.48 dB	± 5.3 dB
Radiated Emission	Level accuracy (above 1000MHz)	± 3.90 dB	± 5.2 dB
Mains Harmonic	Voltage	$\pm 0.510\%$	N/A
Voltage Fluctuations & Flicker	Voltage	$\pm 0.510\%$	N/A
EMF	/	$\pm 21.59\%$	N/A

1) Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus.
2) The reported expanded uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor of $k=2$, which for a normal distribution corresponds to a coverage probability of approximately 95%.

4. MEASURING DEVICES AND TEST EQUIPMENT

Test Item: Conducted Disturbance					
Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.
1	EMI Test Software	AUDIX	E3	/	N/A
2	EMI Test Receiver	R&S	ESPI	101840	2019-06-11
3	Artificial Mains	R&S	ENV216	101288	2019-06-12
4	10dB Attenuator	SCHWARZBECK	MTS-IMP-136	261115-001-0032	2019-06-11
5	Impedance Stabilization Network	TESEQ	ISN T800	45130	2018-11-15

Test Item: Radiated Disturbance (Electric Field)					
Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.
1	EMI Test Software	AUDIX	E3	/	N/A
2	3m Semi Anechoic Chamber	SIDT FRANKONIA	SAC-3M	03CH03-HY	2019-06-12
3	Positioning Controller	MF	MF-7082	/	2019-06-12
4	By-log Antenna	SCHWARZBECK	VULB9163	9163-470	2019-07-25
5	Horn Antenna	SCHWARZBECK	BBHA 9120D	9120D-1925	2019-07-01
6	EMI Test Receiver	R&S	ESR 7	101181	2019-06-12
7	RS SPECTRUM ANALYZER	R&S	FSP40	100503	2018-11-15
8	Broadband Preamplifier	/	BP-01M18G	P190501	2019-07-01
9	RF Cable-R03m	Jye Bao	RG142	CB021	2019-06-12
10	RF Cable-HIGH	SUHNER	SUCOFLEX 106	03CH03-HY	2019-06-12

Test Item: Harmonic Current					
Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.
1	Power Analyzer Test System	Voltech	PM6000	20000670053	2019-06-12

Test Item: Voltage fluctuation and Flicker					
Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.
1	Power Analyzer Test System	Voltech	PM6000	20000670053	2019-06-12

Test Item: Electrostatic Discharge					
Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.
1	ESD Simulator	SCHLODER	SESD 230	604035	2019-06-13

Test Item: RF Field Strength Susceptibility

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.
1	RS Test Software	Tonscend	/	/	N/A
2	ESG Vector Signal Generator	Agilent	E4438C	MY42081396	2018-11-15
3	3m Semi Anechoic Chamber	SIDT FRANKONIA	SAC-3M	03CH03-HY	2019-06-12
4	RF POWER AMPLIFIER	OPHIR	5225R	1052	NCR
5	RF POWER AMPLIFIER	OPHIR	5273F	1019	NCR
6	Stacked Broadband Log Periodic Antenna	SCHWARZBECK	STLP 9128	9128ES-145	NCR
7	Stacked Mikrowellen Log.-Per Antenna	SCHWARZBECK	STLP 9149	9149-484	NCR
8	Electric field probe	Narda S.TS./PMM	EP601	611WX80208	2020-03-24

Note: NCR means no calibration requirement

Test Item: Electrical Fast Transient/Burst

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.
1	Immunity Simulative Generator	EM TEST	UCS500 M4	0101-34	2019-06-11

Test Item: Surge

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.
1	Immunity Simulative Generator	EM TEST	UCS500 M4	0101-34	2019-06-11

Test Item: Conducted Susceptibility

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.
1	Simulator	FRANKONIA	CIT-10/75	A126A1195	2019-06-11
2	CDN	FRANKONIA	CDN-M2+M3	A2210177	2019-06-11
3	6dB Attenuator	FRANKONIA	DAM25W	1172040	2019-06-11

Test Item: Power Frequency Magnetic Field Susceptibility

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.
1	Power frequency mag-field generator System	EVERFINE	EMS61000-8K	906003	2019-06-11

Test Item: Voltage Dips

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.
1	Voltage dips and up generator	3CTEST	VDG-1105G	EC0171014	2019-06-11


Test Item: Voltage Short Interruptions

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.
1	Voltage dips and up generator	3CTEST	VDG-1105G	EC0171014	2019-06-11

5. TEST RESULTS

5.1. POWER LINE CONDUCTED EMISSION MEASUREMENT

5.1.1. Block Diagram of Test Setup

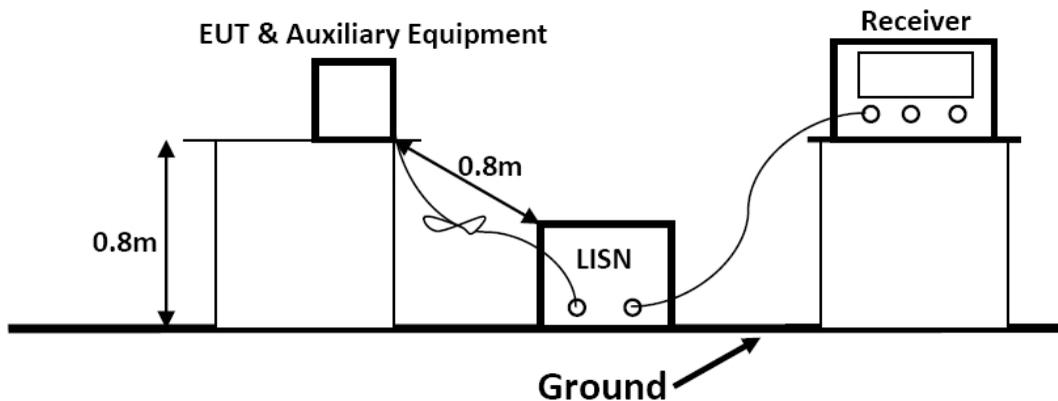

5.1.2. Test Standard

EN 55032: 2015 Class A

Power Line Conducted Emission Limits (Class A)		
Frequency (MHz)	Limit (dB μ V)	
	Quasi-peak Level	Average Level
0.15 ~ 0.50	79	66
0.50 ~ 30.00	73	60

NOTE1-The lower limit shall apply at the transition frequencies.
NOTE2-The limit decreases linearly with the logarithm of the frequency in the range 0.15MHz to 0.50MHz.

5.1.3. EUT Configuration on Test

The following equipments are installed on Power Line Conducted Emission Measurement to meet the EN 55032 requirement and operating regulations in a manner, which tends to maximize its emission characteristics in a normal application.

5.1.4. Operating Condition of EUT

5.1.4.1. Setup the EUT as shown on Section 5.1.1

5.1.4.2. Turn on the power of all equipments.

5.1.4.3. Let the EUT work in measuring Mode 1 and measure it.

5.1.5. Test Procedure

The EUT is put on the plane 0.8m high above the ground by insulating support and connected to the AC mains through Line Impedance Stability Network (L.I.S.N). This provided 50-ohm coupling impedance for the tested equipments. Both sides of AC line are investigated to find out the maximum conducted emission according to the EN 55032 regulations during conducted emission measurement.

The bandwidth of the field strength meter is set at 9kHz in 150kHz~30MHz.


The frequency range from 150kHz to 30MHz is investigated.

5.1.6. Test Results

PASS.


The test result please refer to the next page.

Test Model	BI602PG2F	Test Mode	Mode 1
Environmental Conditions	23.3°C, 53.7% RH	Test Engineer	Jay Li
Pol.	Line	Test Voltage	AC 230V/50Hz

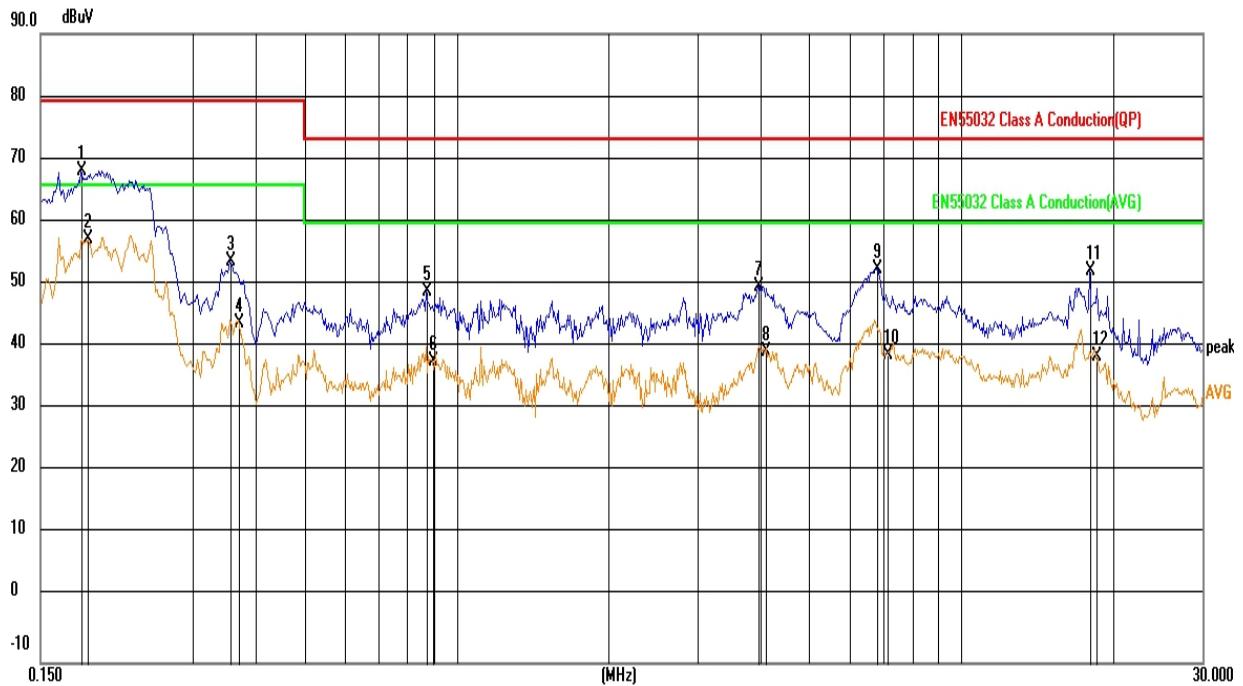

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Remark
1	0.1814	49.08	19.17	68.25	79.00	-10.75	QP
2	0.1862	38.29	19.17	57.46	66.00	-8.54	AVG
3	0.3568	34.64	19.31	53.95	79.00	-25.05	QP
4	0.3709	24.84	19.31	44.15	66.00	-21.85	AVG
5	0.8739	29.89	19.30	49.19	73.00	-23.81	QP
6	0.8969	18.57	19.30	37.87	60.00	-22.13	AVG
7	3.9615	30.42	19.47	49.89	73.00	-23.11	QP
8	4.1100	19.99	19.47	39.46	60.00	-20.54	AVG
9	6.7873	33.05	19.58	52.63	73.00	-20.37	QP
10	7.1295	19.39	19.59	38.98	60.00	-21.02	AVG
11	18.0330	32.18	20.27	52.45	73.00	-20.55	QP
12	18.4875	18.55	20.29	38.84	60.00	-21.16	AVG


Test Model	BI602PG2F	Test Mode	Mode 1
Environmental Conditions	23.3°C, 53.7% RH	Test Engineer	Jay Li
Pol.	Neutral	Test Voltage	AC 230V/50Hz

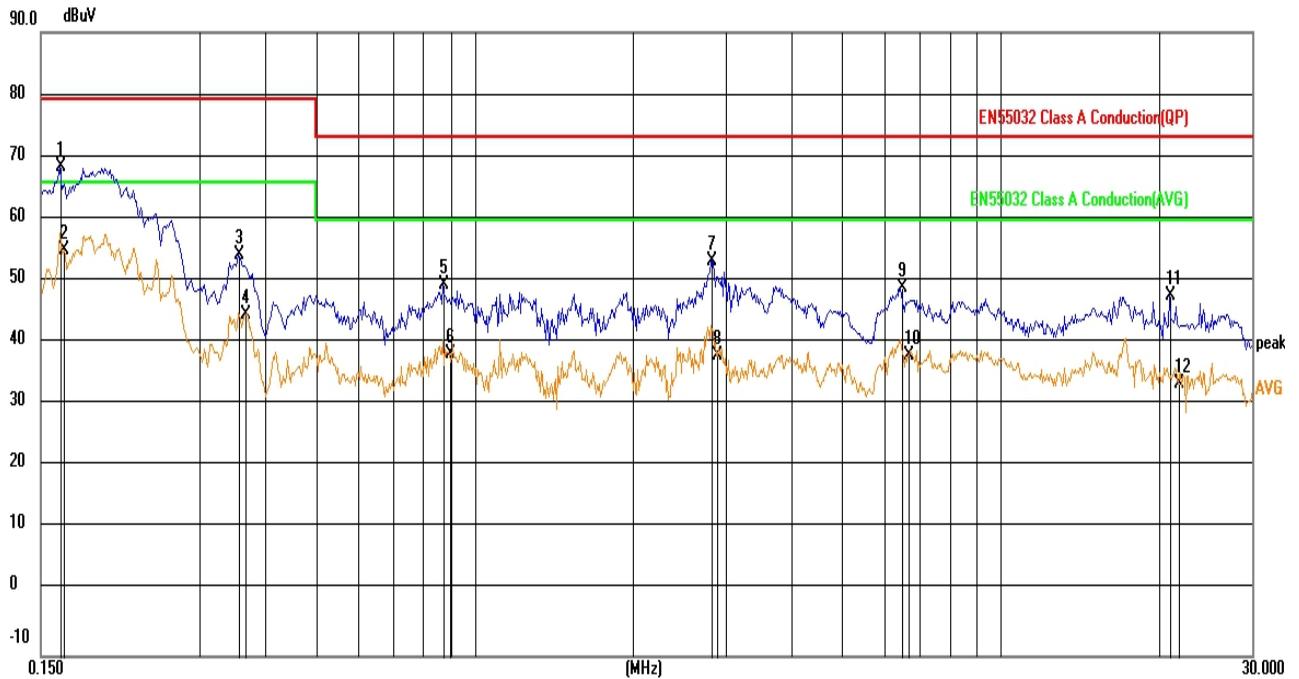

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Remark
1	0.1635	49.35	19.15	68.50	79.00	-10.50	QP
2	0.1658	36.07	19.16	55.23	66.00	-10.77	AVG
3	0.3568	35.14	19.31	54.45	79.00	-24.55	QP
4	0.3672	25.37	19.31	44.68	66.00	-21.32	AVG
5	0.8739	30.39	19.30	49.69	73.00	-23.31	QP
6	0.8969	19.07	19.30	38.37	60.00	-21.63	AVG
7	2.8093	33.99	19.46	53.45	73.00	-19.55	QP
8	2.8950	18.76	19.47	38.23	60.00	-21.77	AVG
9	6.4588	29.62	19.56	49.18	73.00	-23.82	QP
10	6.6749	18.79	19.56	38.35	60.00	-21.65	AVG
11	20.9847	27.48	20.30	47.78	73.00	-25.22	QP
12	21.8170	13.47	20.29	33.76	60.00	-26.24	AVG


Note: Pre-Scan all mode, Thus record worse case mode result in this report.

Test Model	BI602PG2F	Test Mode	Mode 1
Environmental Conditions	23.3°C, 53.7% RH	Test Engineer	Jay Li
Pol.	Line	Test Voltage	AC 120V/60Hz

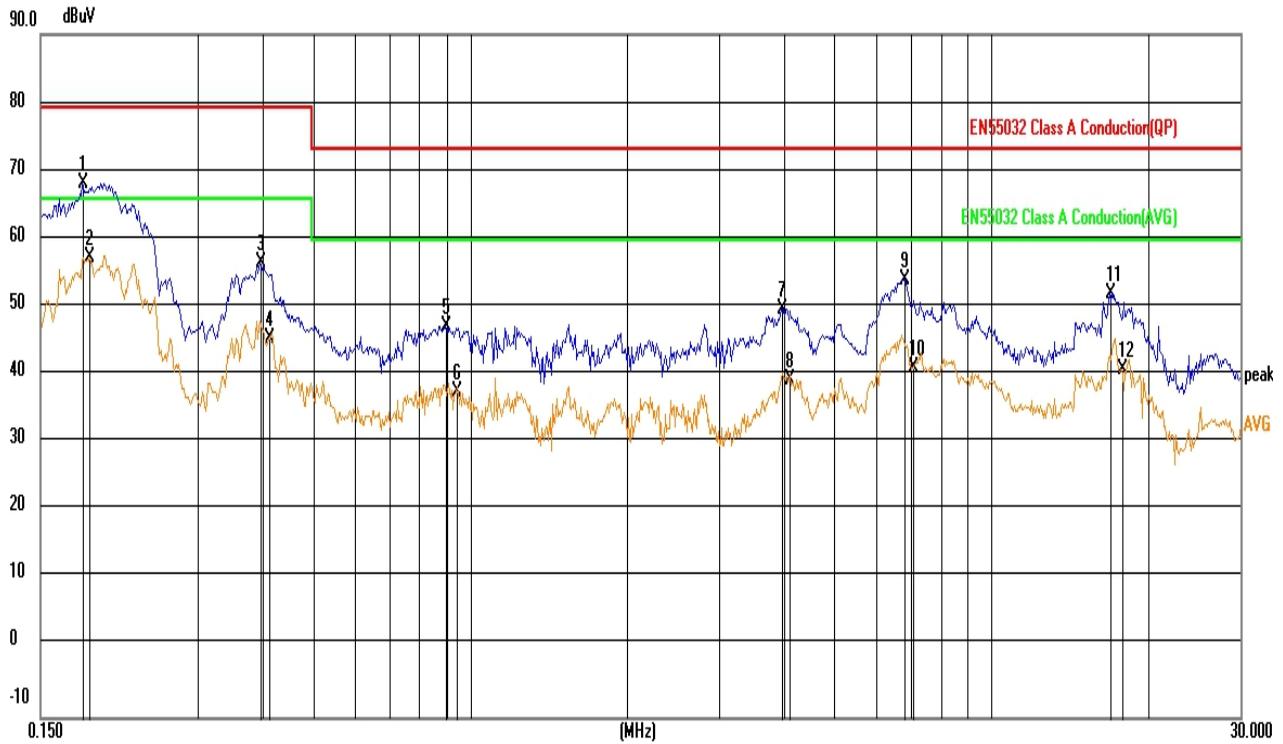

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Remark
1	0.1814	49.08	19.17	68.25	79.00	-10.75	QP
2	0.1862	38.29	19.17	57.46	66.00	-8.54	AVG
3	0.3975	37.28	19.31	56.59	79.00	-22.41	QP
4	0.4107	26.18	19.32	45.50	66.00	-20.50	AVG
5	0.8969	28.11	19.30	47.41	73.00	-25.59	QP
6	0.9415	18.56	19.29	37.85	60.00	-22.15	AVG
7	3.9615	30.42	19.47	49.89	73.00	-23.11	QP
8	4.1100	19.99	19.47	39.46	60.00	-20.54	AVG
9	6.7873	34.55	19.58	54.13	73.00	-18.87	QP
10	7.0933	21.80	19.58	41.38	60.00	-18.62	AVG
11	16.8945	31.92	20.22	52.14	73.00	-20.86	QP
12	17.8033	20.72	20.27	40.99	60.00	-19.01	AVG

Test Model	BI602PG2F	Test Mode	Mode 1
Environmental Conditions	23.3°C, 53.7% RH	Test Engineer	Jay Li
Pol.	Neutral	Test Voltage	AC 120V/60Hz

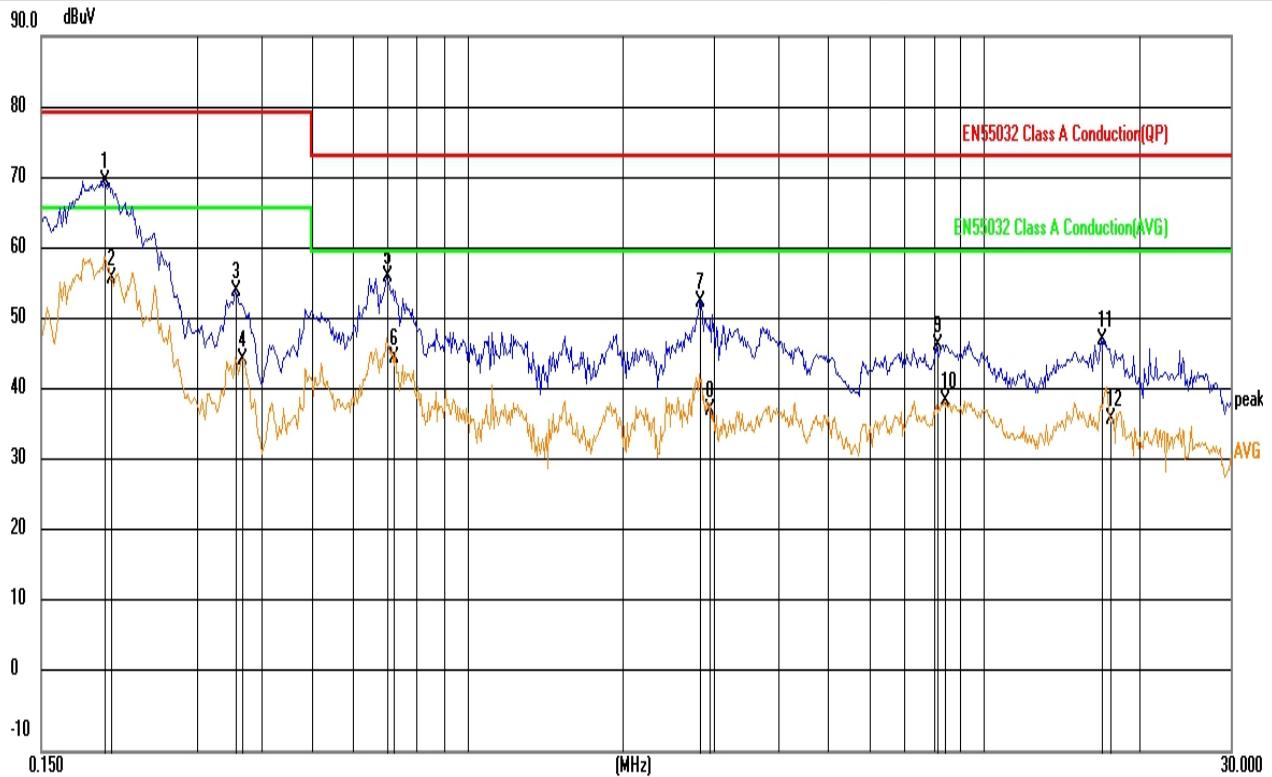


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Remark
1	0.1995	50.55	19.18	69.73	79.00	-9.27	QP
2	0.2048	37.06	19.18	56.24	66.00	-9.76	AVG
3	0.3568	35.14	19.31	54.45	79.00	-24.55	QP
4	0.3672	25.37	19.31	44.68	66.00	-21.32	AVG
5	0.6985	37.06	19.28	56.34	73.00	-16.66	QP
6	0.7214	25.73	19.30	45.03	60.00	-14.97	AVG
7	2.8093	33.49	19.46	52.95	73.00	-20.05	QP
8	2.9400	18.23	19.47	37.70	60.00	-22.30	AVG
9	8.1416	27.21	19.64	46.85	73.00	-26.15	QP
10	8.4075	19.23	19.65	38.88	60.00	-21.12	AVG
11	16.8945	27.42	20.22	47.64	73.00	-25.36	QP
12	17.5015	16.34	20.25	36.59	60.00	-23.41	AVG

Note: Pre-Scan all mode, Thus record worse case mode result in this report.

5.2. TELECOMMUNICATION LINE CONDUCTED EMISSION MEASUREMENT

5.2.1. Block Diagram of Test Setup

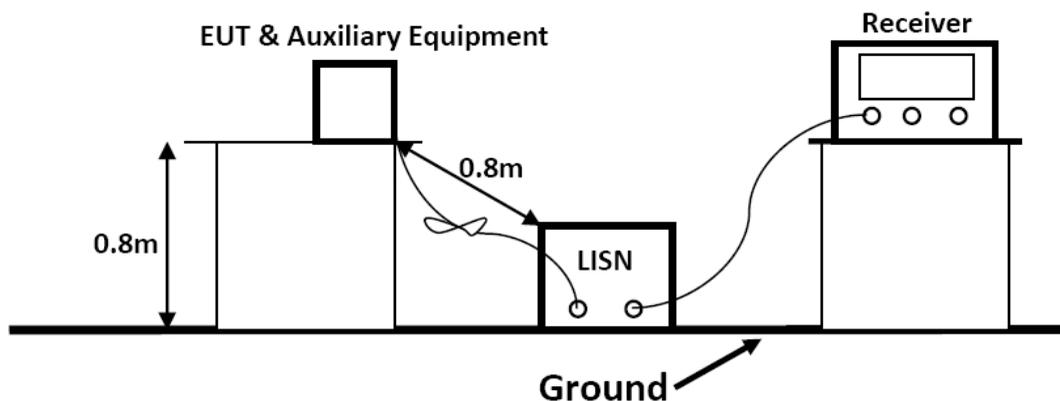

5.2.2. Test Standard

EN 55032: 2015

Telecommunication Line Conducted Emission Limits (Class A)

Frequency (MHz)	Voltage Limit (dB μ V)		Current Limit (dB μ V)	
	Quasi-peak	Average	Quasi-peak	Average
0.15 ~ 0.50	97 ~ 87	84 ~ 74	53 ~ 43	40 ~ 30
0.50 ~ 30.00	87	74	43	30

NOTE 1-The limits decrease linearly with the logarithm of the frequency in the range 0,15 MHz to 0,5 MHz.

NOTE 2-The current and voltage disturbance limits are derived for use with an impedance stabilization network (ISN) which presents a common mode (asymmetric mode) impedance of 150 Ω to the telecommunication port under test (conversion factor is $20 \log_{10} 150 / 1 = 44$ dB).

5.2.3. EUT Configuration on Test

The following equipments are installed on Power Line Conducted Emission Measurement to meet the EN 55032 requirement and operating regulations in a manner, which tends to maximize its emission characteristics in a normal application.

5.2.4. Operating Condition of EUT

5.2.4.1. Setup the EUT as shown on Section 5.2.1

5.2.4.2. Turn on the power of all equipments.

5.2.4.3. Let the EUT work in measuring mode (1) and measure it.

5.2.5. Test Procedure

The EUT is put on the plane 0.8m high above the ground by insulating support and connected to the ISN through Line Impedance Stability Network (L.I.S.N). This provided 50-ohm coupling impedance for the tested equipments. Both sides of ISN are investigated to find out the maximum conducted emission according to the EN 55032 regulations during conducted emission measurement.


The bandwidth of the field strength meter is set at 9kHz in 150kHz~30MHz.

5.2.6. Test Results

PASS

The frequency range from 150kHz to 30MHz is investigated.


Test Model	BI602PG2F	Test Mode	Mode 1
Environmental Conditions	23.3°C, 53.7% RH	Test Engineer	Jay Li
Pol	/	Test Voltage	AC 230V/50Hz

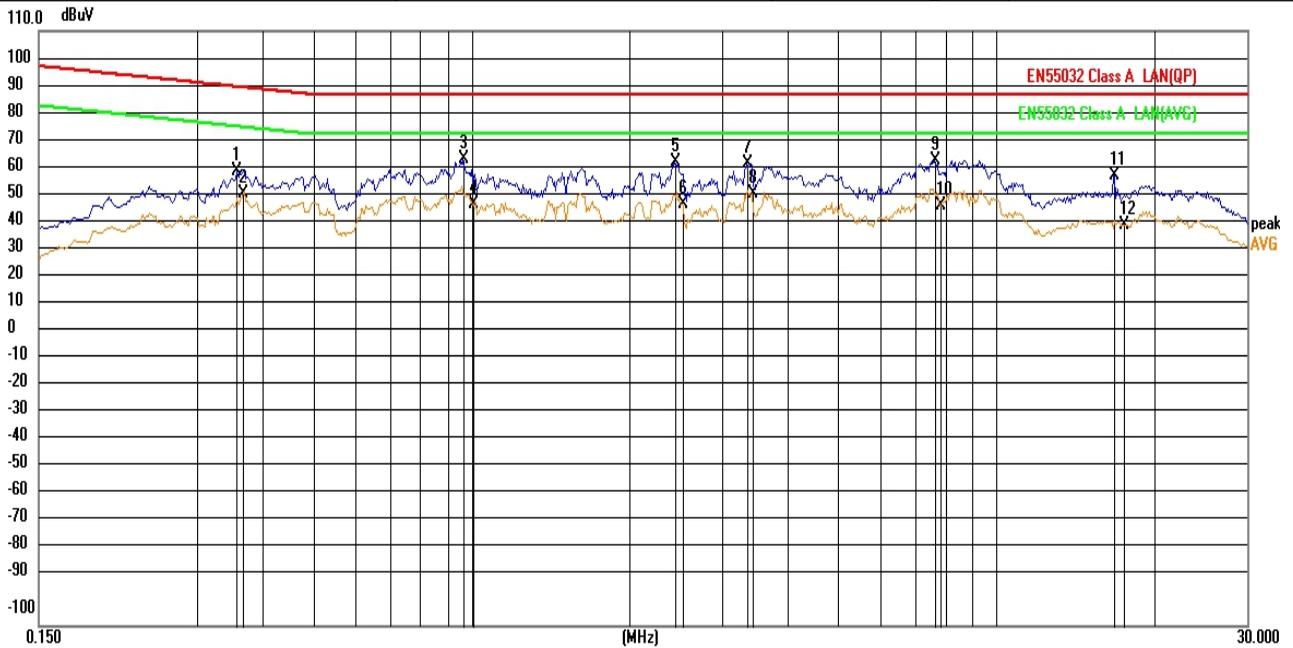


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Remark
1	0.3573	41.30	19.31	60.61	89.79	-29.18	QP
2	0.3672	33.41	19.31	52.72	76.56	-23.84	AVG
3	0.9644	45.29	19.28	64.57	87.00	-22.43	QP
4	1.0094	29.40	19.26	48.66	74.00	-25.34	AVG
5	2.4403	44.02	19.45	63.47	87.00	-23.53	QP
6	2.5169	29.36	19.45	48.81	74.00	-25.19	AVG
7	3.3540	43.58	19.47	63.05	87.00	-23.95	QP
8	3.4304	32.90	19.47	52.37	74.00	-21.63	AVG
9	7.6063	44.63	19.61	64.24	87.00	-22.76	QP
10	7.8135	28.63	19.63	48.26	74.00	-25.74	AVG
11	16.7280	38.89	20.23	59.12	87.00	-27.88	QP
12	17.4072	21.11	20.24	41.35	74.00	-32.65	AVG

5.3. RADIATED EMISSION MEASUREMENT

5.3.1. Block Diagram of Test Setup

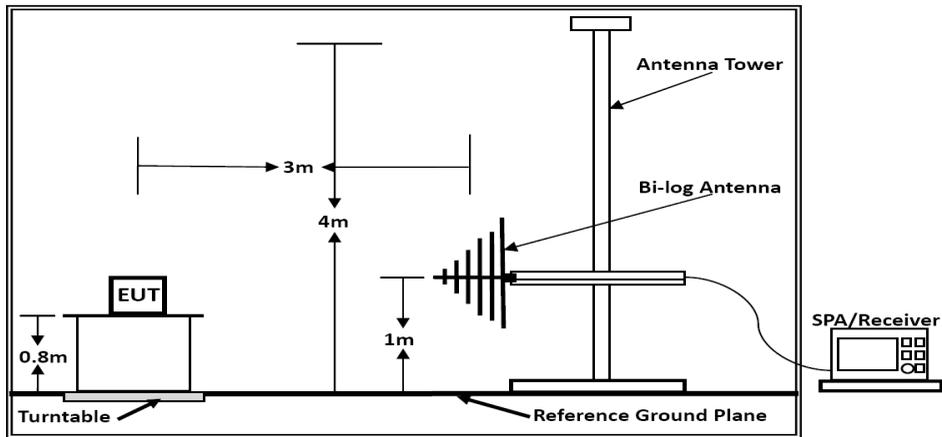

Below 1GHz

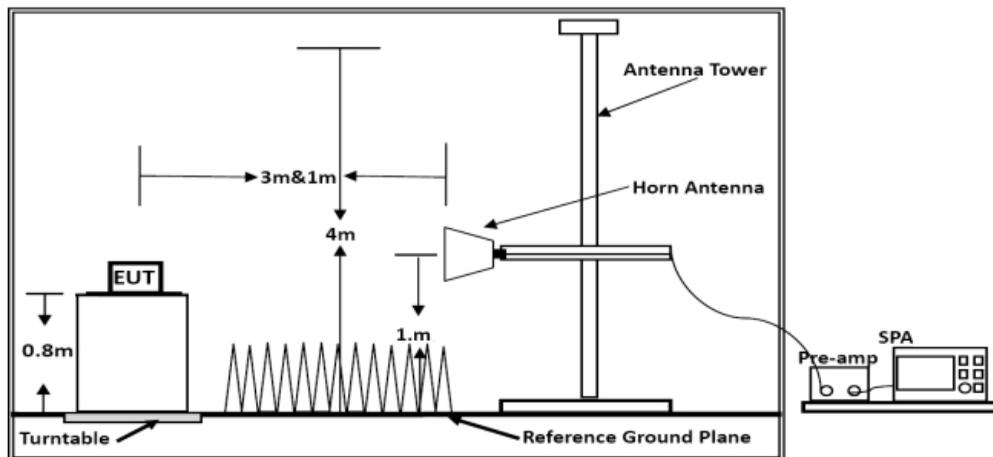

Above 1GHz

5.3.2. Test Standard

EN 55032: 2015 Class A

All emanations from a class A device or system, including any network of conductors and apparatus connected thereto, shall not exceed the level of field strengths specified below:

Limits for Radiated Emission Below 1GHz			
Frequency (MHz)	Distance (Meters)	Field Strengths Limit (dB μ V/m)	
30 ~ 230	3	50	
230 ~ 1000	3	57	
***Note: (1) The smaller limit shall apply at the combination point between two frequency bands. (2) Distance refers to the distance in meters between the measuring instrument antenna and the closed point of any part of the EUT.			
Limits for Radiated Emission Above 1GHz			
Frequency (MHz)	Distance (Meters)	Peak Limit (dB μ V/m)	Average Limit (dB μ V/m)
1000 ~ 3000	3	76	56
3000 ~ 6000	3	80	60
***Note: The lower limit applies at the transition frequency.			

5.3.3. EUT Configuration on Test

The EN 55032 regulations test method must be used to find the maximum emission during radiated emission measurement.

5.3.4. Operating Condition of EUT

5.3.4.1. Turn on the power.

5.3.4.2. Let the EUT work in the test Mode 1 and measure it.

5.3.5. Test Procedure

The EUT is placed on a turntable, which is 0.8 meter high above the ground. The turntable can rotate 360 degrees to determine the position of the maximum emission level. The EUT is set 3 meters away from the receiving antenna, which is mounted on an antenna tower. The antenna can be moved up and down from 1 to 4 meters to find out the maximum emission level. By-log antenna is used as a receiving antenna. Both horizontal and vertical polarization of the antenna is set on test.

The bandwidth of the EMI test receiver is set at RBW/VBW=120kHz/1000kHz.

The frequency range from 30MHz to 1000MHz is checked.

The bandwidth of the Spectrum analyzer is set at RBW/VBW=1MHz/3MHz.


The frequency range from 1GHz to the frequency which about 5th carrier harmonic or 6GHz is checked.

5.3.6. Test Results

PASS.


The test result please refer to the next page.

Test Model	BI602PG2F	Test Mode	Mode 1
Environmental Conditions	22.2°C, 53.3% RH	Detector Function	Quasi-peak
Pol.	Vertical	Distance	3m
Test Engineer	Jay Li	Test Voltage	AC 230V/50Hz

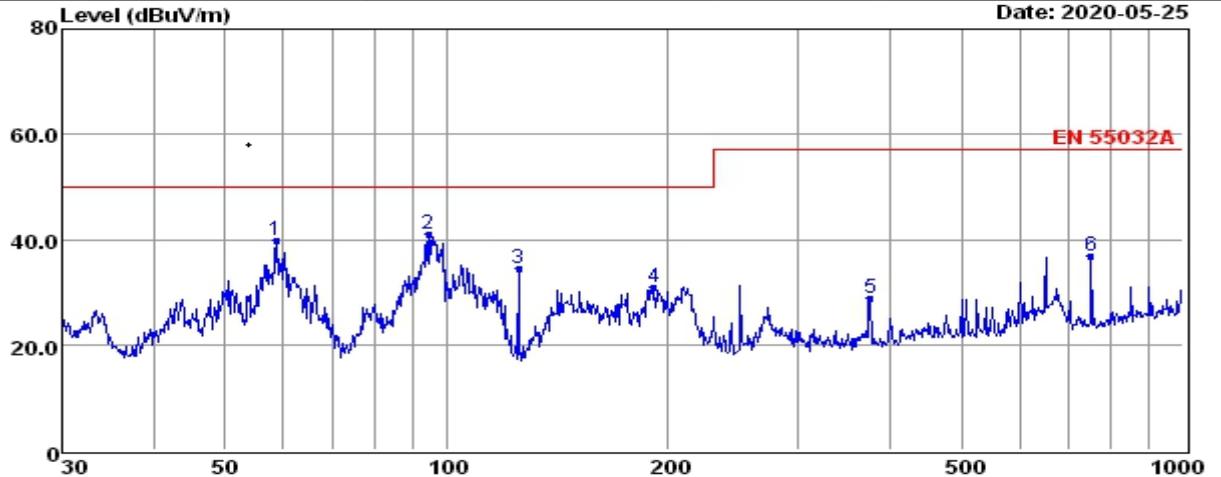

	Freq	Reading	CabLos	Antfac	Measured	Limit	Over	Remark
	MHz	dBuV	dB	dB/m	dBuV/m	dBuV/m	dB	
1	58.61	26.56	0.49	12.78	39.83	50.00	-10.17	QP
2	94.43	27.72	0.58	12.73	41.03	50.00	-8.97	QP
3	125.01	24.18	0.71	9.70	34.59	50.00	-15.41	QP
4	191.07	19.48	0.86	10.56	30.90	50.00	-19.10	QP
5	375.94	13.17	1.10	14.56	28.83	57.00	-28.17	QP
6	750.11	15.74	1.65	19.44	36.83	57.00	-20.17	QP

Test Model	BI602PG2F	Test Mode	Mode 1
Environmental Conditions	22.2°C, 53.3% RH	Detector Function	Quasi-peak
Pol.	Horizontal	Distance	3m
Test Engineer	Jay Li	Test Voltage	AC 230V/50Hz

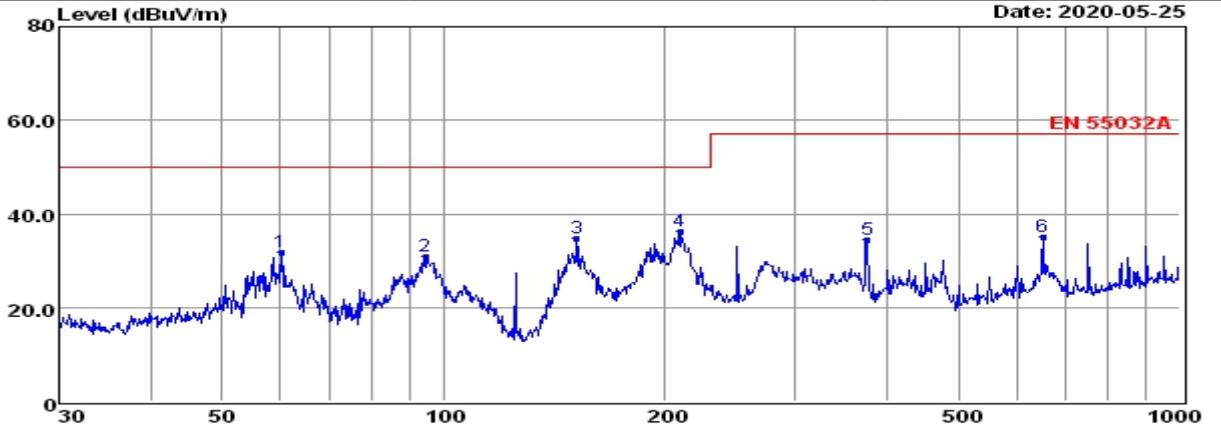


	Freq	Reading	CabLos	Antfac	Measured	Limit	Over	Remark
	MHz	dBuV	dB	dB/m	dBuV/m	dBuV/m	dB	
1	60.07	18.79	0.49	12.66	31.94	50.00	-18.06	QP
2	94.43	17.77	0.58	12.73	31.08	50.00	-18.92	QP
3	151.60	25.71	0.73	8.33	34.77	50.00	-15.23	QP
4	209.31	24.56	0.86	10.86	36.28	50.00	-13.72	QP
5	375.94	18.97	1.10	14.56	34.63	57.00	-22.37	QP
6	651.94	14.78	1.58	18.64	35.00	57.00	-22.00	QP

Note: Pre-Scan all mode, Thus record worse case mode result in this report.

5.4. HARMONIC CURRENT EMISSION MEASUREMENT

5.4.1. Block Diagram of Test Setup

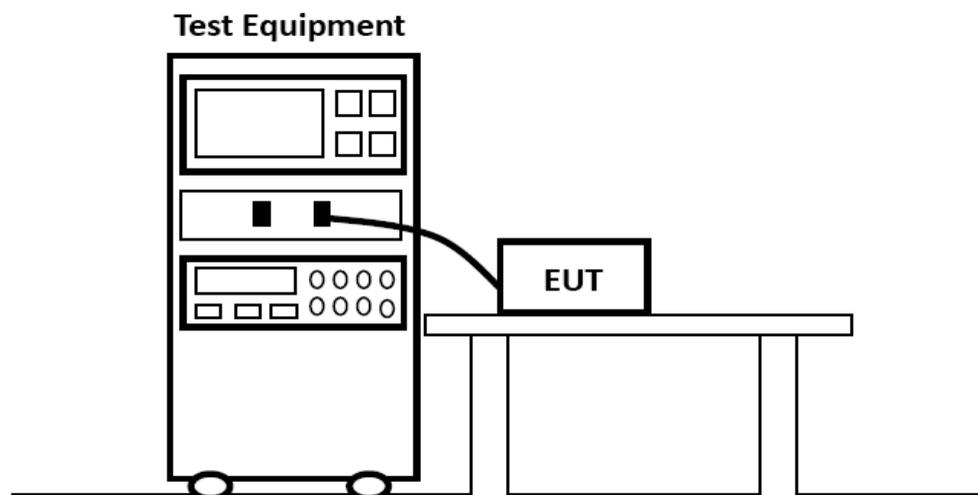

5.4.2. Test Standard

EN 61000-3-2: 2014

5.4.3. Operating Condition of EUT

Same as Section 5.3.4, except the test setup replaced as Section 5.4.1.


5.4.4. Test Results

N/A

Because the power of EUT is less than 75W, according to standard EN 61000-3-2, harmonic current is unnecessary to test.

5.5. VOLTAGE FLUCTUATION AND FLICKER MEASUREMENT

5.5.1. Block Diagram of Test Setup

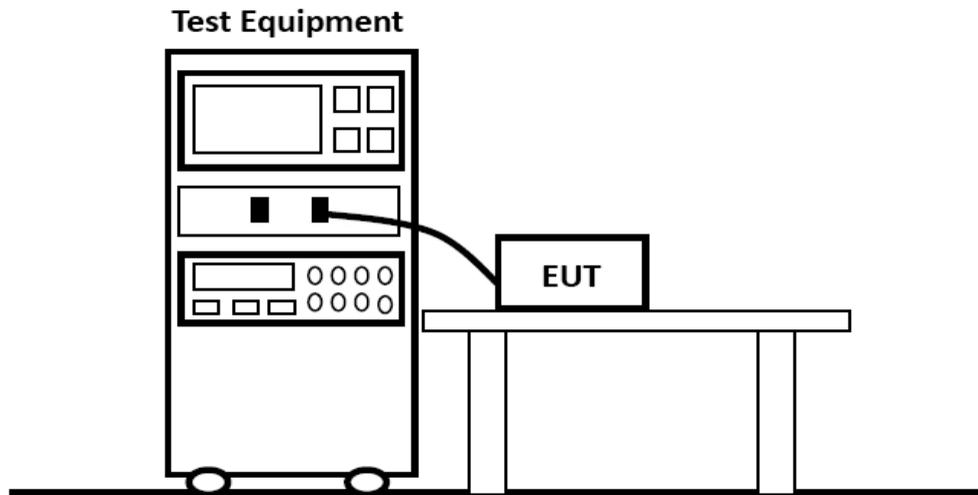

5.5.2. Test Standard

EN 61000-3-3: 2013

5.5.3. Operating Condition of EUT

Same as Section 5.3.4, except the test setup replaced as Section 5.5.1.


5.5.4. Test Results

PASS.

Test Model	BI602PG2F	Test Engineer	Jay Li	
Test Voltage	AC 230V/50Hz			
Overall Result: PASS	Notes: Measurement method - Voltage			
	Pst	dc (%)	dmax (%)	d(t) > 3.3%(ms)
Limit	1.000	3.300	4.000	500
Reading 1	0.089	0.008	0.125	0

5.6. ELECTROSTATIC DISCHARGE IMMUNITY TEST

5.6.1. Block Diagram of Test Setup

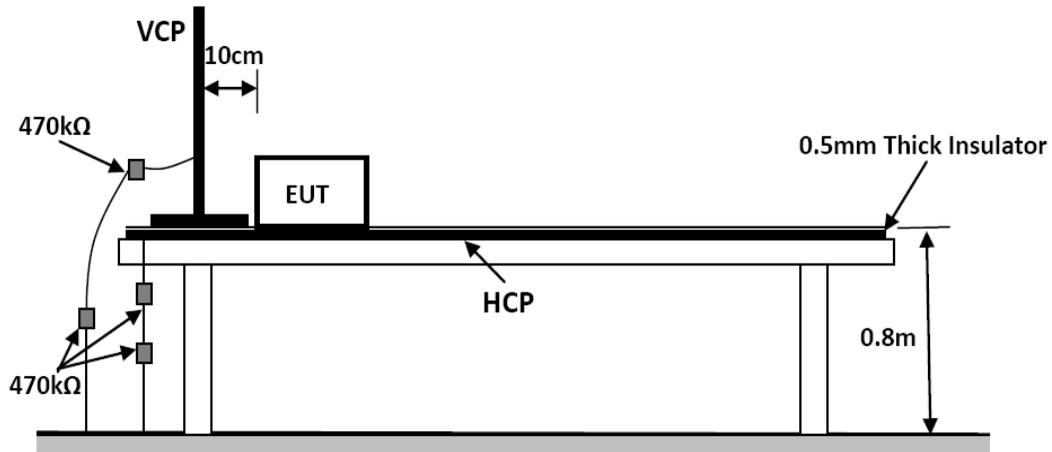

5.6.2. Test Standard

EN 55035: 2017 (EN 61000-4-2: 2009, Severity Level: 3 / Air Discharge: $\pm 8\text{KV}$, Level: 2 / Contact Discharge: $\pm 4\text{KV}$)

5.6.3. Severity Levels and Performance Criterion

5.6.3.1. Severity level

Level	Test Voltage Contact Discharge (KV)	Test Voltage Air Discharge (KV)
1	± 2	± 2
2	± 4	± 4
3	± 6	± 8
4	± 8	± 15
X	Special	Special

5.6.3.2. Performance Criterion

Performance Criterion: B

5.6.4. EUT Configuration on Test

The configuration of EUT is listed in Section 5.6.1.

5.6.5. Operating Condition of EUT

Same as conducted emission measurement, which is listed in Section 5.1.4. Except the test set up replaced by Section 5.6.1.

5.6.6. Test Procedure

5.5.6.1. Air Discharge

This test is done on a non-conductive surface. The round discharge tip of the discharge electrode shall be approached as fast as possible to touch the EUT. After each discharge, the discharge electrode shall be removed from the EUT. The generator is then re-triggered for a new single discharge and repeated 10 times for each pre-selected test point. This procedure shall be repeated until all the air discharge completed

5.5.6.2. Contact Discharge

All the procedure shall be same as Section 5.5.6.1. Except that the tip of the discharge electrode shall touch the EUT before the discharge switch is operated.

5.5.6.3. Indirect Discharge For Horizontal Coupling Plane

At least 10 single discharges (in the most sensitive polarity) shall be applied at the front edge of each HCP opposite the center point of each unit (if applicable) of the EUT and 0.1m from the front of the EUT. The long axis of the discharge electrode shall be in the plane of the HCP and perpendicular to its front edge during the discharge.

5.5.6.4. Indirect Discharge For Vertical Coupling Plane

At least 10 single discharge (in the most sensitive polarity) shall be applied to the center of one vertical edge of the coupling plane. The coupling plane, of dimensions 0.5m X 0.5m, is placed parallel to, and positioned at a distance of 0.1m from the EUT. Discharges shall be applied to the coupling plane, with this plane in sufficient different positions that the four faces of the EUT are completely illuminated.

5.6.7. Test Results

PASS.

The test result please refer to the next page.

Electrostatic Discharge Test Results

Standard	<input type="checkbox"/> IEC 61000-4-2 <input checked="" type="checkbox"/> EN 61000-4-2		
Applicant	BORN ELECTRONICS LIMITED		
EUT	POE switch	Temperature	22.6°C
M/N	BI602PG2F	Humidity	54.6%
Criterion	B	Pressure	1021mbar
Test Mode	Mode 1	Test Engineer	Jay Li

Air Discharge						
Test Points	Test Levels			Results		
	± 2kV	± 4kV	± 8kV	Passed	Fail	Performance Criterion
Front	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/> A <input checked="" type="checkbox"/> B
Back	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/> A <input checked="" type="checkbox"/> B
Left	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/> A <input checked="" type="checkbox"/> B
Right	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/> A <input checked="" type="checkbox"/> B
Top	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/> A <input checked="" type="checkbox"/> B
Bottom	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/> A <input checked="" type="checkbox"/> B


Contact Discharge						
Test Points	Test Levels		Results			
	± 2 kV	± 4 kV	Passed	Fail	Performance Criterion	
Front	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/> A <input checked="" type="checkbox"/> B	
Back	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/> A <input checked="" type="checkbox"/> B	
Left	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/> A <input checked="" type="checkbox"/> B	
Right	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/> A <input checked="" type="checkbox"/> B	
Top	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/> A <input checked="" type="checkbox"/> B	
Bottom	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/> A <input checked="" type="checkbox"/> B	

Discharge To Horizontal Coupling Plane						
Side of EUT	Test Levels		Results			
	± 2 kV	± 4 kV	Passed	Fail	Performance Criterion	
Front	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/> A <input checked="" type="checkbox"/> B	
Back	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/> A <input checked="" type="checkbox"/> B	
Left	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/> A <input checked="" type="checkbox"/> B	
Right	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/> A <input checked="" type="checkbox"/> B	

Discharge To Vertical Coupling Plane						
Side of EUT	Test Levels		Results			
	± 2 kV	± 4 kV	Passed	Fail	Performance Criterion	
Front	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/> A <input checked="" type="checkbox"/> B	
Back	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/> A <input checked="" type="checkbox"/> B	
Left	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/> A <input checked="" type="checkbox"/> B	
Right	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/> A <input checked="" type="checkbox"/> B	

5.7. RF FIELD STRENGTH SUSCEPTIBILITY TEST

5.7.1. Block Diagram of Test Setup

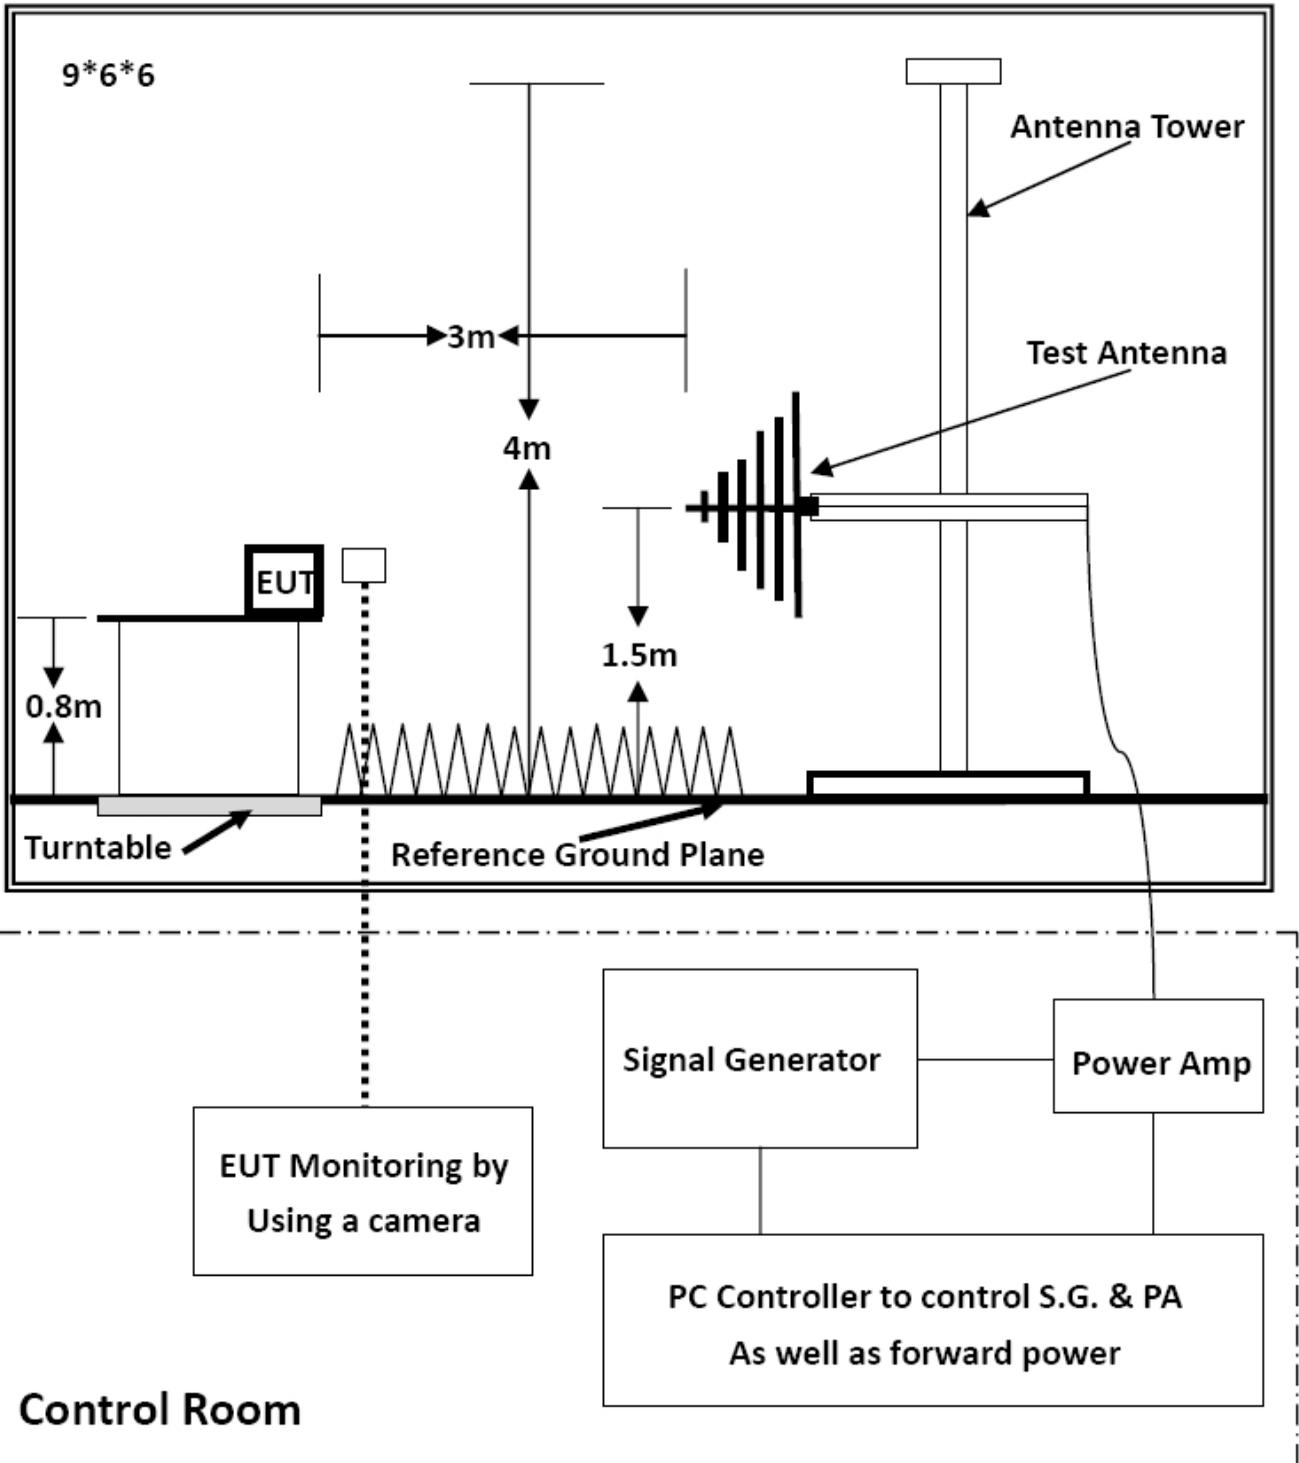

5.7.2. Test Standard

EN 55035: 2017 (EN 61000-4-3: 2006+A2: 2010 Severity Level: 2, 3V/m)

5.7.3. Severity Levels and Performance Criterion

5.7.3.1. Severity level

Level	Field Strength (V/m)
1	1
2	3
3	10
X	1

5.7.3.2. Performance Criterion

Performance Criterion: A

5.7.4. EUT Configuration on Test

The configuration of EUT is listed in Section 5.7.1

5.7.5. Operating Condition of EUT

Same as radiated emission measurement, which is listed in Section 5.3.4, except the test setup replaced as Section 5.7.1.

5.7.6. Test Procedure

The EUT are placed on a table, which is 0.8 meter high above the ground. The EUT is set 3 meters away from the transmitting antenna, which is mounted on an antenna tower. Both horizontal and vertical polarization of the antenna is set on test. Each of the four sides of the EUT must be faced this transmitting antenna and measured individually. In order to judge the EUT performance, a CCD Recording is used to monitor its screen. All the scanning conditions are as following:

Condition of Test	Remark
Fielded Strength	3 V/m (Severity Level 2)
Radiated Signal	Unmodulated
Test Frequency Range (swept test)	80-1000MHz
Test Frequency (spot test)	1800MHz, 2600MHz, 3500MHz, 5000MHz
Dwell time of radiated	0.0015 decade/s
Waiting Time	3 Sec.

5.7.7. Test Results

PASS.

The test result please refer to the next page.

RF Field Strength Susceptibility Test Results

Standard	<input type="checkbox"/> IEC 61000-4-3 <input checked="" type="checkbox"/> EN 61000-4-3		
Applicant	BORN ELECTRONICS LIMITED		
EUT	POE switch	Temperature	23.8°C
M/N	BI602PG2F	Humidity	54.3%
Field Strength	3 V/m	Criterion	A
Test Mode	Mode 1	Test Engineer	Jay Li
Test Frequency	80MHz to 1000MHz (swept test) 1800MHz, 2600MHz, 3500MHz, 5000MHz (spot test)		
Modulation	<input type="checkbox"/> None <input type="checkbox"/> Pulse <input checked="" type="checkbox"/> AM 1KHz 80%		
Steps	1%		

	Horizontal	Vertical
Front	PASS	PASS
Right	PASS	PASS
Rear	PASS	PASS
Left	PASS	PASS


Test Equipment:

1. Signal Generator: 2031 (MARCONI)
2. Power Amplifier: 500A100 & 100W/1000M1 (A&R)
3. Power Antenna: 3108 (EMCO) & AT1080 (A&R)
4. Field Monitor: FM2000 (A&R)

Note:

5.8. ELECTRICAL FAST TRANSIENT/BURST IMMUNITY TEST

5.8.1. Block Diagram of Test Setup

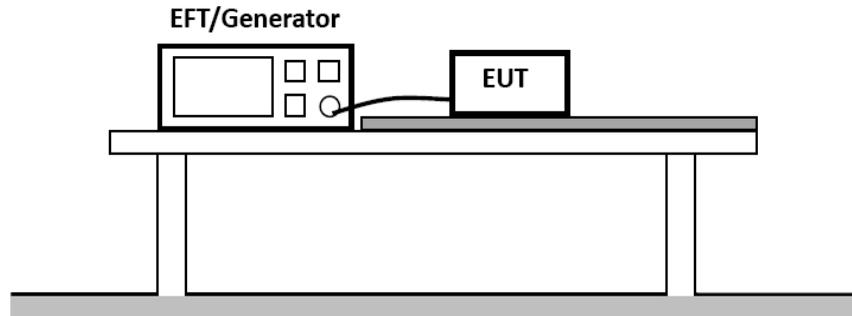

5.8.2. Test Standard

EN 55035: 2017 (EN 61000-4-4: 2012, Severity Level, Level 2: 1KV)

5.8.3. Severity Levels and Performance Criterion

5.8.3.1. Severity level

Open Circuit Output Test Voltage $\pm 10\%$		
Level	On Power Supply Lines	On I/O (Input/Output) Signal data and control lines
1	0.5 KV	0.25 KV
2	1 KV	0.5 KV
3	2 KV	1 KV
4	4 KV	2 KV
X	Special	Special

5.8.3.2. Performance Criterion

Performance Criterion: B

5.8.4. EUT Configuration on Test

The configuration of EUT is listed in Section 5.8.1

5.8.5. Operating Condition of EUT

5.8.5.1. Setup the EUT as shown in Section 5.8.1.

5.8.5.2. Turn on the power of all equipments.

5.8.5.3. Let the EUT work in test Mode 1 and measure it.

5.8.6. Test Procedure

The EUT is put on the table, which is 0.8 meter high above the ground. This reference ground plane shall project beyond the EUT by at least 0.1m on all sides and the minimum distance between EUT and all other conductive structure, except the ground plane beneath the EUT, shall be more than 0.5m.

5.8.6.1. For input and output AC power ports:

The EUT is connected to the power mains by using a coupling device, which couples the EFT interference signal to AC power lines. Both polarities of the test voltage should be applied during compliance test and the duration of the test is 2 mins.

5.8.6.2. For signal lines and control lines ports:

It's unnecessary to test.

5.8.6.3. For DC output line ports:

It's unnecessary to test.

5.8.7. Test Results

PASS.

The test result please refer to the next page.

Electrical Fast Transient/Burst Test Results


Standard	<input type="checkbox"/> IEC 61000-4-4 <input checked="" type="checkbox"/> EN 61000-4-4		
Applicant	BORN ELECTRONICS LIMITED		
EUT	POE switch	Temperature	22.6°C
M/N	BI602PG2F	Humidity	54.6%
Test Mode	Mode 1	Criterion	B
Test Engineer	Jay Li		

Line	Test Voltage	Result (+)	Result (-)
L	1KV	PASS	PASS
N	1KV	PASS	PASS
PE			
L-N	1KV	PASS	PASS
L-PE			
N-PE			
L-N-PE			
Signal Line			
I/O Cable			

Note:

5.9. SURGE IMMUNITY TEST

5.9.1. Block Diagram of Test Setup

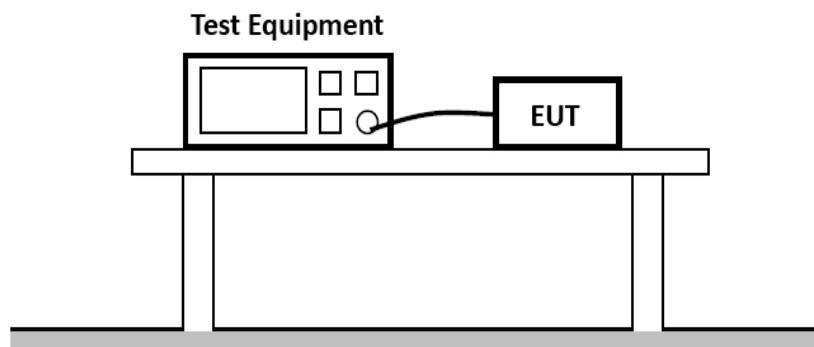

5.9.2. Test Standard

EN 55035: 2017 (EN 61000-4-5: 2014+A1: 2017, Severity Level: Line to Line: Level 2, 1.0KV, Line to Earth: Level 3, 2.0KV)

5.9.3. Severity Levels and Performance Criterion

5.9.3.1. Severity level

Severity Level	Open-Circuit Test Voltage (KV)
1	0.5
2	1.0
3	2.0
4	4.0
*	Special

5.9.3.2. Performance Criterion

Performance Criterion: B

5.9.4. EUT Configuration on Test

The configuration of EUT is listed in Section 5.9.1

5.9.5. Operating Condition of EUT

5.9.5.1. Setup the EUT as shown in Section 5.9.1.

5.9.5.1. Turn on the power of all equipments.

5.9.5.1. Let the EUT work in test mode and measure it.

5.9.6. Test Procedure

5.9.6.1. Set up the EUT and test generator as shown on Section 5.9.1.

5.9.6.2. For line to line coupling mode, provide a 1.0 KV 1.2/50us voltage surge (at open-circuit condition) and 8/20us current surge to EUT selected points.

5.9.6.3. At least 5 positive and 5 negative (polarity) tests with a maximum 1/min repetition rate are conducted during test.

5.9.6.4. Different phase angles are done individually.

5.9.6.5. Record the EUT operating situation during compliance test and decide the EUT immunity criterion for above each test.

5.9.7. Test Results

PASS.

The test result please refer to the next page.

Surge Immunity Test Result


Standard	<input type="checkbox"/> IEC 61000-4-5 <input checked="" type="checkbox"/> EN 61000-4-5		
Applicant	BORN ELECTRONICS LIMITED		
EUT	POE switch	Temperature	22.6°C
M/N	BI602PG2F	Humidity	54.6%
Test Mode	Mode 1	Criterion	B
Test Engineer	Jay Li		

Location	Polarity	Phase Angle	Number of Pulse	Pulse Voltage (KV)	Result
L-N	+	0°, 90°, 180°, 270°	5	1.0	PASS
	-	0°, 90°, 180°, 270°	5	1.0	PASS
L-PE					
N-PE					
Signal Line					

Note	
------	--

5.10. INJECTED CURRENTS SUSCEPTIBILITY TEST

5.10.1. Block Diagram of Test Setup

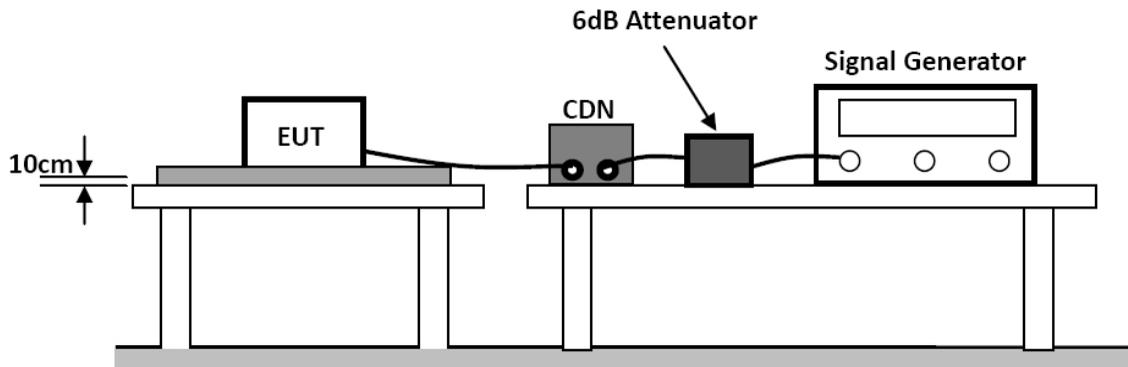

5.10.2. Test Standard

EN 55035: 2017(EN 61000-4-6: 2014, Severity Level: Level 2, (0.15MHz ~ 80MHz))

5.10.3. Severity Levels and Performance Criterion

5.10.3.1. Severity level

Level	Field Strength (V)
1	1
2	3
3	10
X	Special

5.10.3.2. Performance Criterion

Performance Criterion: A

5.10.4. EUT Configuration on Test

The configuration of EUT is listed in Section 5.10.1

5.10.5. Operating Condition of EUT

5.10.5.1. Setup the EUT as shown in Section 5.10.1.

5.10.5.2. Turn on the power of all equipments.

5.10.5.3. Let the EUT work in test Mode 1 and measure it.

5.10.6. Test Procedure

5.10.6.1. Set up the EUT, CDN and test generators as shown on Section 5.10.1.

5.10.6.2. Let the EUT work in test mode and measure it.

5.10.6.3. The EUT are placed on an insulating support 0.1m high above a ground reference plane. CDN (coupling and decoupling device) is placed on the ground plane about 0.3m from EUT. Cables between CDN and EUT are as short as possible, and their height above the ground reference plane shall be between 30 and 50 mm (where possible).

5.10.6.4. The disturbance signal described below is injected to EUT through CDN.

5.10.6.5. The EUT operates within its operational mode(s) under intended climatic conditions after power on.

5.10.6.6. The frequency range is swept from 150kHz to 10MHz using 3V signal level, 10MHz to 30MHz using 3V to 1V signal level, 30MHz to 80MHz using 1V signal level, and with the disturbance signal 80% amplitude modulated with a 1kHz sine wave.

5.10.6.7. The rate of sweep shall not exceed 1.5×10^{-3} decades/s. where the frequency is swept incrementally; the step size shall not exceed 1% of the start and thereafter 1% of the preceding frequency value.

5.10.6.8. Recording the EUT operating situation during compliance testing and decide the EUT immunity criterion.

5.10.7. Test Results

PASS.

The test result please refer to the next page.

Injected Currents Susceptibility Test Results

Standard	<input type="checkbox"/> IEC 61000-4-6 <input checked="" type="checkbox"/> EN 61000-4-6		
Applicant	BORN ELECTRONICS LIMITED		
EUT	POE switch	Temperature	24.1°C
M/N	BI602PG2F	Humidity	53.1%
Test Mode	Mode 1	Criterion	A
Test Engineer	Jay Li		

Frequency Range (MHz)	Injected Position	Strength (Unmodulated)	Criterion	Result
0.15 ~ 10	AC Mains	3V	A	PASS
10 ~ 30		3V ~ 1V		
30 ~ 80		1V		


Remark:

1. Modulation Signal: 1kHz 80% AM
2. Measurement Equipment :
 - Simulator: CIT-10 (FRANKONIA)
 - CDN : CDN-M2 (FRANKONIA)
 - CDN-M3 (FRANKONIA)

Note:

5.11. MAGNETIC FIELD SUSCEPTIBILITY TEST

5.11.1. Block Diagram of Test Setup

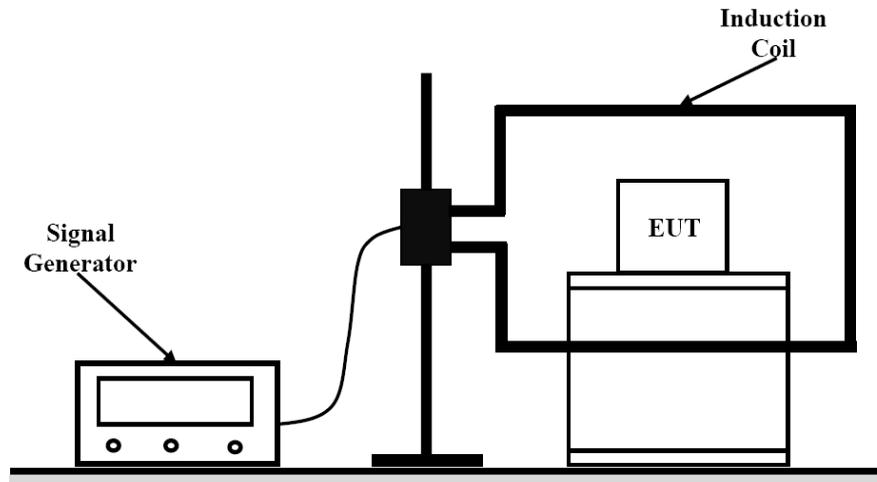

5.11.2. Test Standard

EN 55035: 2017 (EN 61000-4-8: 2010, Severity Level: Level 1, 1A/m)

5.11.3. Severity Levels and Performance Criterion

5.11.3.1. Severity level

Level	Field Strength (A/m)
1	1
2	3
3	10
4	30
5	100
X	Special

5.11.3.2. Performance Criterion

Performance Criterion: A

5.11.4. EUT Configuration on Test

The configuration of EUT is listed in Section 5.11.1

5.11.5. Test Procedure

The EUT is placed in the middle of a induction coil (1*1m), under which is a 1*1*0.1m (high) table, this small table is also placed on a larger table, 0.8 m above the ground. Both horizontal and vertical polarization of the induction coil is set on test, so that each side of the EUT is affected by the magnetic field. Also can reach the same aim by change the position of the EUT.

5.11.6. Test Results

PASS.

The test result please refer to the next page.

Magnetic Field Immunity Test Result


Standard	<input type="checkbox"/> IEC 61000-4-8 <input checked="" type="checkbox"/> EN 61000-4-8		
Applicant	BORN ELECTRONICS LIMITED		
EUT	POE switch	Temperature	22.6°C
M/N	BI602PG2F	Humidity	54.6%
Test Mode	Mode 1	Criterion	A
Test Engineer	Jay Li		

Test Level (A/M)	Testing Duration	Coil Orientation	Criterion	Result
1	5 mins	X	A	PASS
1	5 mins	Y	A	PASS
1	5 mins	Z	A	PASS

Note:

5.12. VOLTAGE DIPS AND INTERRUPTIONS TEST

5.12.1. Block Diagram of Test Setup

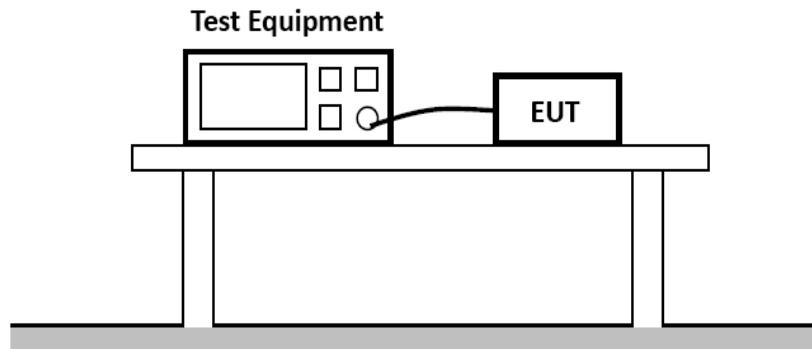

5.12.2. Test Standard

EN 55035: 2017 (EN 61000-4-11: 2004+A1: 2017)

5.12.3. Severity Levels and Performance Criterion

5.12.3.1. Severity level

Test Level		
Voltage Reduction %U _T	Voltage Dips %U _T	Duration (in Period)
100	0	0.5
100	0	1
30	70	5
Voltage Reduction %U _T	Voltage Dips %U _T	Duration (in Period)
100	0	250

5.12.3.2. Performance Criterion

Performance Criterion: B&C

5.12.4. EUT Configuration on Test

The configuration of EUT is listed in Section 5.12.1

5.12.5. Operating Condition of EUT

5.12.5.1. Setup the EUT as shown in Section 5.12.1.

5.12.5.2. Turn on the power of all equipments.

5.12.5.3. Let the EUT work in test mode and measure it.

5.12.6. Test Procedure

5.12.6.1. Set up the EUT and test generator as shown on Section 5.12.1.

5.12.6.2. The interruptions are introduced at selected phase angles with specified duration.

5.12.6.3. Record any degradation of performance.

5.12.7. Test Results

PASS.

The test result please refer to the next page.

Voltage Dips And Interruptions Test Results

Standard	<input type="checkbox"/> IEC 61000-4-11 <input checked="" type="checkbox"/> EN 61000-4-11		
Applicant	BORN ELECTRONICS LIMITED		
EUT	POE switch	Temperature	22.6°C
M/N	BI602PG2F	Humidity	54.6%
Test Mode	Mode 1	Criterion	B&C
Test Engineer	Jay Li		

Test Level % U _T	Voltage Dips & Short Interruptions % U _T	Duration (in periods)	Criterion	Result
0	100	0.5P	B	PASS
70	30	25P	C	PASS
0	100	250P	C	PASS

Note:

6. PHOTOGRAPHS OF TEST SETUP



Test Setup Photo of Power Line Conducted Measurement



Test Setup Photo of Power Line Conducted Measurement



Test Setup Photo of Radiated Measurement (30MHz~1GHz)




Test Setup Photo of Harmonic & Flicker Measurement



Test Setup Photo of Electrostatic Discharge Test




Photo of Electrical Fast Transient/Burst Test & Surge Immunity Test

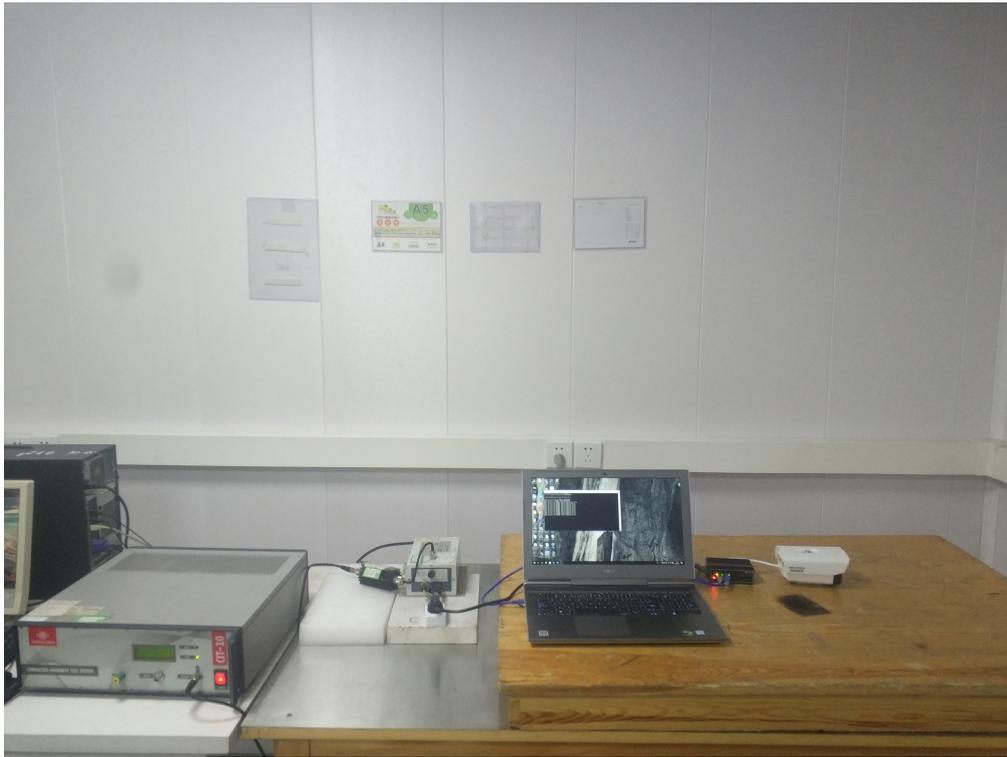

Test Setup Photo of Injected Currents Susceptibility Test



Test Setup Photo of Magnetic Field Immunity Test

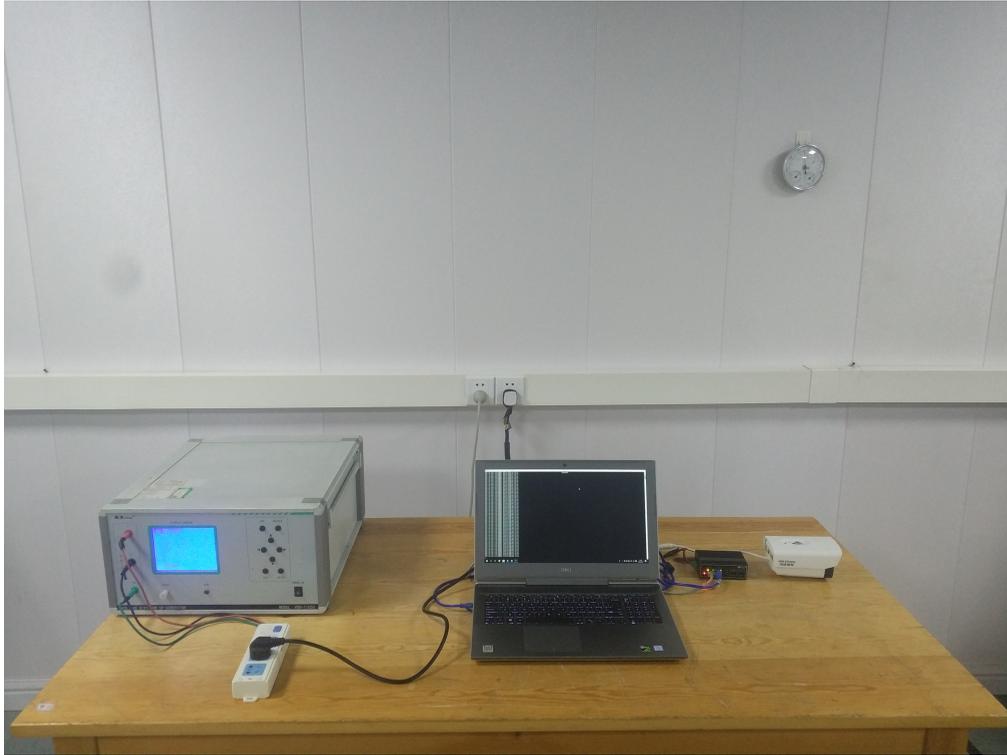

Test Setup Photo of Voltage Dips and Interruptions Test

7. PHOTOGRAPHS OF THE EUT

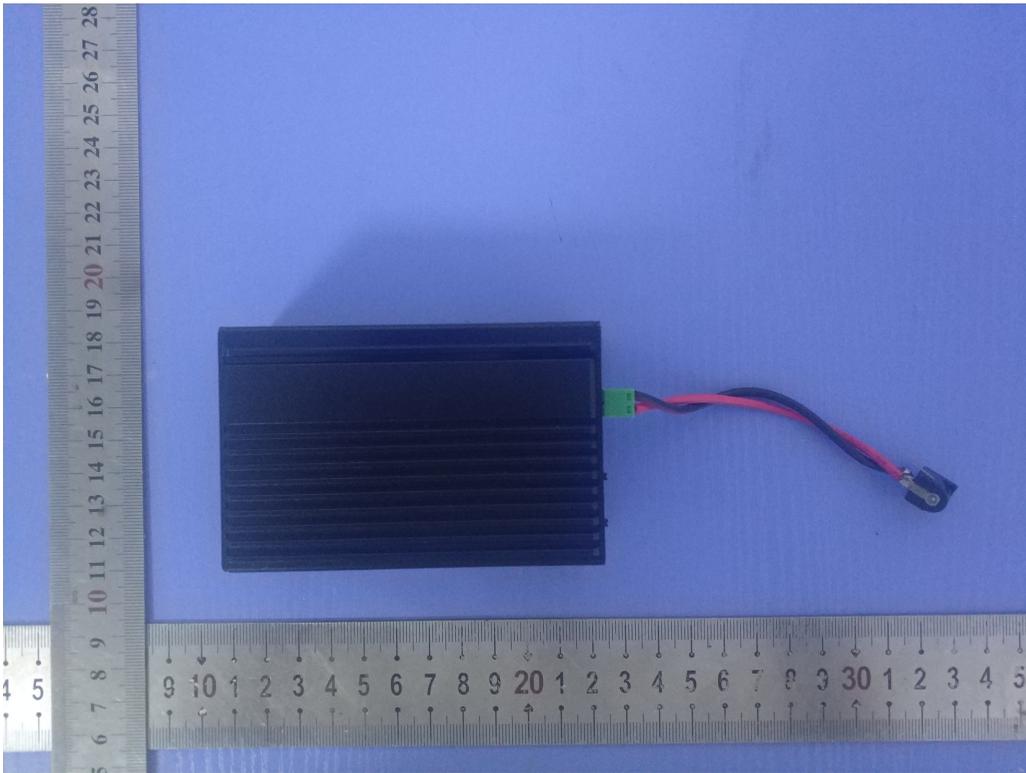


Fig. 1

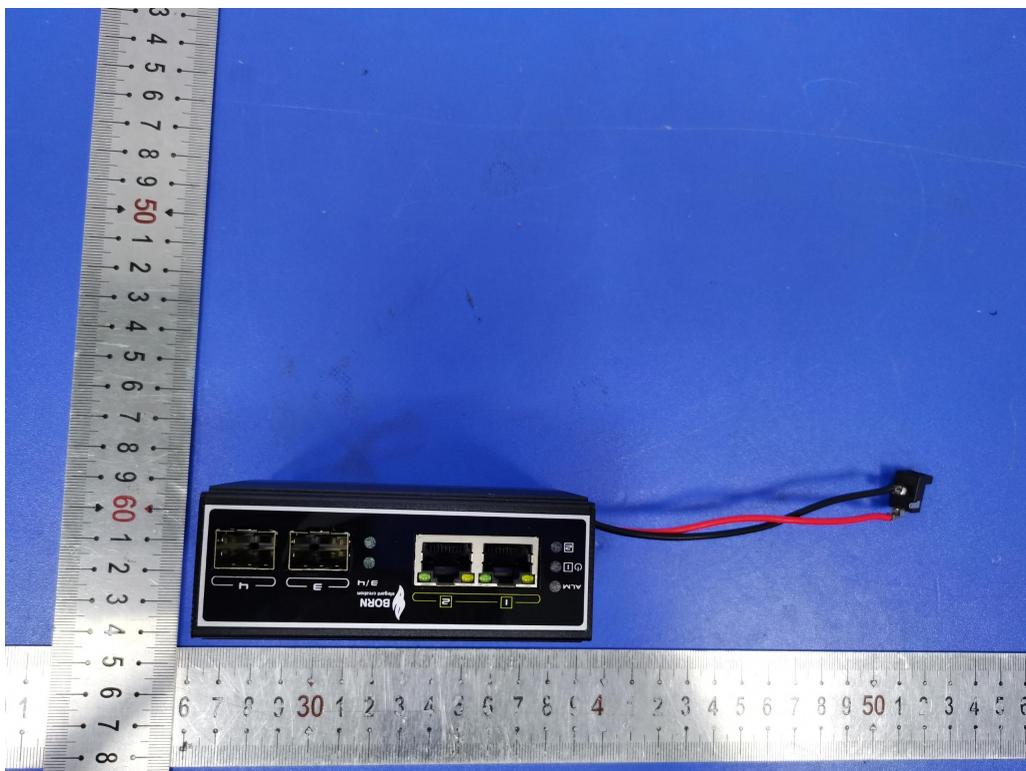


Fig. 2

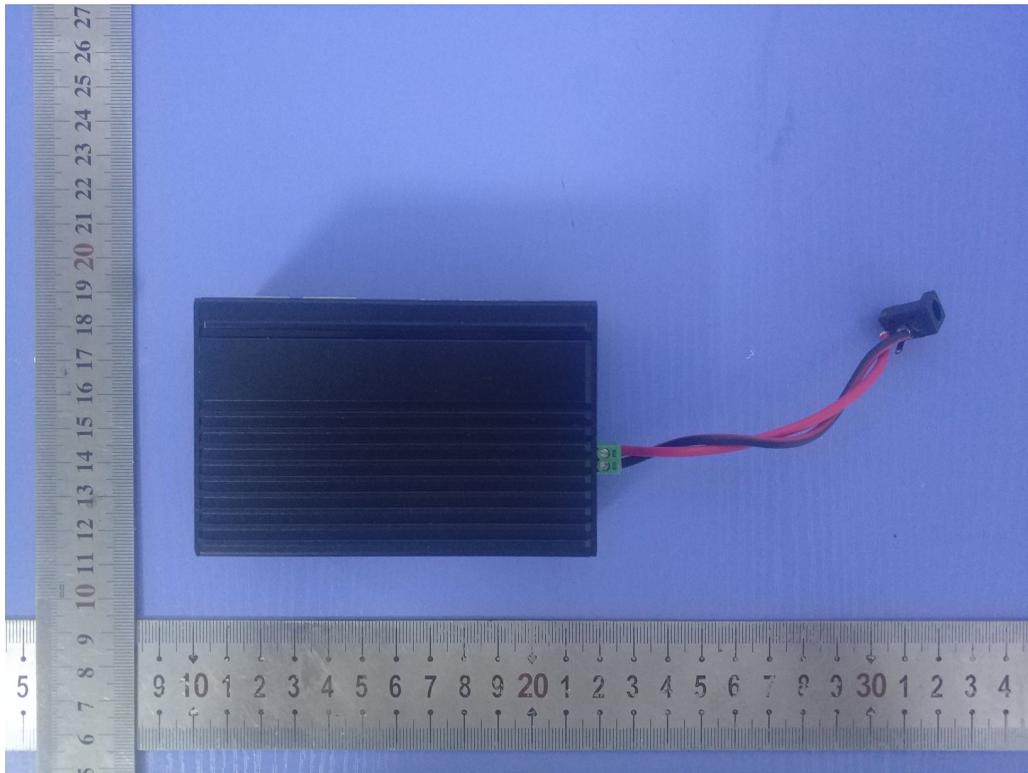


Fig. 3

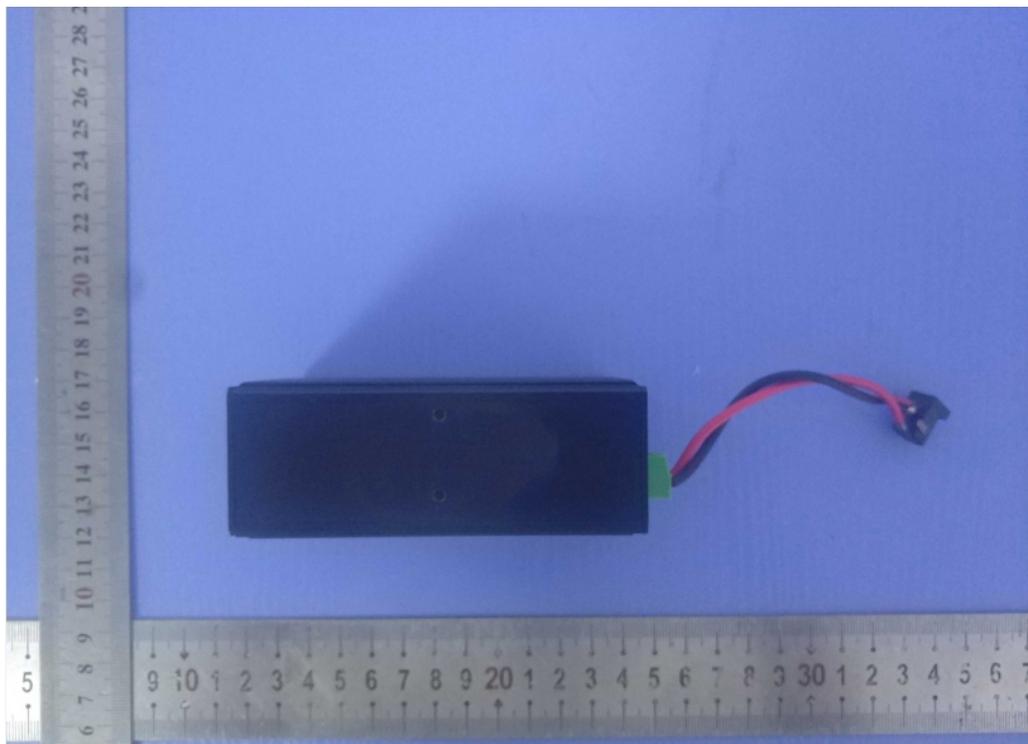


Fig. 4

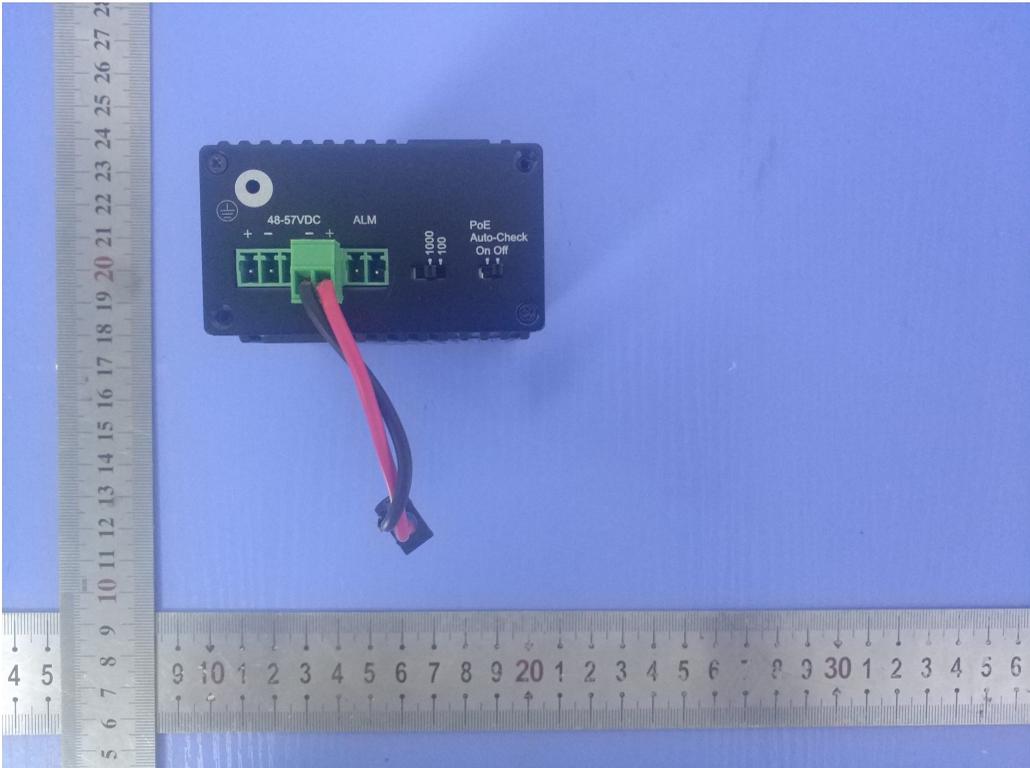


Fig. 5

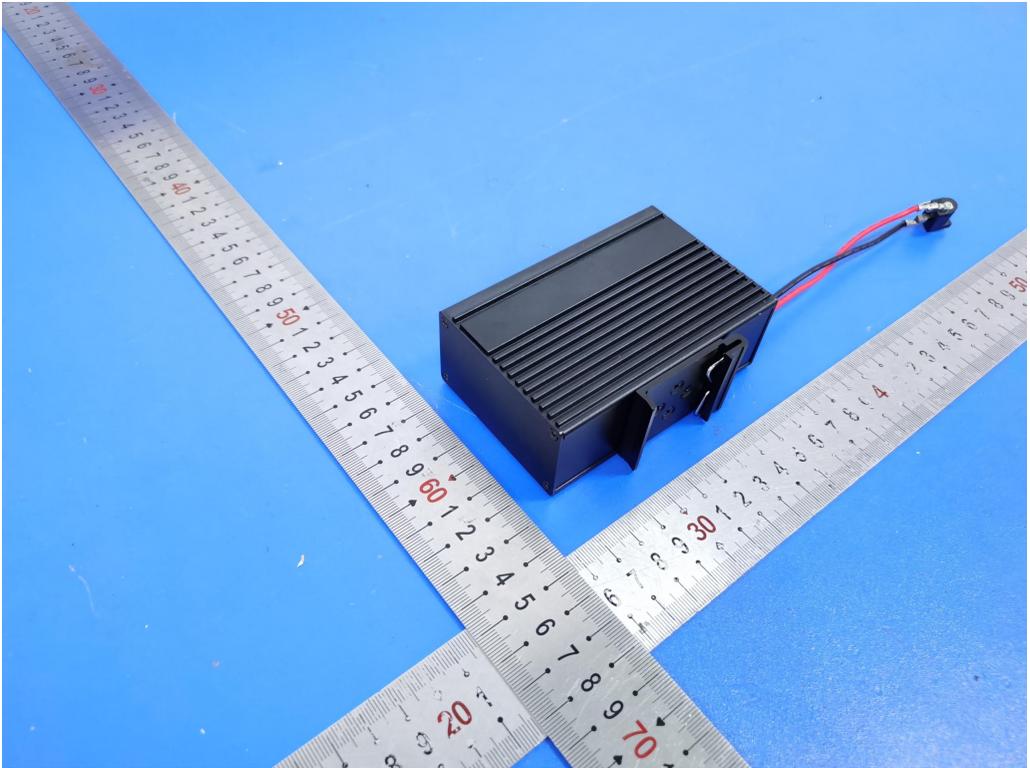


Fig. 6

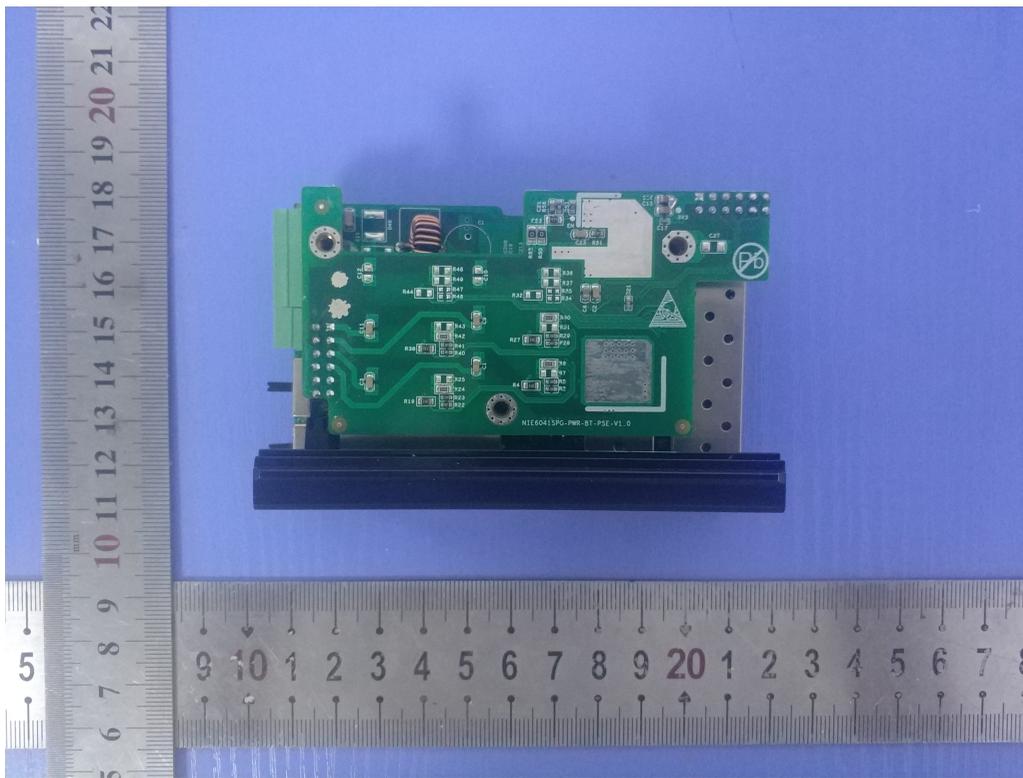


Fig. 7

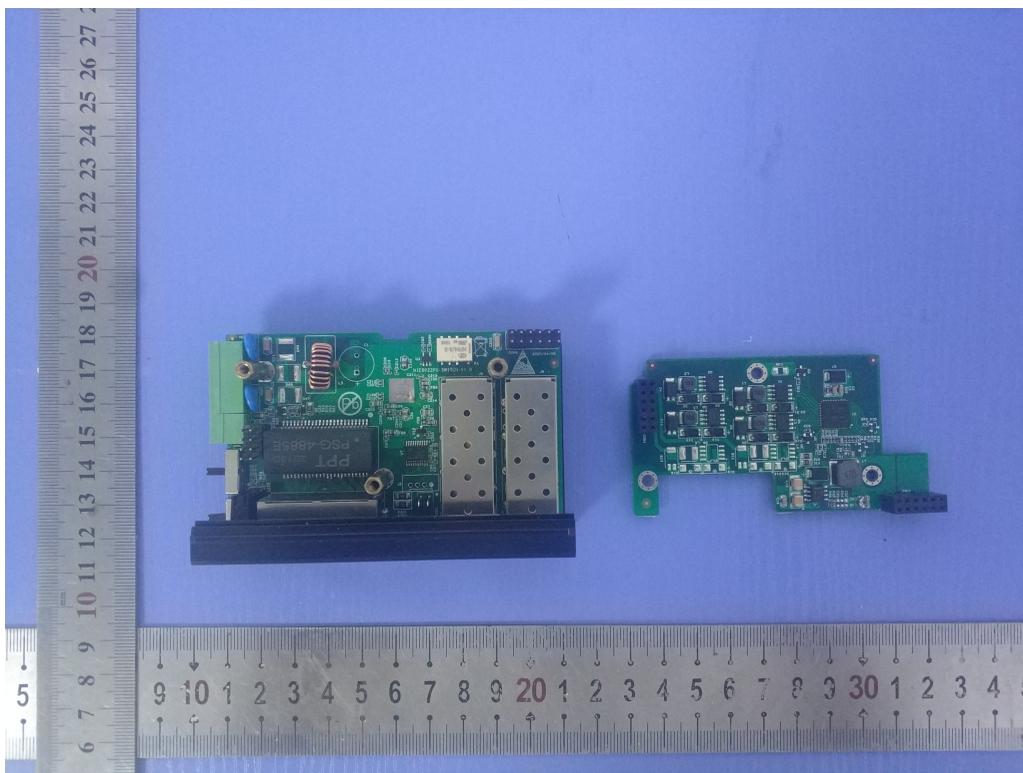


Fig. 8

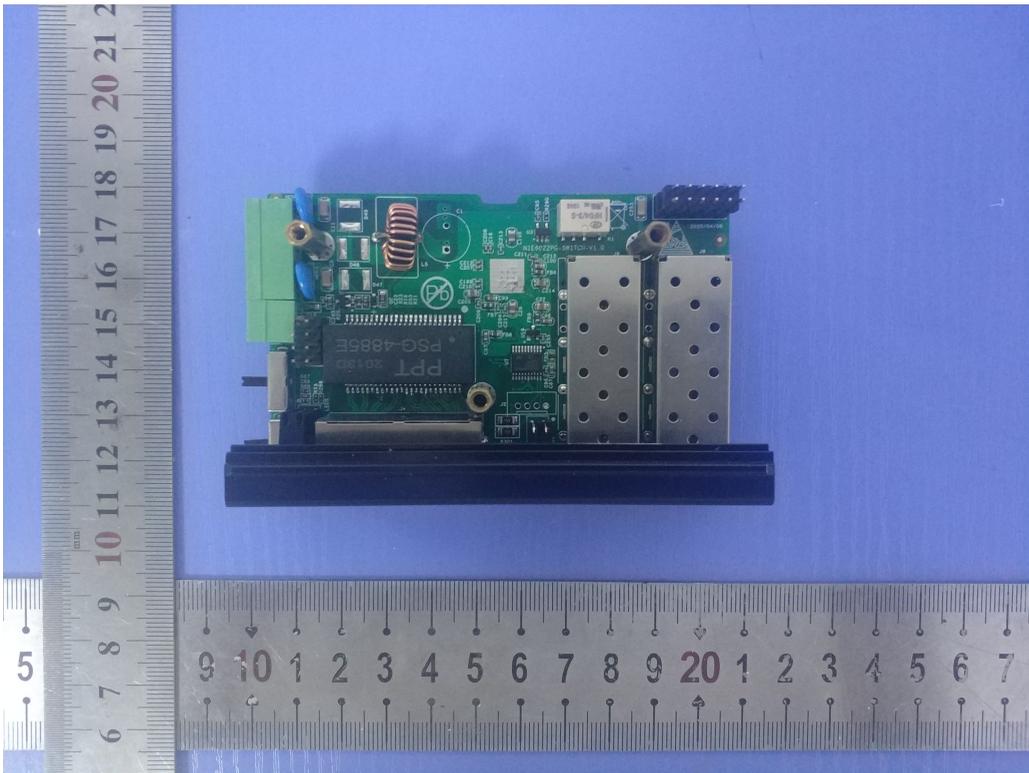


Fig. 9

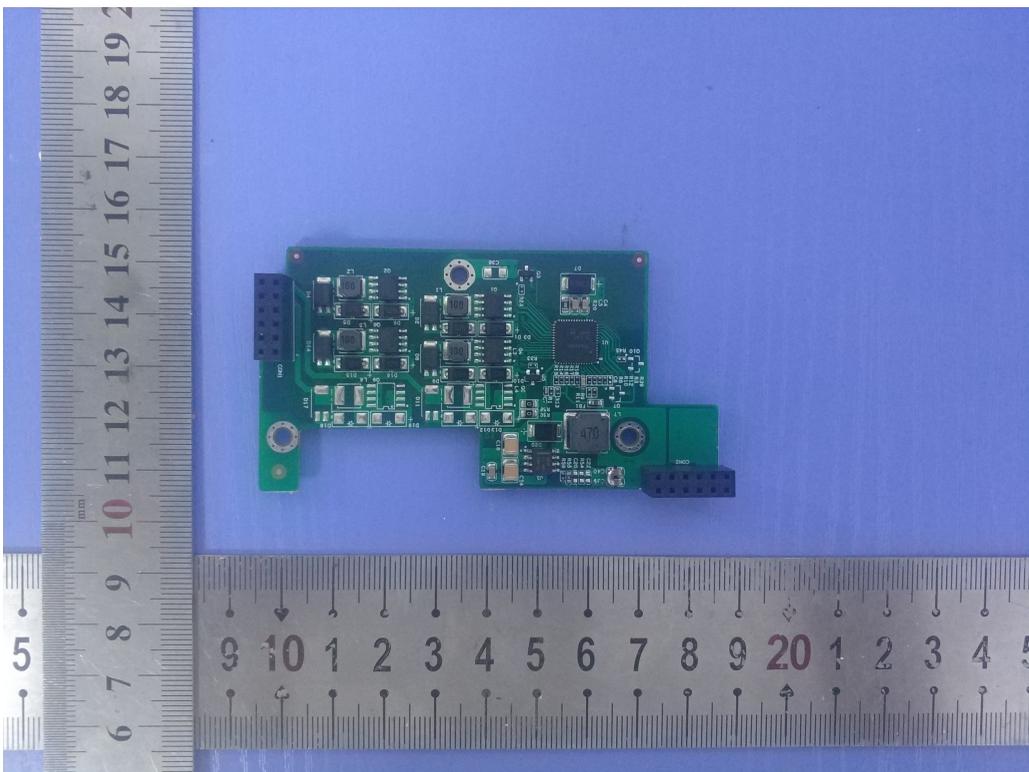


Fig. 10

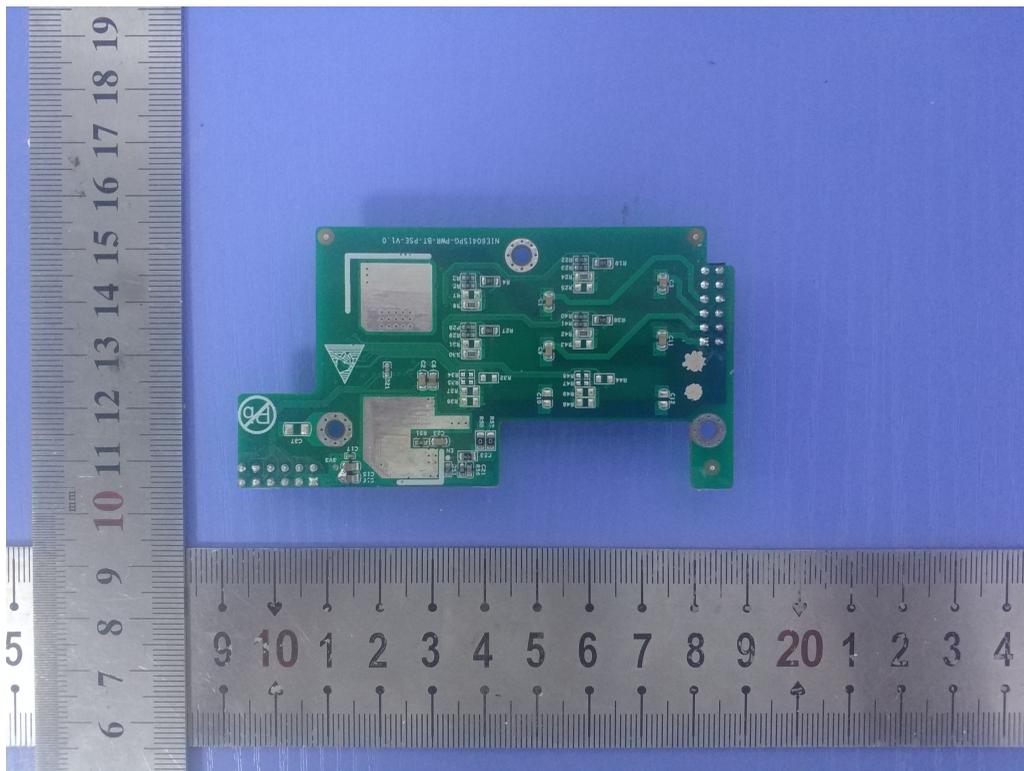


Fig. 11

----- THE END OF TEST REPORT -----