

BI8124PGM4F-400WS

28-Port Gigabit Managed Industrial PoE Switch

Datasheet



Product Datasheet

28-port Gigabit Managed Industrial PoE Switch

(BI8124PGM4F-400WS)



OVERVIEW

The BI8124PGM4F-400WS is a Gigabit managed industrial PoE fiber switch. It has 24*10/100/1000Base-T adaptive RJ45 ports and 4*100/1000Base-X uplink SFP fiber ports. Port 1-24 can support IEEE 802.3 af/at PoE standard and the single-port PoE power reaches 30W. As a PoE power supply device, it can automatically detect and recognize the power-receiving equipment that meets the standard and supply power through the network cable. It can supply power to PoE terminal equipment such as wireless AP, IP cameras, VoIP phones, and industrial sensors through a network cable, and meet the network environment that needs a high-density PoE power supply. It is suitable for intelligent transportation, rail transit, electric power, mining, metallurgy, and green energy, industrial scenes such as construction setting up a cost-effective and stable communication network.

The BI8124PGM4F-400WS L2+ network management functions. It can support IPV4 management and static routing forwarding, complete security protection mechanisms, complete ACL/ QoS policies, and rich VLAN functions, making it easy to manage and maintain. Supports multiple network redundancy protocols RSTP (<50ms) to improve link backup and network reliability. When a one-way network fails, communication can be quickly restored to ensure

BI8124PGM4F-400WS

28-Port Gigabit Managed Industrial PoE Switch

Datasheet



supply management, port flow control, VLAN division, QoS, and other application service configurations can be performed through network management methods such as Web, CLI, SNMP, and Telnet.

FEATURE

■ Gigabit access

- ◇ Support non-blocking wire-speed forwarding.
- ◇ Support full-duplex based on IEEE 802.3x and half-duplex based on Backpressure.
- ◇ Support Gigabit RJ45 port and SFP fiber port combination, which enables users to flexibly build networking to meet the needs of various scenarios.

■ Smart PoE power supply

- ◇ Comply with IEEE 802.3 af/at PoE power supply standard, automatically identify PoE equipment for power supply.
- ◇ Support PoE network management function, port power status viewing, etc. through network management configuration.
- ◇ 24*10/100/1000Base-T RJ45 ports support PoE power, meeting the PoE power requirements of security monitoring, industrial automation systems, wireless coverage, and other scenarios.

■ Strong business processing capability

- ◇ Support IEEE 802.1Q VLAN.
- ◇ Ring network RSTP spanning tree protocol eliminates layer 2 loops and realizes link backup.
- ◇ Support IGMP Snooping V1/V2 to meet the needs of multi-terminal high-definition video surveillance and video conferencing access.
- ◇ Support QoS, three priority modes based on port, 802.1P-based and DSCP-based, and four queue scheduling algorithms: SP, WRR, and WFQ.
- ◇ Static aggregation and dynamic aggregation effectively increase link bandwidth, achieve load balancing, and link

BI8124PGM4F-400WS

28-Port Gigabit Managed Industrial PoE Switch

Datasheet



backup, and improve link reliability.

- ◇ Support ACL to filter data packets by configuring matching rules, processing operations, and time permissions to provide flexible security access control strategies.

■ Security

- ◇ Port isolation and storm control.
- ◇ 802.1X authentication provides authentication functions for LAN computers and controls the authorization status of controlled ports according to the authentication results.

■ Stable and reliable

- ◇ CCC, CE, FCC, RoHS.
- ◇ The user-friendly panel can show the device status through the LED indicator of PWR, Link, and PoE.
- ◇ Using self-developed power supply, redundant dual power supply provides long-term stable PoE power output.
- ◇ Low power consumption, with fan, galvanized steel housing, and excellent heat dissipation to ensure stable operation of the switch.

■ Easy O&M management

- ◇ CPU monitoring, memory monitoring, and Ping detection.
- ◇ System logs and port traffic statistics facilitate network optimization and transformation.
- ◇ LLDP facilitates the network management system to query and determine the communication status of the link.
- ◇ Web network management, CLI (Console, Telnet), SNMP (V1/V2/V3), Telnet, and other diversified management and maintenance methods.

TECHNICAL SPECIFICATION

Model	BI8124PGM4F-400WS	

BI8124PGM4F-400WS

28-Port Gigabit Managed Industrial PoE Switch

Datasheet



Interface Characteristics	
Fixed Port	2*AC100-240V input ports 1*RS232 Console port (115200, N, 8,1) 24*10/100/1000Base-T PoE ports (Data/ Power) 4*100/1000Base-X uplink SFP fiber ports (Data) 1 set DC48-57V input ports (support reverse connection protection)
Ethernet Port	Port 1-24 cab support 10/100/1000Base-T(X) auto-sensing, full/ half duplex MDI/ MDI-X self-adaption
Twisted Pair Transmission	10BASE-T: Cat3,4,5 UTP (≤ 100 meters) 100BASE-TX: Cat5 or later UTP (≤ 100 meters) 1000BASE-T: Cat5e or later UTP (≤ 100 meters)
Optical Fiber Port	Gigabit optical fiber port, default no include optical modules (optional single-mode/ multi-mode, single fiber/ dual fiber optical module. LC)
Optical Cable/ Distance	Multi-mode: 850nm/ 0-550m, Single-mode: 1310nm/ 0-40km, 1550nm/ 0-120km.
Chip Parameter	
Network Management Type	L2+
Network Protocol	IEEE 802.3 10BASE-T, IEEE 802.3i 10Base-T, IEEE 802.3u 100Base-TX, IEEE 802.3ab 1000Base-T, IEEE 802.3z 1000Base-X, IEEE 802.3x
Forwarding Mode	Store and Forward (Full Wire Speed)
Switching Capacity	56Gbps (non-blocking)
Forwarding Rate@64byte	41.66Mpps
CPU	500M
DRAM	1G
FLASH	256M
MAC	8K
Buffer Memory	4.1M

BI8124PGM4F-400WS

28-Port Gigabit Managed Industrial PoE Switch

Datasheet



LED Indicator	Power: PWR (Yellow), System: SYS (Yellow), Fiber port: L/A (Green), PoE: PoE (Green), Network: Link/ Act (Yellow)	
Reset Switch	Yes, press and hold the switch for 10 seconds and release it to restore the factory settings	
PoE& Power Supply		
PoE Port	Port 1-24 IEEE 802.3 af/at	
PoE Management	Port PoE output on/off, Port PoE working status display	
Power Supply Pin	1/2(+) 3/6(-)	
Max Power Per Port	30W , IEEE 802.3 af/at	
Total PWR/ Input Voltage	400W/ (AC100-240V)	
Power Consumption	Standby<18W, Full Load<380W	
Power Supply	Built-in power supply, AC100~240V 50-60Hz, 5.0A	
Power Input Port	Alarm switch port, 2*AC power input ports, 2*DC48-57V input ports Dual input power port: AC power supply priority to support anti-reverse connection protection, and automatically switches to DC connection when power fails.	
Physical Parameter		
Operation Temp/ Humidity	-40~+80℃, 5%~90% RH Non condensing	
Storage Temp/ Humidity	-40~+85℃, 5%~95% RH Non condensing	
Dimension (L*W*H)	440*378*44.5mm	
Net /Gross Weight	5.4kg/ 6.2kg	
Installation	Desktop, 1U/19” cabinet	
Certification & Warranty		
Lightning Protection	IEC61000-4-3(RS):10V/m (80~1000MHz) FCC Part 15/CISPR22 (EN55022): Class A IEC61000-6-2 (Common Industrial Standard)	

BI8124PGM4F-400WS

28-Port Gigabit Managed Industrial PoE Switch

Datasheet



	IEC61000-4-9 (Pulsed magnet field): 1000A/m IEC61000-4-10 (Damped oscillation): 30A/m, 1MHz IEC61000-4-12/18 (Shockwave): CM 2.5kV, DM 1kV Protection level: IP30, Lightning protection: 6KV 8/20us IEC61000-4-4(EFT): Power cable: $\pm 4kV$, Data cable: $\pm 2kV$ IEC61000-4-16 (Common-mode transmission): 30V, 300V, 1s IEC61000-4-2 (ESD): $\pm 8kV$ contact discharge, $\pm 15kV$ air discharge IEC61000-4-6 (Radio frequency transmission): 10V(150kHz~80MHz) IEC61000-4-8 (Power frequency magnetic field): 100A/m,1000A/m, 1-3s IEC61000-4-5(Surge): Power cable: CM $\pm 4kV$ /DM $\pm 2kV$, Data cable: $\pm 4kV$
Mechanical Properties	IEC60068-2-6 (Anti Vibration), IEC60068-2-32 (Free Fall), IEC60068-2-27 (Anti Shock)
Certification	CCC, CE mark, commercial, CE/LVD EN62368-1, FCC Part 15 Class A, RoHS
Warranty	5 years, lifelong maintenance.
Network Management Feature	
Interface	IEEE802.3x flow control (Full duplex) Broadcast storm suppression based on port rate Port real-time traffic management (Flow Interval) Limit the rate of packet traffic on incoming and outgoing ports, mini granularity is 16Kbps and max is 1Gbps
L3 Feature	IPV4 static route/ default route
VLAN	Port configuration of Access, Trunk, Hybrid IEEE802.1q, Port-based VLAN (4K), VLAN based on the protocol

BI8124PGM4F-400WS

28-Port Gigabit Managed Industrial PoE Switch

Datasheet



Port Aggregation	LACP dynamic aggregation, Static aggregation, Max 14 aggregation groups and 8 ports per group
Spanning Tree	RSTP (IEEE 802.1w)
ERPS	ERPSv2
Multicast	Multicast VLAN, User quick exit mechanism, IGMP Snooping v1/v2
Port Mirroring	Bidirectional data mirroring based on port
QoS	802.1p/ DSCP priority mapping, Diff-Serv QoS Queue scheduling algorithm (SP, WRR, WFQ) Flow-based rate limiting, Flow-based packet filtering Flow-based based redirection, 8*Output queues of each port
ACL	Port-based and VLAN-delivered ACL The L2-L4 packet filtering function can match the first 80 bytes of the packet and provide information based on source MAC address, destination MAC address, source IP address, destination IP address, IP protocol type, TCP/UDP port, TCP/UDP port range to define the ACL.
Security	Port isolation, Port broadcast message suppression Port-based and Mac-based IEEE802.1X certification User hierarchical management and password protection AAA&RADIUS certification, IP source address protection
DHCP	DHCP Client, DHCP Snooping

BI8124PGM4F-400WS

28-Port Gigabit Managed Industrial PoE Switch

Datasheet



Management

Web network management (https), Ping detection
NMS platform cluster management (LLDP+SNMP)
One click recovery, View CPU real-time utilization status
Link Layer Discovery Protocol (LLDP), System work log
Console/ Telnet and CLI configuration, SNMP V1/V2/V3
NTP clock, HTTP file upload and download management


System

Web browser: Mozilla Firefox 2.5 or higher, Google Chrome V42 or higher, Cat5 and above Ethernet cable

TCP/IP, network adapter, and network operating system (such as Microsoft

Windows, Linux, Mac OS X) installed on each computer in the network Cat5 and above Ethernet cable

DIMENSION

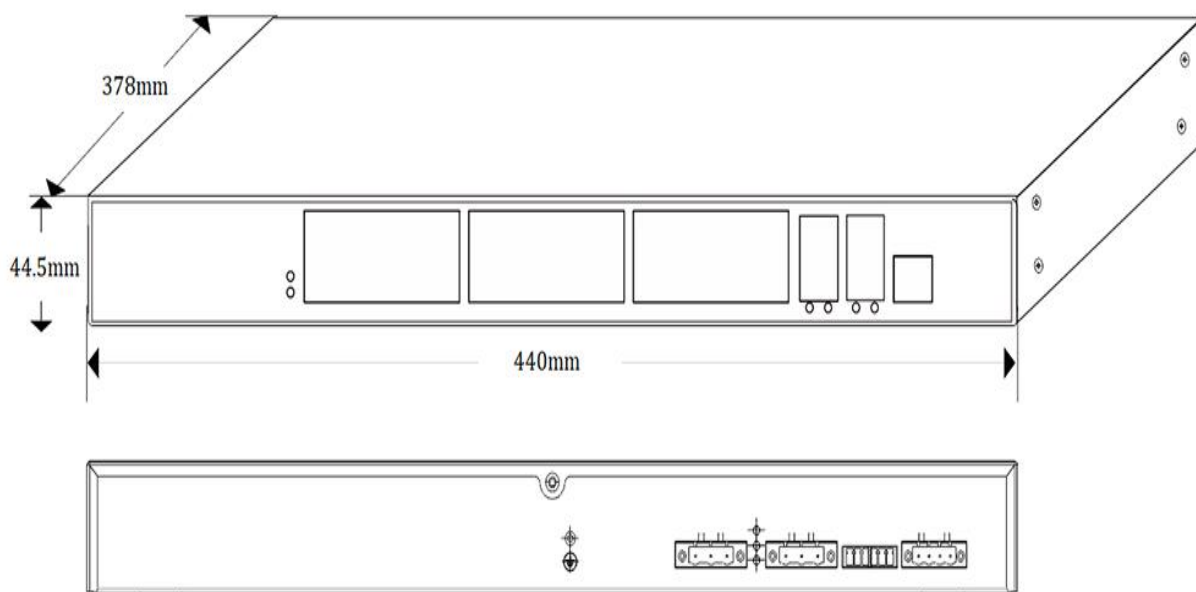


BI8124PGM4F-400WS

28-Port Gigabit Managed Industrial PoE Switch

Datasheet



APPLICATION

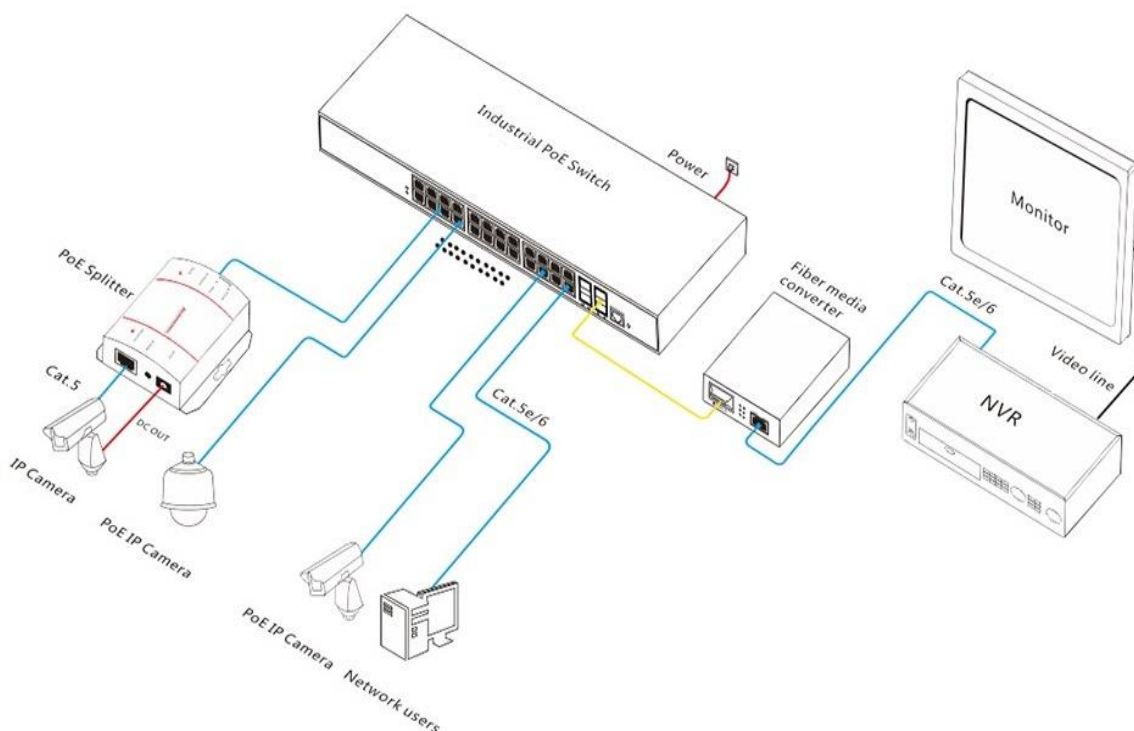

ORDERING INFORMATION

Model	Description	Built-in Power Supply
BI8124PGM4F-400WS	L2+ managed industrial PoE switch with 24*10/100/1000M RJ45 ports and 4*100/1000M uplink SFP fiber ports. Port 1-24 can support IEEE 802.3 af/at PoE standard. It built-in power supply and 1U/19" cabinet installation.	2*400W

Note: The optical module is not included and needs to be purchased.

BI8124PGM4F-400WS

28-Port Gigabit Managed Industrial PoE Switch

Datasheet



PACKING LIST

Packing List	Content	Qty	Unit
	28-port Gigabit managed industrial PoE switch	1	Set
	RJ45-DB9 Adapter Cable	1	PC
	AC Power Cable	1	PC
	Mounting Kit (Hanging Ear)	1	Set
	User Guide	1	PC