



5 ports Industrial switch BI605E series

❖ Overview

The BI604E1E is a 5-port industrial switch that supports up to 5 *10/100M RJ45 ports;

It supports relay alarm for power off, network broken.

It has a high anti-interference ability, the product supports 6KV surge protection, and 6KV contact / 8KV air ESD protection.

It supports wall hanging, desktop and Din-rail installation, reliable and durable, and can be used in security network video monitoring, network engineering and other occasions.

❖ Pictures



❖ Features

- ❖ With 5*10/100M RJ45 ports;
- ❖ Supports relay alarm for power off, network broken;
- ❖ Supports 6KV surge protection, 6KV contact / 8KV air ESD protection;
- ❖ Supports working temperature -30°C~65°C.



5 ports Industrial switch BI605E series


❖ Specifications

Parameter	Specifications
Power supply	Powered by power adaptor
Range of voltage	DC 12~60V
Consumption	Self-consumption<5W
Ethernet ports	Ports 1~5: 10/100Base-TX ports
Relay alarm	1 channel relay alarm output for power off, ports link down
Cable and distance	Use cat5e/6,100m max
Standard	IEEE802.3, IEEE802.3u, IEEE802.3z
Switch fabric	1 Gbps
Though put	0.74 Mpps
Buffer	1M
MAC address table	8K
Indicator	Power: 1 *red ; Ethernet ports 1~5: Green LEDs and yellow LEDs indicate Link/Act
Protection	Surge: 6KV, standard: IEC61000-4-5 ESD: 6KV: contact / 8KV: air, standard:IEC61000-4-2
Working temperature	-30°C~65°C
Storage temperature	-40°C~85°C
Humidity	0~95%(No condensation)
Dimension(LxWxH)	101mmx65mmx36mm
Material	Aluminum
Color	Black
Net-weight	350g



5 ports Industrial switch BI605E series

❖ Dimensions

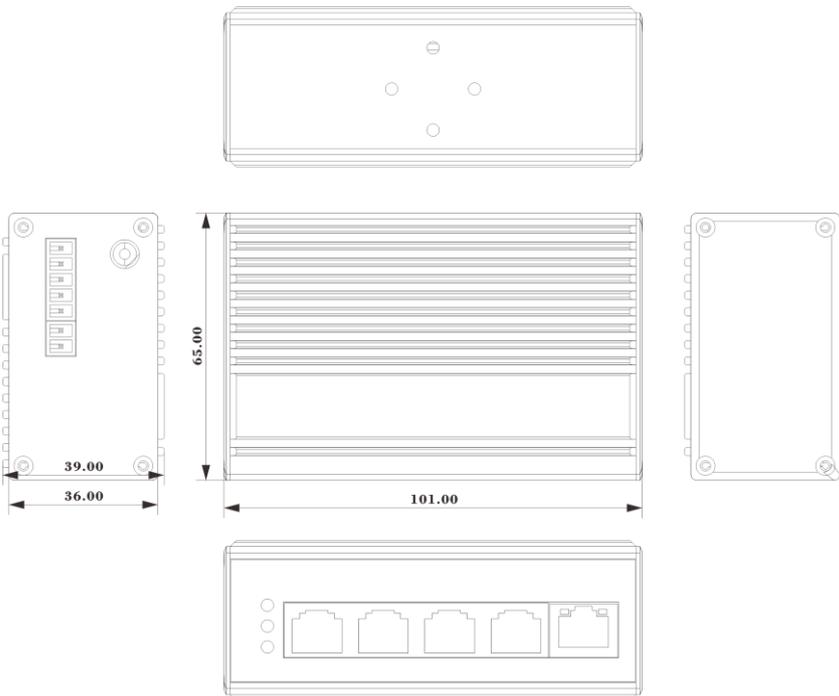

❖ Order information

Model	Description
BI604E1E	With 5*10/100M RJ45 ports; 2*DC12-60V power supply (Power adaptor buy extra); Supports relay alarm function for power off, network broken; -30~65°C.

BORN ELECTRONICS LIMITED

ADDRESS:

#94A
Goldsmith Avenue
London
United Kingdom
Phone: +4479 1989 8604
Email: info@bornelectronics.com

WARRANTY:

2 YEARS (EXPANDABLE UPTO 4 YEARS)

WEBSITE: <http://bornelectronics.com/>