

BI6204G2F

4-Port Gigabit Industrial Switch with 2G SFP Uplink

Datasheet



Key Features:

Ports: Provide 4*10/100/1000Mbps ports with 2* 1.25Gbps SFP

Self-adaption: RJ45 port supports 10/100/1000Mbps Auto MDI/MDIX

Industrial Installation: Din Rail mounting installation

Wide Application: Designed for Railway, traffic etc some Industrial environment

Surge protection: Protect the device from lighting surges and others electrical hazards

Working Temperature: -40 to 85 degrees operating temperature

Considerate Design: IP40 Industrial enclosure

Easy to use: Plug and play, No configuration required

Environmentally Hardened Design

With the **IP40** metal industrial case which provides a high level of immunity against electromagnetic interference and heavy electrical surges, Being able to operate under the temperature range from **-40 to 85 degrees C**, the BI6204G2F can be placed in almost any difficult environment.



Dual Power input for High Availability Network

Featuring a strong dual power input system with wide-ranging voltages (12V~54V DC) incorporated into customer's automation network to enhance system reliability and uptime which make the installation more flexible and convenient.

Surge Protection Design

provides contact discharge of $\pm 8\text{KV}$ DC and air discharge of $\pm 15\text{KV}$ DC for Ethernet ESD protection. It also supports $\pm 6\text{KV}$ surge immunity to improve product stability and protects users' networks from devastating ESD attacks, making sure the flow of operation does not fluctuate.



Gigabit SFP Uplink Port

With two SFP module slot available, the SFP uplink port is ideal for connecting the switch to the network's backbone, providing more than enough bandwidth and stability for ultra high speed data transferring, Beside the SFP can transmitte the date with Max 100Km distance with more economic solution.



BI6204G2F

4-Port 10/100/1000Mbps Industrial Switch with 2 Gigabit SFP

Technical Datasheet


Model	BI6204G2F		
Hardware Specifications			
ports	4* 10/100/1000BASE-T RJ45 auto-MDI/MDI-X ports 2* 1.25Gbps SFP Slot		
Connector	Removable 4-pin terminal block Pin 1/2 for Power 1; Pin 3/4 for Power 2		
LED Display	Power Indicator: PWR(green).Network Indicator: Link(yellow) SFP: Green		
Power requirements	12~54V DC		
Power Consumption	Less than 3 Watts		
Switch Performance	Backplane bandwidth		20Gbps
	Packet forwarding rate		5.96Mpps
	MAC address		8k
	Flow control	Back pressure for half duple. IEEE 802.3x pause frame for full duplex	
Network standard	IEEE802.3i 10 BASE-T		
	IEEE802.3u 100 BASE-TX		
	IEEE802.3ab 1000BASE-T		
	IEEE802.3x Flow Control		
	IEEE802.3az EEE		
Enclosure	IP40 Metal case		
ESD Protection	6KV ESD		
Dimension(W x D x H)	30 x 90 x 130mm (1.18in x 3.54in x 5.12in)		
Weight	0.7Kg		
Environment			
Environment specification	Operating temperature: -40℃~85℃， operating humidity: 5%~95%		
	Storage temperature: -40℃~85℃， storage humidity: 5%~95%		
Warranty	5 Years		

BI6204G2F


4-Port 10/100/1000Mbps Industrial Switch with 2 Gigabit SFP

Installation Models

Power Terminal




- ◆ 4-pin 3.81mm-spacing plug-in terminal
- ◆ 12V-54VDC wide voltage input
- ◆ P1&P2 dual power input
- ◆ Reverse protection

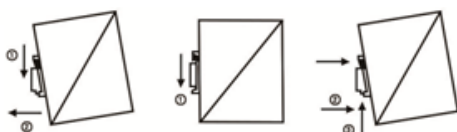


Din-Rail

Earth Protection




Ground screw

Mechanical Drawing

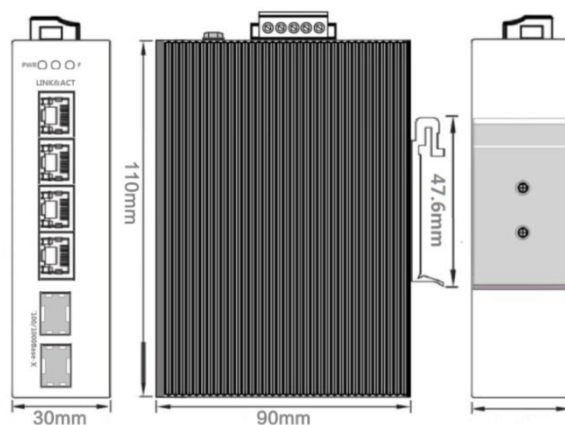

Applications

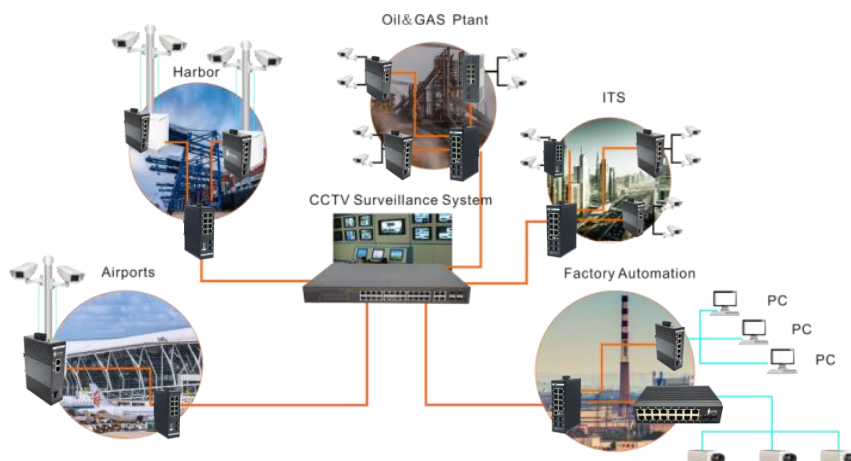

Ordering Information

BI6204G2F

4 Ports 10/100/1000Mbps Industrial Unmanaged Switch With 2 Gigabit SFP, Din Rail



337 Forest Road
London, United Kingdom



+44 7859 571344



Info@bornelectronics.com



<https://bornelectronics.com>